




White Paper

Huawei WLAN Smart Antenna Technology White Paper

Version 1.0

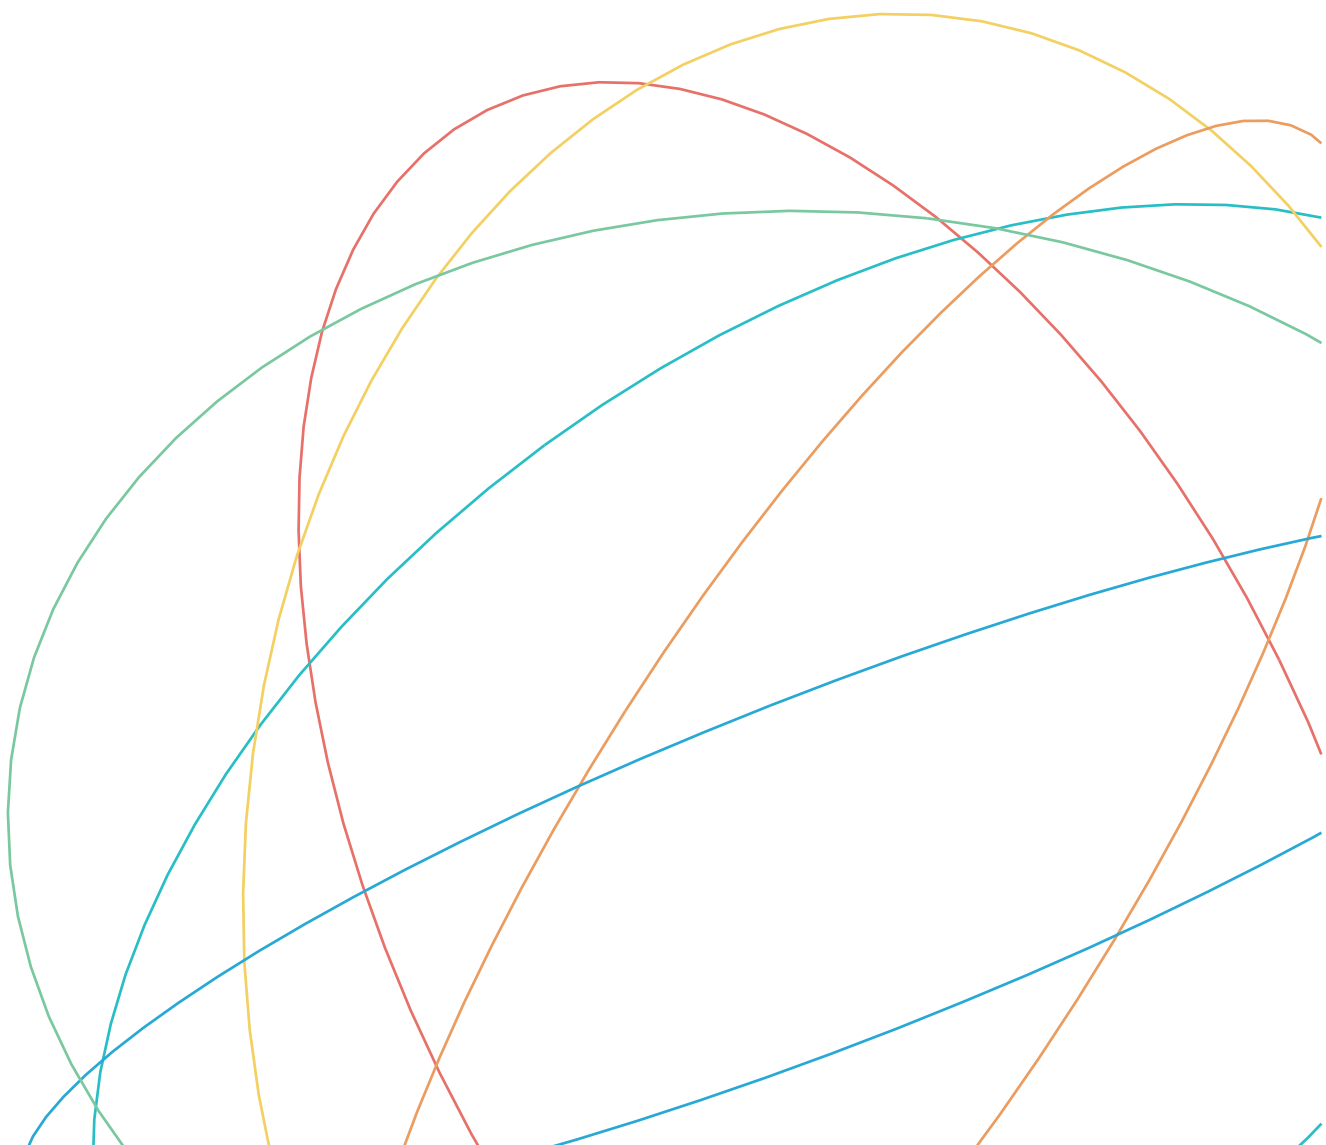

Preface

Keywords:

Antenna array, antenna selection algorithm

Abstract:

Smart antenna technology concentrates energy on the receive end by adjusting the transmit parameters on the transmit end to enhance signal coverage and increase AP capacity. This document describes how Huawei-developed smart antennas and antenna selection algorithm are implemented, and their major applications on networks.

Acronyms and Abbreviations

Acronym/Abbreviation	Full Name
STA	Station
AP	Access point
PER	Packet error rate
RSSI	Received signal strength indicator
SU	Single user
MU	Multi-user
MIMO	Multiple-input multiple-output

Contents

Preface	ii
1 Background	1
2 Implementation	2
2.1 Smart Antenna Array	2
2.2 Antenna Selection Algorithm	5
2.2.1 Antenna Training and Selection.....	5
2.2.2 Antenna Training Triggering	6
3 Customer Benefits	8
4 Typical Application	9

1 Background

Along with the continued development of the IEEE 802.11 protocol family, the physical-layer transmission rate of Wi-Fi products increases sharply. Currently, the physical-layer rate of 802.11ax products reaches up to 10 Gbit/s, which is several times that of 802.11ac Wave 2 products. The high physical-layer rate contributes to good user experience, which also requires a supportive radio environment. In practice, however, Wi-Fi coverage holes may be easily generated by weak signals or even no signals in complex network environments.

In the current Wi-Fi network environment, three major difficulties need to be overcome:

1. Coverage for STAs at the Wi-Fi network edge
Most APs use omnidirectional antennas with a limited antenna gain. Such APs can provide good services for short-distance STAs, but can provide only low-throughput services or no service for medium- and long-distance STAs.
2. Coverage over obstacles
It is difficult to provide high-throughput coverage service for STAs over obstacles.
3. High-density coverage
In high-density networking, multi-user concurrency greatly increases interference between links. Despite downlink multi-user multiple-input multiple-output (MU-MIMO) introduced in 802.11ac, the downlink transmission throughput still needs to be increased.

To overcome these difficulties and provide better coverage services in the Wi-Fi network environment, Huawei launches the smart antenna solution. The smart antenna hardware is an antenna array consisting of multiple antennas. According to the antenna selection algorithm, specific antenna elements are selected to transmit and receive signals. Combining different antennas can form different signal transmission directions, providing STAs at different locations with optimal antenna combinations to improve received signal quality and system throughput.


This document describes the implementation of Huawei smart antenna technology and its typical applications.

2 Implementation

In the WLAN industry, smart antenna technology is implemented in two parts: One is the antenna array, that is, the antenna hardware, and the other is the antenna selection algorithm, that is, how to select antennas in an antenna array.

Antenna array implementation is a beam switching technology. An antenna array has multiple hardware antennas and intelligently selects multiple antenna elements based on the antenna selection algorithm to transmit and receive radio signals. Combining different antennas can form different signal transmission directions, providing STAs at different locations with optimal antenna combinations to improve received signal quality and system throughput.

Figure 2-1 Antenna beam switching diagram

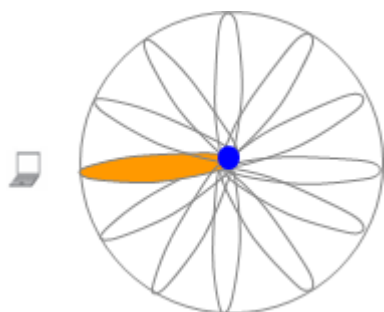

The smart antenna selection algorithm is an important part of the WLAN link self-adaptation feature. By sending packets to STAs, STA locations can be determined. The smart antenna selection algorithm can then select appropriate antenna combinations from an antenna array to improve network performance. Directional beams are used to replace original omnidirectional beams to concentrate the energy, improving received signal quality and system throughput.

[2.1 Smart Antenna Array](#)


[2.2 Antenna Selection Algorithm](#)

2.1 Smart Antenna Array

An antenna array is made up of a series of small antennas. Each small antenna can be an omnidirectional antenna or a directional antenna. The antenna arrangement depends on the

gain, polarization mode, and radiation pattern of small antennas. The number of small antennas determines the number of final beams.


Figure 2-2 Smart antenna array arrangement

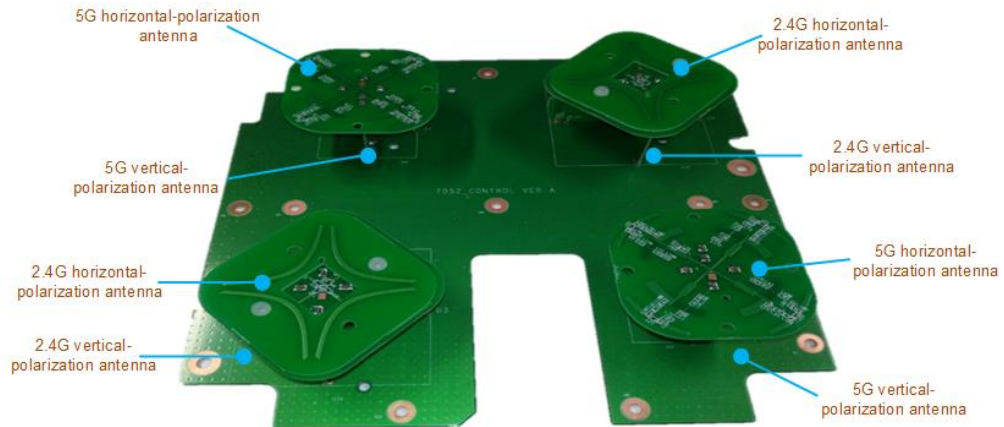

Huawei WLAN smart antennas are designed based on dual-band hybrid and dual-polarization overlap. The dual-band hybrid solution reduces the coupling between antennas and improves the radiation efficiency. Dual-polarization overlap miniaturizes antennas to save space and simplify the AP design. Four small antennas are available on each of the 2.4 GHz and 5 GHz frequency bands. Therefore, the entire antenna consists of eight small antennas.

As shown in the preceding figure, the upper left and lower right antennas are 5 GHz horizontal- and vertical-polarization antennas, respectively; the lower left and upper right antennas are 2.4 GHz horizontal- and vertical-polarization antennas, respectively. Four beamforming structures are evenly distributed within the 360-degree scope of each antenna. The switch in the middle of each structure can be independently controlled. Each small antenna has 16 modes according to the switches in different directions. Four antennas are available on each frequency band. Therefore, a total of 4^{16} antenna combinations are supported on a single frequency band. Based on theoretical analysis, the following five modes are selected from the 16 modes of each small antenna as the working mode of the antenna:

- Omnidirectional antenna mode, numbered 2
- Directional antenna modes in horizontal four directions, numbered 0, 1, 3, and 4, respectively

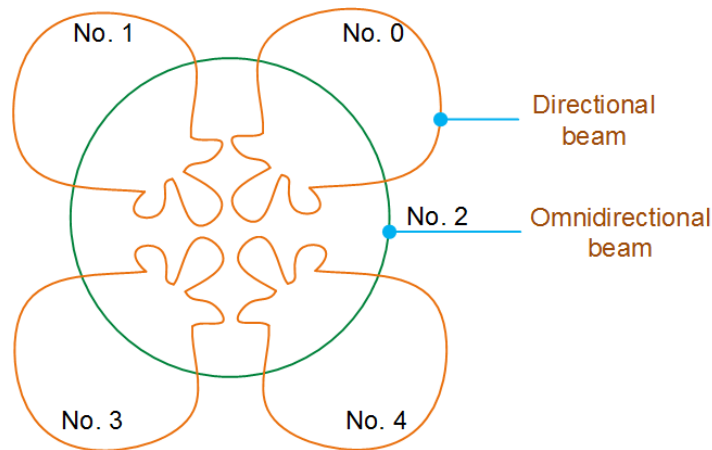Figure 2-3 Five beams of a small antenna

There are four antennas on a single frequency band, each of which supports five available working modes. Therefore, 5^4 single-frequency array combinations are available. If too many antenna combinations are used, take performance loss generated during antenna selection and actual antenna combination test results into consideration.

Table 2-1 lists 15 combinations that can be used as available array combinations for smart antennas. Two working modes for antennas are specified: basic and enhanced. In basic mode, all the four antennas direct to the same direction. In enhanced mode, the horizontal- and vertical-polarization antennas direct to different directions. In the following table, the first two bits of a combination mode indicate the horizontal-polarization antenna, and the last two bits indicate the vertical-polarization antenna.

Table 2-1 Combination index table of the four antennas

Antenna Index	Combination Mode	Mode Description	Antenna Index	Combination Mode	Mode Description
0	0000	Basic	16	3322	Enhanced
1	1111	Basic	17	4400	Enhanced
2	2222	Basic	18	4411	Enhanced
3	3333	Basic	19	4433	Enhanced
4	4444	Basic	20	4422	Enhanced
9	1100	Enhanced	21	2200	Enhanced
13	3300	Enhanced	22	2211	Enhanced
14	3311	Enhanced			


2.2 Antenna Selection Algorithm

Through training packets sent to different antenna combinations, the antenna selection algorithm can select the most appropriate antenna combination for STAs based on the packet error rate (PER) and received signal strength indicator (RSSI) provided by the STAs.


2.2.1 Antenna Training and Selection

Antennas in a system can work in three states: default, pre-training, and training states. The smart antenna selection algorithm is implemented based on the three-state conversion of antennas.

Figure 2-4 Working state switching of antennas

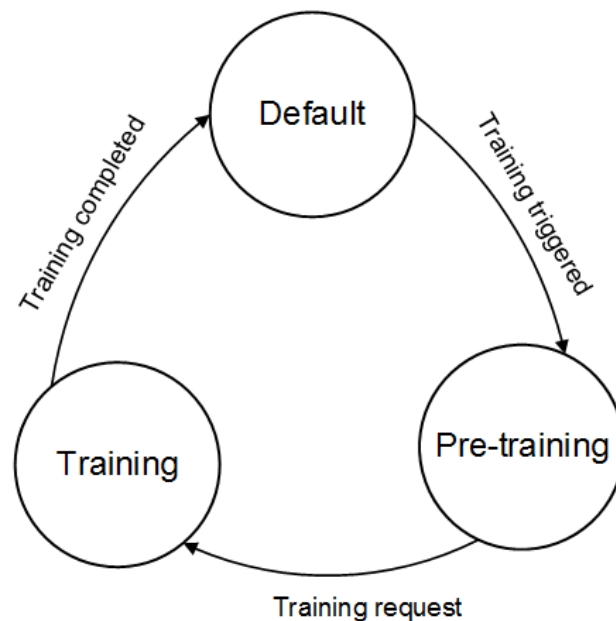

- **Default working state**
Antennas in default state work properly with the current configuration without training. In this mode, however, the working state of an antenna is detected. When an antenna training triggering request is received or a sudden performance change occurs, the system sets the training request and triggers the training operation.
- **Pre-training state**
Antennas enter this state to reduce the time and channel occupation during training. The training configuration of smart antennas is provided through implementation of the rate adaptation algorithm. The training request is set and training is triggered only when the number of training packets is no smaller than that specified by the system.
- **Training state**
In this state, the system traverses all antenna combinations based on the antenna configuration to find the optimal antenna combination.

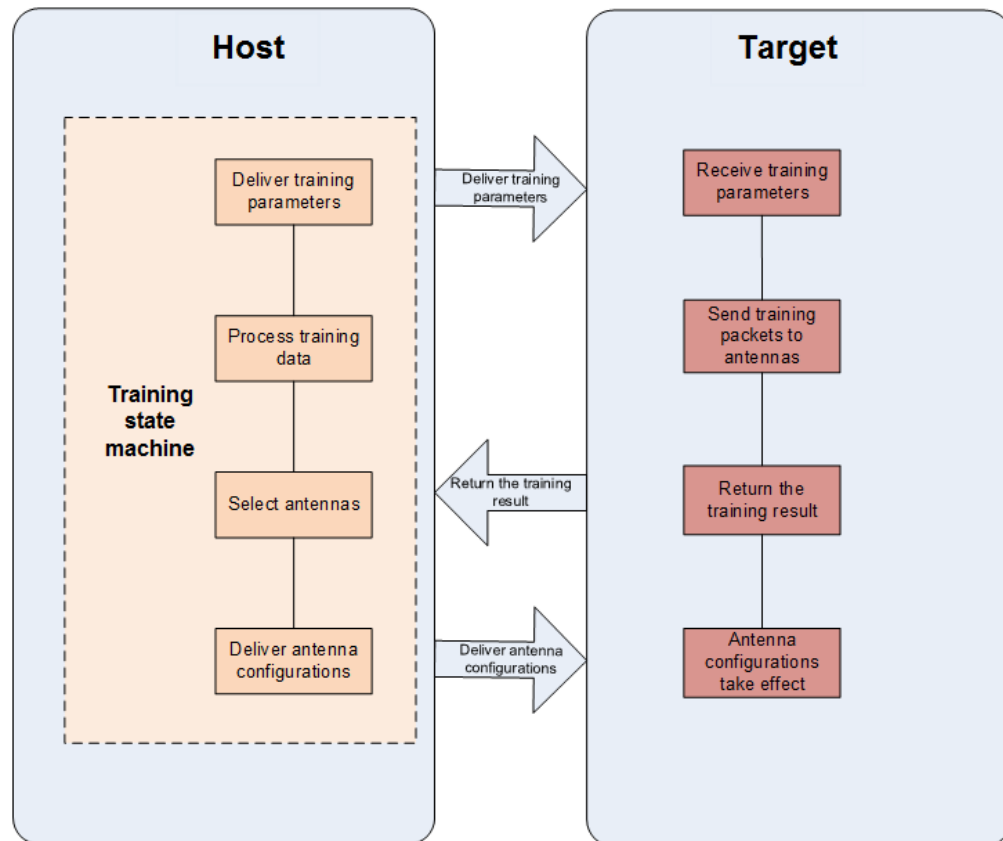Figure 2-5 Antenna training and selection

As shown in Figure 2-5, the Host maintains a training state machine, delivers training parameters, processes training data, selects antennas after training, and delivers antenna configurations. The Target receives training parameters from the Host, sends training packets, reports training results, and enables antenna configurations to take effect.

In MU-MIMO scenarios, after multiple users are paired, the antenna mode in multi-user (MU) mode is selected based on the antenna mode selected in single-user (SU) mode.

- If the antenna mode selected in MU mode is the same as that in SU mode, the antenna mode in MU-MIMO scenarios remains unchanged.
- If the antenna mode selected in MU mode is different from that in SU mode, the omnidirectional antenna mode is used in MU-MIMO scenarios.

2.2.2 Antenna Training Triggering

Antenna training can be triggered periodically or based on sudden performance changes.

Periodic Triggering

If the running time after the previous training exceeds the preset time period, re-training is triggered. The triggering interval is dynamically adjusted based on the number of STAs. A large number of access STAs requires a long triggering interval. This prevents frequent antenna training from occupying system performance and causing poor user experience.

Table 2-2 Mapping between the number of access STAs and the training interval

Number of Access STAs	≤ 5	$5 < \text{Number} \leq 10$	$10 < \text{Number} \leq 20$	> 20
Training Interval (s)	30	100	180	300

Triggering Based on Sudden Performance Changes

After becoming stable, the system collects the throughput and calculates the average accumulated throughput in a period as the reference value. The difference between the reference value and throughput of the current node is compared against the preset threshold. If the difference exceeds the threshold for multiple times, the performance of the current node fluctuates greatly. In this case, the re-training mechanism is triggered.

3 Customer Benefits

1. Better coverage

Smart antennas provide better coverage in the target area. The four-sector design of antennas provides higher coverage strength. Antenna combinations in different directions in an antenna array provide longer-distance coverage than omnidirectional antennas, and are more flexible than directional antennas. In a complex radio environment, for example, when the multipath effect is obvious or signal attenuation is obvious due to obstacles or distance increase, smart antennas can be used to improve coverage.

2. Higher throughput

By selecting proper antenna combinations, smart antennas can improve the coverage of the target area and improve the throughput for STAs. The combination of the antenna selection algorithm and MU-MIMO enables STAs in the same direction to use the same directional beam for transmission. This greatly improves the data throughput and reduces mutual interference between STAs.

3. High reliability

The smart antenna algorithm can detect performance changes of antennas in the current working mode. If the performance changes frequently, the air interface environment has deteriorated. The smart antenna algorithm can quickly select the optimal antenna combination in such an environment by training, ensuring stable throughput in any environment and providing better user experience.


4 Typical Application

Smart antenna technology uses the dual-band hybrid and dual-polarization overlay miniaturization design. Compared with dual-band smart antennas in the industry, Huawei's smart antennas provide higher radiation efficiency. The four-sector design also achieves higher gains than three-sector antennas in the industry.

1. Medium- and long-distance network coverage


When an AP sends data to STAs, the smart antenna algorithm selects the most suitable directional beam to replace the omnidirectional beam based on STA locations. The high-gain feature of the directional beam improves the AP's coverage capability for medium- and long-distance STAs, enhancing the coverage for edge STAs.

Figure 4-1 Smart antenna beam selection during long-distance and long-distance transmission

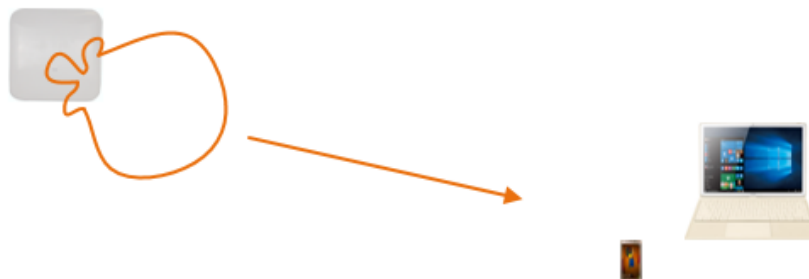

2. Complex radio environment


The antenna array of smart antennas provides better coverage in the target area. In an environment where radio signals need to penetrate floors and walls, directional beams have obvious penetration advantages due to their high gains. If obstacles that cannot be penetrated exist in the environment, smart antennas can select other directional beams for reflection and diffraction to overcome obstacles.

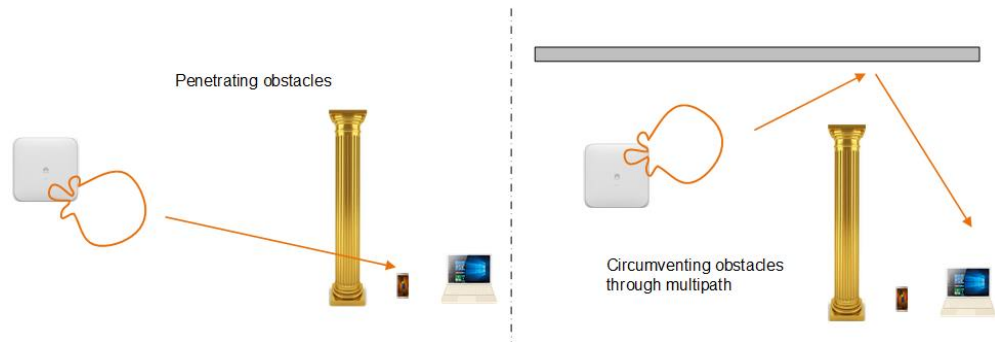Figure 4-2 Smart antenna beam selection when obstacles exist

(In the left figure, obstacles are penetrated. In the right figure, obstacles are circumvented through multipath.)

3. Concurrent downlink transmission for multiple STAs in high-density scenarios

In high-density scenarios, concurrent downlink traffic transmission is required (including downlink MU-MIMO). The directional beam selection supported by smart antennas aggregates STAs in the same direction to use the same directional beam for transmission. This improves the RSSI and reduces interference between STA data in different directions.

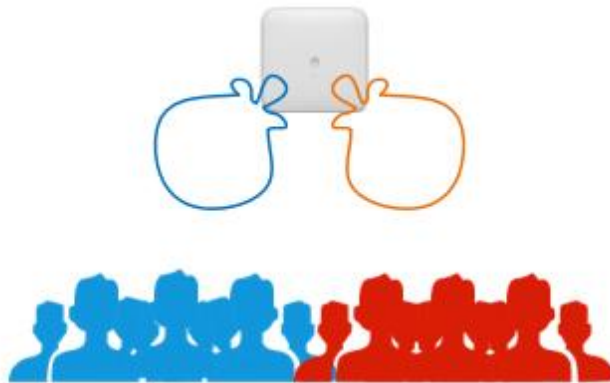Figure 4-3 Concurrent downlink transmission for multiple STAs in high-density scenarios

Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://www.huawei.com>

Email: support@huawei.com