

**BBU3910**

## **Description**

**Issue**        19  
**Date**         2018-03-29

**Copyright © Huawei Technologies Co., Ltd. 2018. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

## **Trademarks and Permissions**



and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

## **Huawei Technologies Co., Ltd.**

Address: Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

Website: <http://www.huawei.com>

Email: [support@huawei.com](mailto:support@huawei.com)

---

# Contents

---

<b>1 Introduction .....</b>	<b>1</b>
1.1 Functions .....	1
1.2 Exterior .....	2
1.3 Boards.....	2
1.3.1 UMPT .....	2
1.3.2 GTMU .....	6
1.3.3 UBBP.....	8
1.3.4 UBR1b.....	10
1.3.5 UTRP.....	11
1.3.6 USCU .....	13
1.3.7 UPEU.....	14
1.3.8 UEIU.....	15
1.3.9 FAN .....	16
1.3.10 UCCU .....	17
1.4 Board Configuration .....	19
1.4.1 Board Configuration for a Single-RAT BBU3910.....	19
1.4.2 Board Configuration for a BBU3910 Working in Separate-MPT Scenarios .....	20
1.4.3 Board Configuration for a BBU3910 Working in Co-MPT Scenarios .....	23
<b>2 Technical Specifications.....</b>	<b>25</b>
2.1 Baseband Specifications .....	25
2.1.1 GSM Baseband Specifications .....	25
2.1.2 UMTS Baseband Specifications .....	26
2.1.3 LTE Baseband Specifications .....	26
2.1.3.1 LTE FDD Baseband Specifications.....	26
2.1.3.2 LTE NB-IoT Baseband Specifications .....	29
2.1.3.3 LTE FDD+NB-IoT Baseband Specifications .....	32
2.1.3.4 LTE TDD+NB-IoT Baseband Specifications .....	35
2.1.4 Co-BBP Baseband Specifications.....	36
2.2 Capacity Specifications.....	41
2.2.1 GSM Capacity Specifications.....	41
2.2.2 UMTS Capacity Specifications .....	42
2.2.3 LTE Capacity Specifications .....	42

---

2.2.3.1 LTE FDD Capacity Specifications.....	42
2.2.3.2 LTE NB-IoT Capacity Specifications .....	43
2.2.3.3 LTE FDD+NB-IoT Capacity Specifications.....	44
2.2.3.4 LTE FDD+TDD Capacity Specifications.....	44
2.2.4 Multi-RAT Capacity Specifications .....	45
2.3 Signaling Specifications .....	47
2.3.1 LTE Signaling Specifications .....	47
2.3.1.1 LTE FDD Signaling Specifications.....	47
2.3.1.2 LTE NB-IoT Signaling Specifications .....	48
2.3.1.3 LTE FDD+NB-IoT Signaling Specifications.....	49
2.3.1.4 LTE FDD+TDD Signaling Specifications.....	49
2.3.2 Multi-RAT Signaling Specifications.....	50
2.4 CPRI Specifications.....	51
2.5 Transmission Port Specifications.....	54
2.6 Equipment Specifications .....	55
2.7 LTE Traffic Model.....	57
2.7.1 LTE FDD Traffic Model .....	57
2.7.2 LTE NB-IoT Traffic Model .....	60
<b>3 Acronyms and Abbreviations.....</b>	<b>62</b>

# 1 Introduction



## NOTE

- Unless otherwise specified, in this document, "LTE" refers to LTE FDD, LTE NB-IoT, LTE FDD+NB-IoT, and LTE FDD+TDD.
- In this document, "G" is short for GSM, "U" for UMTS, "L" for LTE FDD, "T" for LTE TDD, and "M" for LTE NB-IoT.

- 1.1 [Functions](#)
- 1.2 [Exterior](#)
- 1.3 [Boards](#)
- 1.4 [Board Configuration](#)

## 1.1 Functions

The BBU3910 is a baseband control unit. Compared with the BBU3900, its backplane has a higher switching capability and its baseband boards installed in slots 0 to 5 can process baseband signals. The BBU3910 performs the following functions:

- Manages the entire base station system in terms of operation and maintenance (OM) and system clock.
- Processes signaling messages.
- Provides physical ports for information exchange between the base station and the transport network.
- Provides an OM channel between the base station and the LMT, SMT, or U2000.
- Processes uplink and downlink baseband signals.
- Provides common public radio interface (CPRI) ports for communication with radio frequency (RF) modules.
- Provides ports for receiving and transmitting signals from environment monitoring devices.


A base station can be configured with a maximum of two interconnected BBU3910s, or one BBU3900 interconnected with one BBU3910 to provide higher processing capabilities.

## 1.2 Exterior

The BBU3910, 19 inches wide and 2 U high, is a case structure. It can be installed in an indoor or outdoor protective cabinet.

Figure 1-1 shows the exterior of the BBU3910.

**Figure 1-1** BBU3910 exterior

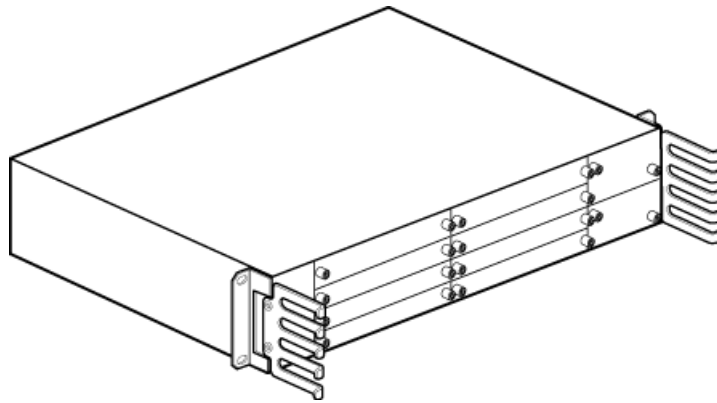

## 1.3 Boards

The BBU3910 can be configured with the following boards and units:

- Main control and transmission board: universal main processing and transmission unit b (UMPTb), UMPTe, GSM transmission and timing and management unit b (GTMUb), and GTMUc
- Baseband processing board: universal baseband processing unit d (UBBPd), and UBBPe
- Universal baseband radio interface unit b (UBRIb)
- Universal transmission processing unit: UTRPa and UTRPc
- Universal satellite card and clock unit b (USCUB)
- Universal power and environment interface unit d (UPEUd)
- Universal environment interface unit (UEIU)
- Fan unit: FANd and FANe

### 1.3.1 UMPT

The UMPT is a universal main control and transmission board, which can be applied to different radio access technologies (RATs). The UMPT falls into the following types:

- UMPTb1:
  - Pre-configured with the multi-RAT software
  - Supporting GSM, UMTS, and LTE FDD as of SRAN8.0
  - Supporting only UMTS in RAN14.0
  - Supporting GSM, UMTS, LTE FDD, and LTE TDD when used together with the USCUB as of SRAN9.0

- Adding the support for LTE NB-IoT as of SRAN12.1
- UMPTb2:
  - Pre-configured with the multi-RAT software
  - Supporting GSM, UMTS, and LTE FDD as of SRAN8.0
  - Supporting GSM, UMTS, LTE FDD, and LTE TDD as of SRAN9.0
  - Adding the support for LTE NB-IoT as of SRAN12.1
- UMPTb3:
  - Pre-configured with the multi-RAT software
  - Supporting GSM, UMTS, LTE FDD, and LTE TDD as of SRAN10.1
  - Adding the support for LTE NB-IoT as of SRAN12.1
- UMPTb9:
  - Pre-configured with the multi-RAT software
  - Supporting GSM, UMTS, LTE FDD, and LTE TDD as of SRAN10.1
  - Adding the support for LTE NB-IoT as of SRAN12.1
- UMPTe:
  - Pre-configured with the multi-RAT software
  - Supporting GSM, UMTS, LTE FDD, and LTE TDD as of SRAN11.1
  - Adding the support for LTE NB-IoT as of SRAN12.1

## Panel

Figure 1-2 shows the UMPTb1 panel.

**Figure 1-2** UMPTb1 panel





Figure 1-3 shows the UMPTb2 panel.

**Figure 1-3** UMPTb2 panel



PAA02C0019

Figure 1-4 shows the UMPTb3 or UMPTb9 panel.

**Figure 1-4** UMPTb3 or UMPTb9 panel


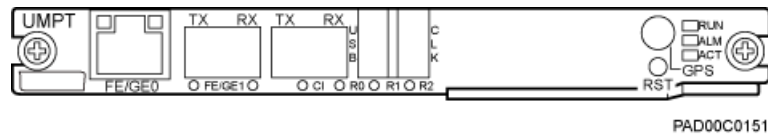


Figure 1-5 shows the UMPTe panel.

**Figure 1-5** UMPTe panel

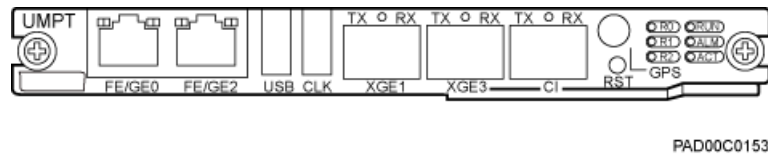

## Functions

The UMPT performs the following functions:

- Controls and manages the entire base station in terms of configuration, equipment, performance monitoring, radio resources, and active/standby switchovers.
- Processes signaling messages.
- Provides a reference clock, transmission ports, and an OM channel to the LMT or U2000.
- Interconnects two BBUs and exchanges control information, transmission information, and clock information.

## Ports

Table 1-1 describes the ports on the UMTPb1 or UMPTb2.

**Table 1-1** Ports on the UMTPb1 or UMPTb2

Silkscreen	Connector	Quantity	Description
FE/GE0	RJ45	1	FE/GE electrical port
FE/GE1	SFP	1	FE/GE optical port
CI	SFP female	1	Used for BBU interconnection
USB	USB	1	A USB flash drive can be inserted into the port for software upgrade and base station commissioning.
CLK	USB	1	Used for



Silkscreen	Connector	Quantity	Description
			multiplexing the time of day (TOD) clock and test clock
E1/T1	DB26 female	1	E1/T1 port supporting input and output of four E1s/T1s
GPS	SMA	1	<ul style="list-style-type: none"> <li>The GPS port on the UMPTb1 is reserved.</li> <li>The GPS port on the UMPTb2 is used for transmitting RF signals from the antenna to the satellite card.</li> </ul>
RST	N/A	1	Reset button

Table 1-2 describes the ports on the UMTPb3 or UMPTb9.

**Table 1-2** Ports on the UMTPb3 or UMPTb9

Silkscreen	Connector	Quantity	Description
FE/GE0	RJ45	1	FE/GE electrical port
FE/GE1	SFP	1	FE/GE optical port
CI	SFP female	1	Connects to the UCIU
USB	USB	1	A USB flash drive can be inserted into the port for software upgrade and base station commissioning.
CLK	USB	1	Used for multiplexing the TOD clock and test clock
GPS	SMA	1	<ul style="list-style-type: none"> <li>The GPS port on the UMPTb3 is reserved.</li> <li>The GPS port on the UMPTb9 is used for transmitting RF signals from the antenna to the satellite card.</li> </ul>
RST	N/A	1	Reset button

Table 1-3 describes the ports on the UMPTe.

**Table 1-3** Ports on the UMPTe

Silkscreen	Connector	Quantity	Description
FE/GE0 and FE/GE2	RJ45	2	FE/GE electrical port
XGE1 and XGE3	SFP	2	XGE optical port
CI	SFP female	1	Connects to the UCIU
USB	USB	1	A USB flash drive can be inserted into the port for software upgrade and base station commissioning.
CLK	USB	1	Used for multiplexing the TOD clock and test clock
GPS	SMA	1	Used for transmitting RF signals from the antenna to the satellite card.
RST	N/A	1	Reset button

### 1.3.2 GTMU

The GTMU is the main control and transmission board for the GSM network. The BBU3910 supports only the GTMU<sub>b</sub> and GTMU<sub>c</sub>.

#### Panel

Figure 1-6 shows the GTMU<sub>b</sub> panel.

**Figure 1-6** GTMU<sub>b</sub> panel


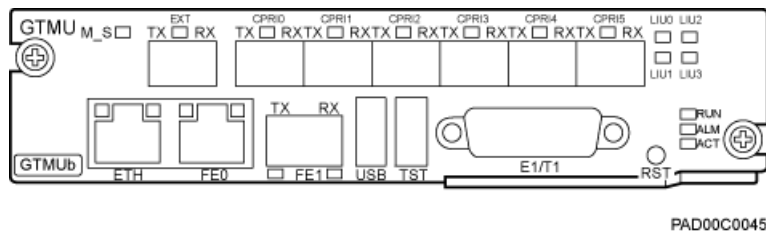


Figure 1-7 shows the GTMUc panel.

**Figure 1-7** GTMUc panel

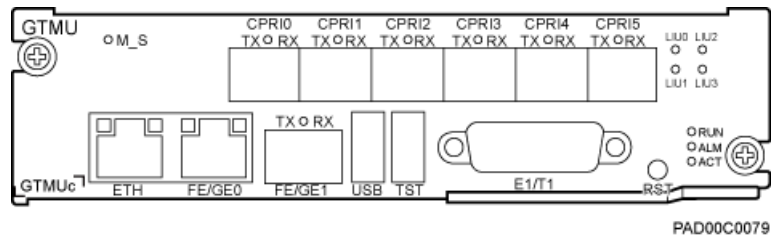

## Functions

The GTMU performs the following functions:

- Controls and manages the entire base station in terms of configuration, equipment, performance, security, and radio resources.
- Processes signaling messages.
- Provides a reference clock, an alarm input port, CPRI ports, transmission ports, and an OM channel to the LMT, SMT, or U2000.

## Ports

Table 1-4 lists the ports on the GTMUb.

**Table 1-4** Ports on the GTMUb

Silkscreen	Connector	Quantity	Description
CPRI0 to CPRI5	SFP female	6	Data transmission ports that interconnect with RF modules. These ports support input and output of electrical and optical signals.
EXT	SFP female	1	Reserved port
ETH	RJ45	1	Local maintenance and commissioning port
FE0	RJ45	1	FE electrical port
FE1	DLC	1	FE optical port
USB	USB	1	Software loading port
TST	USB	1	Clock test port

Silkscreen	Connector	Quantity	Description
E1/T1	DB26 female	1	E1/T1 port supporting input and output of four E1s/T1s
RST	N/A	1	Reset button

Table 1-5 lists the ports on the GTMUc.

**Table 1-5** Ports on the GTMUc

Silkscreen	Connector	Quantity	Description
CPRI0 to CPRI5	SFP female	6	Data transmission ports that interconnect with RF modules. These ports support input and output of electrical and optical signals.
ETH	RJ45	1	Local maintenance and commissioning port
FE0	RJ45	1	FE electrical port
FE1	DLC	1	FE optical port
USB	USB	1	Software loading port
TST	USB	1	Clock test port
E1/T1	DB26 female	1	E1/T1 port supporting input and output of four E1s/T1s
RST	N/A	1	Reset button

### 1.3.3 UBBP

The UBBP, a universal baseband processing unit, falls into the following two types:

- UBBPd, including UBBPd1, UBBPd2, UBBPd3, UBBPd4, UBBPd5, and UBBPd6
- UBBPe, including UBBPe1, UBBPe2, UBBPe3, and UBBPe4



**NOTE**

- The UBBPd is available as of SRAN9.0.
- The UBBPe1, UBBPe2, UBBPe3, UBBPe4 are available as of SRAN11.1.

- For details on the UBBPei, see *RMU3900A Description*.
- For details on the UBBPem, see *DBS5900 LTE TDD Product Description*.

The following table lists RATs supported by the UBBPd and UBBPe boards.

**Table 1-6** RATs supported by the UBBPd and UBBPe boards

Board	Supported RAT
UBBPd1	GSM, UMTS, GU
UBBPd2	GSM, UMTS, GU
UBBPd3	GSM, UMTS, LTE FDD, LTE NB-IoT, GU, GL, LM
UBBPd4	GSM, UMTS, LTE FDD, LTE NB-IoT, GU, GL, LM
UBBPd5	GSM, UMTS, LTE FDD, LTE NB-IoT, GU, GL, LM
UBBPd6	GSM, UMTS, LTE FDD, LTE NB-IoT, GU, GL, UL, UM, LM, GUL, ULM
UBBPe1	UMTS, LTE FDD, LTE NB-IoT, LM
UBBPe2	UMTS, LTE FDD, LTE NB-IoT, LM
UBBPe3	UMTS, LTE FDD, LTE NB-IoT, UL, UM, LM, ULM
UBBPe4	UMTS, LTE FDD, LTE NB-IoT, UL, UM, LM, ULM, TM



**NOTE**

- The UBBPd1, UBBPd2, UBBPd3, and UBBPd4 boards support only UMTS as of RAN15.0 SPC350.
- LTE NB-IoT, LM, and UM are available as of SRAN12.1.
- The UBBPe4, and UBBPe2 boards support TM as of SRAN13.1.
- ULM co-BBP is supported as of SRAN13.1.

## Panel


The UBBPd1, UBBPd2, UBBPd3, UBBPd4, UBBPd5, and UBBPd6 have the same panel, as shown in Figure 1-8.

**Figure 1-8** UBBPd panel



The UBBPe1, UBBPe2, UBBPe3, and UBBPe4 have the same panel, as shown in Figure 1-9.

**Figure 1-9** UBBPe panel

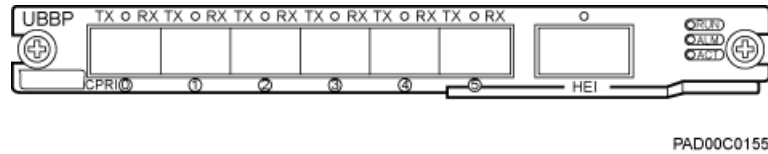

## Functions

The UBBP performs the following functions:

- Provides CPRI ports for communication with RF modules.
- Supports deployment of multiple RATs on one UBBP.

## Ports

Table 1-7 describes the ports on the UBBPd or UBBPe.

**Table 1-7** Ports on the UBBPd or UBBPe

Silkscreen	Connector	Quantity	Description
CPRI0 to CPRI5	SFP female	6	Data transmission ports that interconnect with RF modules. These ports support input and output of electrical and optical signals.
HEI	QSFP	1	Port that interconnects baseband processing boards for data communication

## 1.3.4 UBRiB

The UBRiB, a universal baseband radio interface board, is available as of SRAN8.0.

## Panel

Figure 1-10 shows the UBRiB panel.

**Figure 1-10** UBRiB panel



## Functions

The UBR1b performs the following functions:

- Provides extended CPRI electrical or optical ports.
- Provides CPRI convergence and forwarding.
- Connects to CPRI fiber optic cables of any RAT combination in a co-MPT GU, GL, or GUL scenario when the UBR1b is used together with the UBBP. For example, in a co-MPT GL base station, the UBR1b can connect to GO, LO, or GL RF modules using CPRI fiber optic cables.

## Ports

Table 1-8 lists the ports on the UBR1b.

**Table 1-8** Ports on the UBR1b

Silkscreen	Connector	Quantity	Description
CPRI0 to CPRI5	SFP	6	Data transmission ports that interconnect with RF modules. These ports support input and output of electrical and optical signals.  The CPRI ports support the data rate of 9.8 Gbit/s.

## 1.3.5 UTRP

The UTRP, a universal transmission processing unit, falls into the following two types: UTRPc and UTRPa.

### Panel

Figure 1-11 shows the UTRPc panel.

**Figure 1-11** UTRPc panel


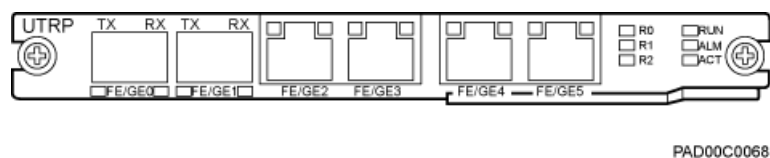


Figure 1-12 shows the UTRPa panel.

**Figure 1-12** UTRPa panel

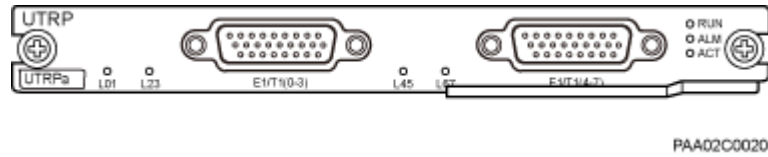

## Functions

- The UTRPc is available as of GBSS14.0, RAN14.0, eRAN3.0, and SRAN7.0. The UTRPc performs the following functions:
  - Provides transmission for the GSM, UMTS, and LTE networks and enables these networks to share the same IPsec tunnel.
  - Provides two 100 Mbit/s or 1000 Mbit/s Ethernet optical ports and performs Ethernet MAC layer functions, which include sending and receiving Ethernet link data and parsing MAC addresses.
  - Provides four 10 Mbit/s, 100 Mbit/s, or 1000 Mbit/s Ethernet electrical ports and performs the functions of the MAC layer and physical layer.
  - Supports co-transmission of GSM, UMTS, and LTE.
- The UTRPa is an extended transmission board for the UMTS network and is available as of RAN15.1. The UTRPa provides eight E1/T1 links, where ATM cell flows are inversely multiplexed and de-multiplexed, performs HDLC deframing and framing, and allocates and controls 256 HDLC timeslots.

## Ports

Table 1-9 lists the ports on the UTRPc.

**Table 1-9** Ports on the UTRPc

Silkscreen	Connector	Quantity	Description
FE/GE0 to FE/GE1	SFP female	2	FE/GE optical ports
FE/GE2 to FE/GE5	RJ45	4	FE/GE electrical ports

Table 1-10 lists the ports on the UTRPa.

**Table 1-10** Ports on the UTRPa

Silkscreen	Connector	Quantity	Description
E1/T1 (0 to 3)	DB26 female	1	E1/T1 ports providing four E1s/T1s numbered from 0 to 3
E1/T1 (4 to 7)	DB26 female	1	E1/T1 ports providing four E1s/T1s numbered



Silkscreen	Connector	Quantity	Description
			from 4 to 7


### 1.3.6 USCU

The USCU, a universal satellite card and clock unit, falls into the following two types: USCUB11 and USCUB14.

#### Panel

The USCUB11 and USCUB14 have the same panel, as shown in Figure 1-13.

**Figure 1-13** USCUB11 or USCUB14 panel



PAD00C0069

#### Functions

The USCU performs the following functions:

- The USCUB11 provides ports to communicate with the RGPS (for example the reused equipment of the customer) and BITS equipment. It does not support GPS signals.
- The USCUB14 does not support RGPS signals. It contains a UBLOX satellite card.

#### Ports

The ports on the USCUB11 and USCUB14 are the same. Table 1-11 lists the ports on the USCUB11 or USCUB14.

**Table 1-11** Ports on the USCUB11 or USCUB14

Silkscreen	Connector	Quantity	Description
GPS	SMA	1	The GPS ports on the USCUB14 receive GPS signals. The GPS port on the USCUB11 is reserved and cannot receive GPS signals.
RGPS	PCB welded wiring terminal	1	<ul style="list-style-type: none"> <li>• The RGPS port on the USCUB11 receives RGPS signals.</li> </ul>

Silkscreen	Connector	Quantity	Description
			<ul style="list-style-type: none"> <li>The RGPS port on the USCUB4 is reserved and cannot receive RGPS signals.</li> </ul>
TOD0	RJ45	1	Receives or transmits 1PPS+TOD signals.
TOD1	RJ45	1	Receives or transmits 1PPS+TOD signals, and receives TOD signals from the M1000.
M-1PPS	SMA	1	Receives 1PPS signals from the M1000.
BITS	SMA	1	Receives BITS clock signals, and supports adaptive input of 2.048 MHz and 10 MHz clock sources.



**NOTE**

GSM and UMTS do not support 1PPS+TOD clock signals.


### 1.3.7 UPEU

The UPEU is a universal power and environment interface unit for the BBU. The BBU3910 supports only the UPEUd.

#### Panel

Figure 1-14 shows the UPEUd panel.

**Figure 1-14** UPEUd panel

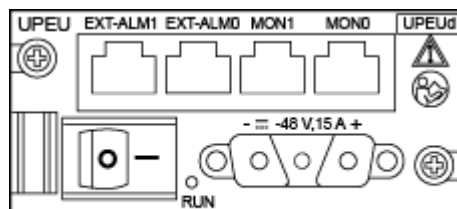

PAA02C0030

## Functions

- Converts –48 V DC input power into +12 V DC and provides an output power of 650 W.
- Provides two ports with each transmitting one route of RS485 signals and two ports with each transmitting four routes of Boolean signals. The Boolean signals can only be dry contact or open collector (OC) signals.

## Ports

Table 1-12 lists the ports on the UPEUd.

**Table 1-12** Ports on the UPEU

Silkscreen	Connector	Quantity	Description
–48 V	3V3	1	Port for –48 V DC power input
EXT-ALM0	RJ45	1	Port for Boolean inputs 0 to 3
EXT-ALM1	RJ45	1	Port for Boolean inputs 4 to 7
MON0	RJ45	1	Port for RS485 input 0
MON1	RJ45	1	Port for RS485 input 1


## 1.3.8 UEIU

The UEIU, a universal environment interface unit, transmits information reported by the environment monitoring device and alarm information to the main control board.

## Panel

Figure 1-15 shows the UEIU panel.

**Figure 1-15** UEIU panel

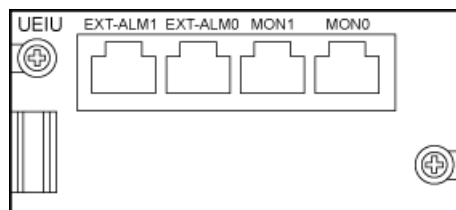

PAD00C0061

## Functions

The UEIU performs the following functions:

- Provides two ports, each transmitting one route of RS485 signals.
- Provides two ports, each transmitting four routes of Boolean signals, which can only be dry contact or OC signals.
- Transmits information reported by the environment monitoring device and alarm information to the main control board.

## Ports

Table 1-13 describes the ports on the UEIU.

**Table 1-13** Ports on the UEIU

Silkscreen	Connector	Quantity	Description
EXT-ALM0	RJ45	1	Port for Boolean inputs 0 to 3
EXT-ALM1	RJ45	1	Port for Boolean inputs 4 to 7
MON0	RJ45	1	Port for RS485 input 0
MON1	RJ45	1	Port for RS485 input 1


## 1.3.9 FAN

The FAN is a fan unit for the BBU3910 and falls into two types: FANd and FANe.

## Panel

Figure 1-16 shows the FANd panel.


**Figure 1-16** FANd panel

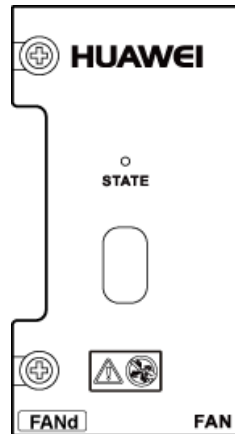

PAA02C0028

Figure 1-17 shows the FANd panel.

**Figure 1-17** FANe panel

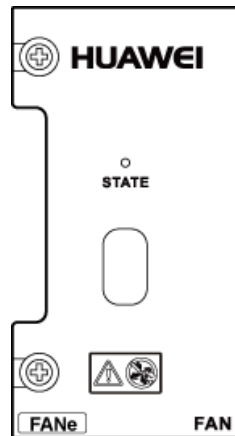

PAA02C0031

## Functions

The FANd and FANe perform the following functions:

- Controls the rotation speed of the fans and monitors the temperature of the fan module.
- Reports the status of the fans and the fan module to the BBU and dissipates heat from the BBU.

## 1.3.10 UCCU

The UCCU, a universal inter-connection combo unit, allows a long-distance connection between the BBU and USU, allowing a remote distance connection in BBU interconnection scenarios.

## Panel

Figure 1-18 shows the UCCU panel.

**Figure 1-18** UCCU panel



## Functions

The UCCU exchanges baseband data between BBUs, allowing a long-distance connection between the BBU and USU in BBU interconnection scenarios.

## Ports

Table 1-14 lists the ports on the UCCU.

**Table 1-14** Ports on the UCCU


Silkscreen	Connector	Quantity	Description
M0 to M3	QSFP	4	Function as primary interconnection ports and connect to secondary interconnection ports. Each optical port has two CPRI TX/RX channels with a maximum rate of 10.1376 Gbit/s and two SRIO TX/RX channels with a maximum rate of 6.25 Gbit/s.
M4/S1	QSFP	1	Functions as a primary interconnection port and connects to a secondary interconnection port. Has two CPRI TX/RX channels with a maximum rate of 10.1376 Gbit/s and two SRIO TX/RX channels with a maximum

Silkscreen	Connector	Quantity	Description
			rate of 6.25 Gbit/s.
M5/S0	QSFP	1	Functions as a secondary interconnection port and connects to a primary interconnection port. Has four 10GE TX/RX channels.


## 1.4 Board Configuration

### 1.4.1 Board Configuration for a Single-RAT BBU3910


**Figure 1-19** Typical board configuration for a BBU3910 working in GSM (eGBTS)

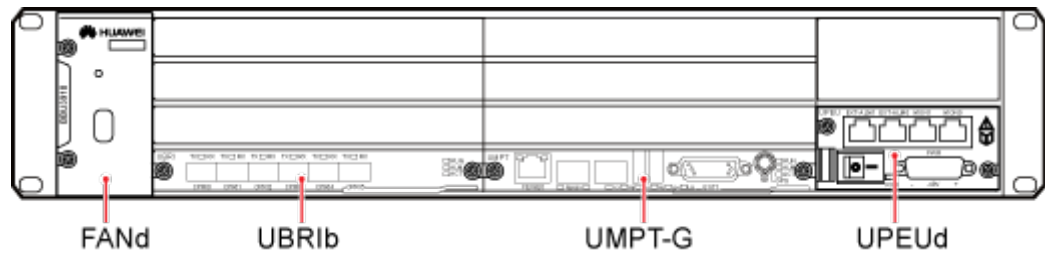


**Figure 1-20** Typical board configuration for a BBU3910 working in GSM (GBTS)

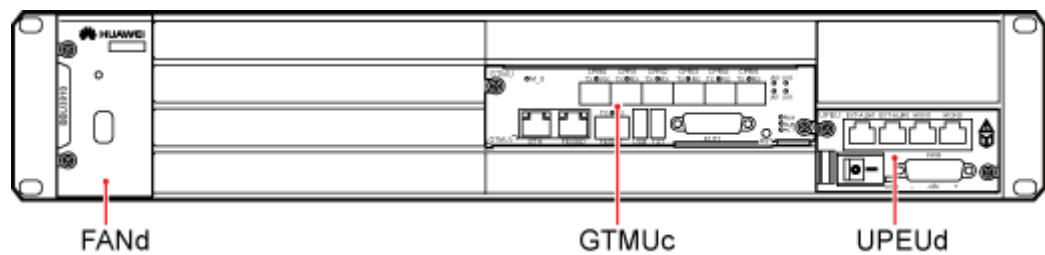

**Figure 1-21** Typical board configuration for a BBU3910 working in UMTS

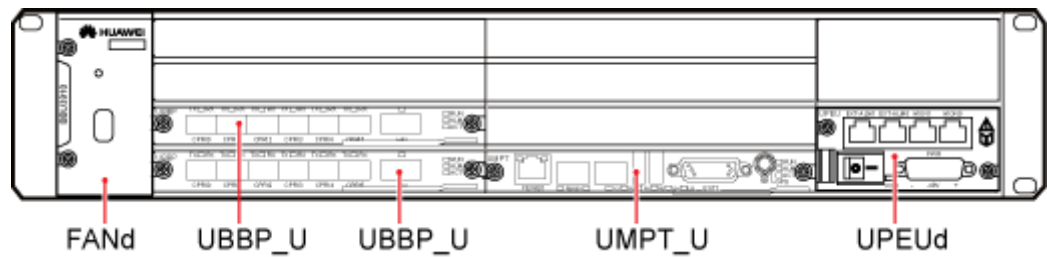

**Figure 1-22** Typical board configuration for a BBU3910 working in LTE

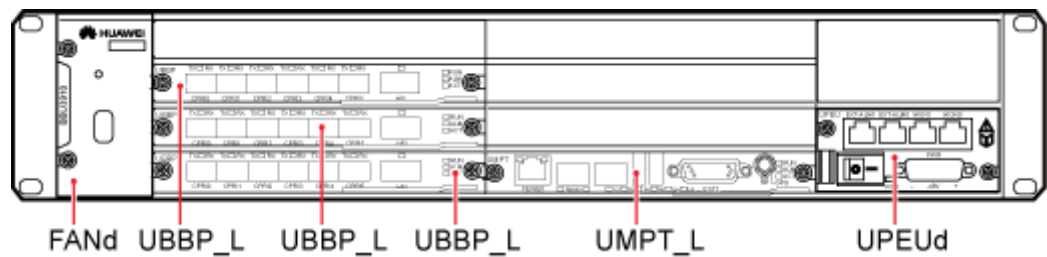

## 1.4.2 Board Configuration for a BBU3910 Working in Separate-MPT Scenarios


### Typical Configurations of a Single BBU

The following figures show the typical board configurations for a single BBU.

**NOTE**


GU: indicates the BBU shared by GSM and UMTS. Other RAT combinations are the same.

**Figure 1-23** Typical board configuration for a BBU3910 working in GU (with an eGBTS)

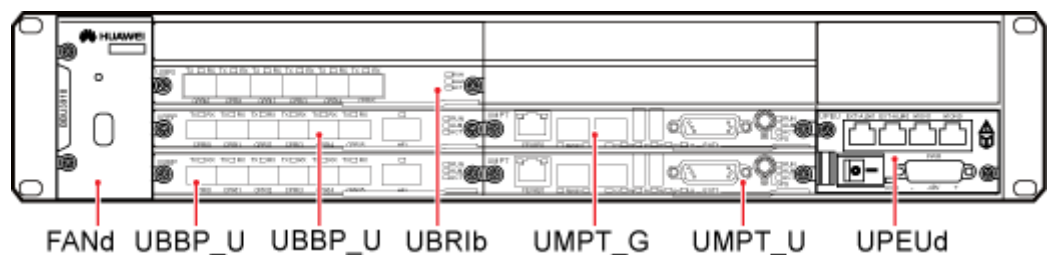





**Figure 1-24** Typical board configuration for a BBU3910 working in GU (with a GBTS)

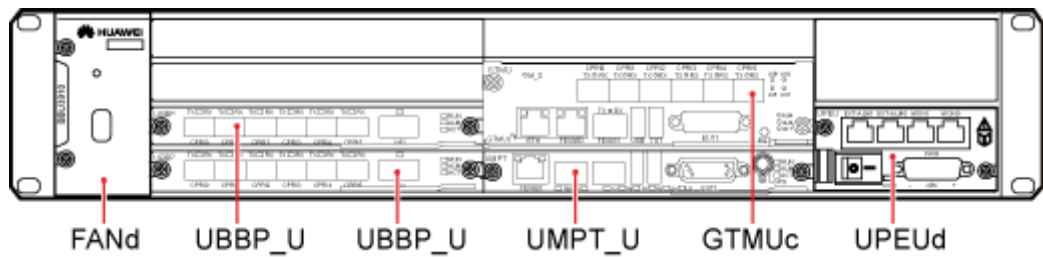


**Figure 1-25** Typical board configuration for a BBU3910 working in GL (with an eGBTS)

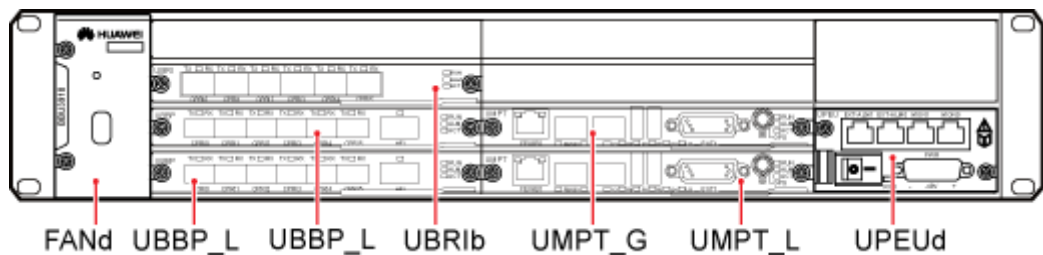

**Figure 1-26** Typical board configuration for a BBU3910 working in GL (with a GBTS)

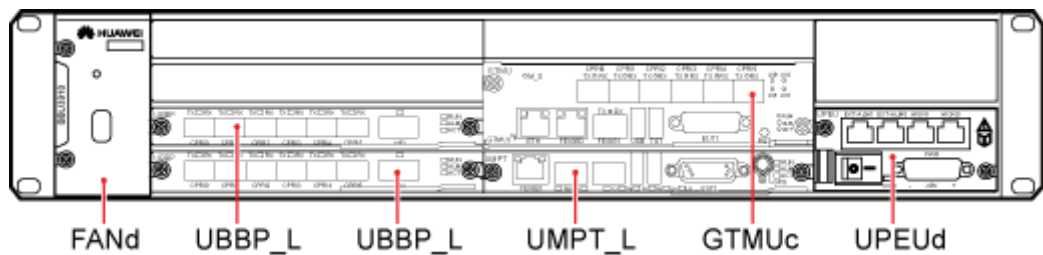

**Figure 1-27** Typical board configuration for a BBU3910 working in UL

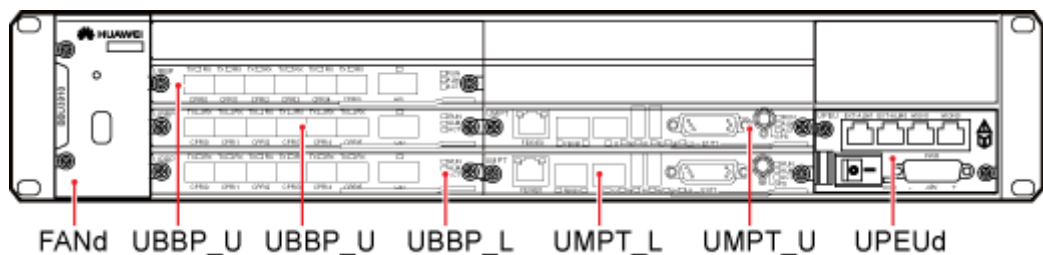


## Typical Configurations of Two Interconnected BBUs

The following figures show the typical board configuration principles for two interconnected BBUs.


**NOTE**

- Two BBU3910s can be interconnected only through UMPT+UMPT.
- A BBU3900 and a BBU3910 can be interconnected through UCIU+UMPT or UMPT+UMPT.
- When a BBU3900 and a BBU3910 are interconnected, the root BBU must be the BBU3900.
- BBU interconnection through UMPT+UMPT is available as of SRAN9.0. The UMPTs in the two BBUs are connected using a control and clock signal link to exchange control data, transmission data, and clock signals.


**Figure 1-28** Typical board configuration for a BBU3910 working in G&U+L (with an eGBTS)

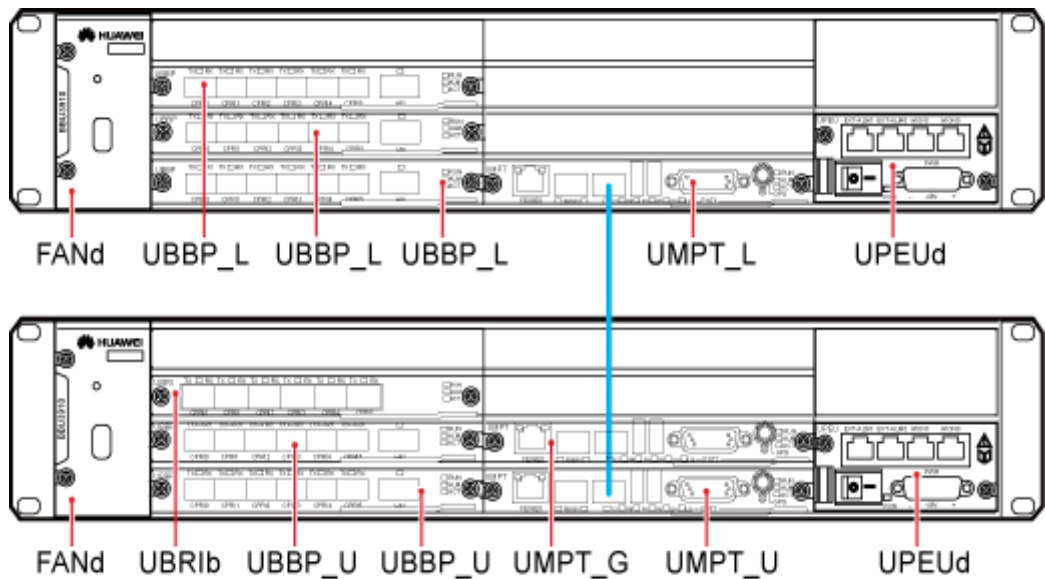


**Figure 1-29** Typical board configuration for a BBU3910 working in G&U+L (with a GBTS)

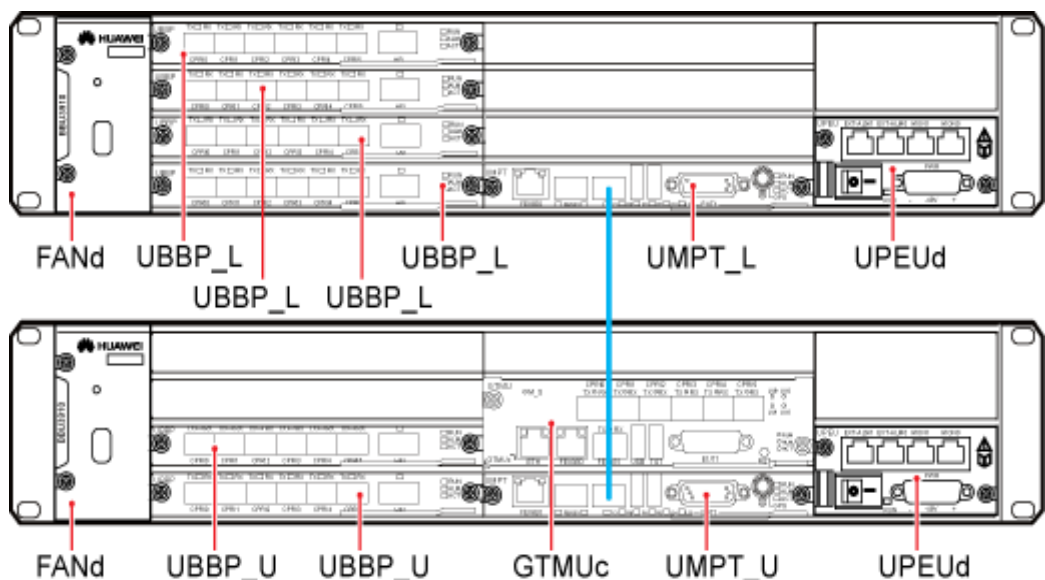

**Figure 1-30** Typical board configuration for a BBU3910 working in G&L+U (with an eGBTS)

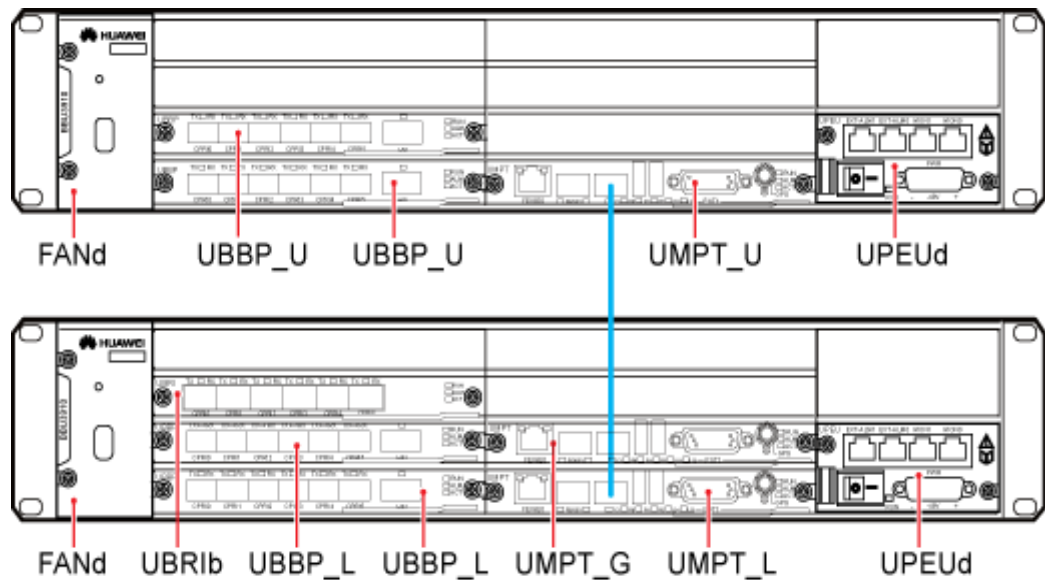

**Figure 1-31** Typical board configuration for a BBU3910 working in G&L+U (with a GBTS)

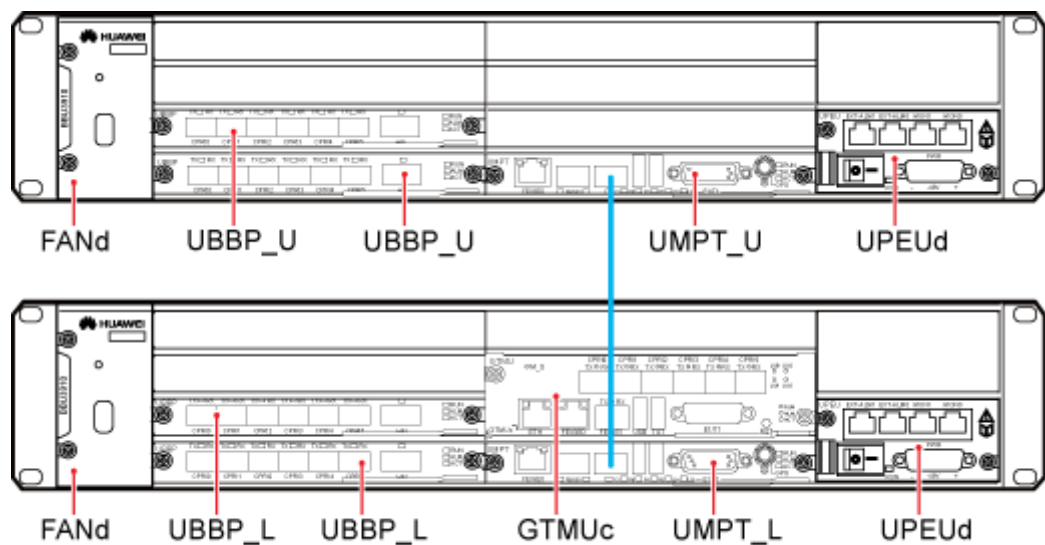

### 1.4.3 Board Configuration for a BBU3910 Working in Co-MPT Scenarios

In a co-MPT multi-RAT base station, different RATs share a main control board.


The following figures show the typical board configurations for a BBU3910 working in G\*U, G\*L, U\*L, and G\*U\*L.

**NOTE**


- G\*U: indicates that GSM and UMTS share a UMPT. This rule also applies to G\*L, U\*L, and G\*U\*L.

- UMPT-GU: indicates that a UMPT supports both GSM and UMTS. This rule also applies to UMPT-GL, UMPT-UL, and UMPT-GUL.


**Figure 1-32** Typical board configuration for a BBU3910 working in G\*U

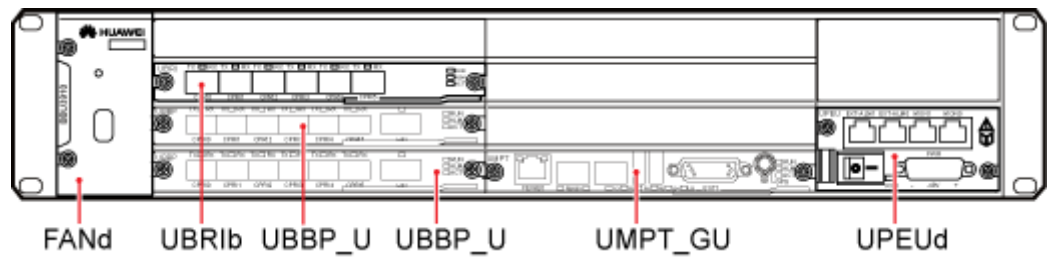


**Figure 1-33** Typical board configuration for a BBU3910 working in G\*L

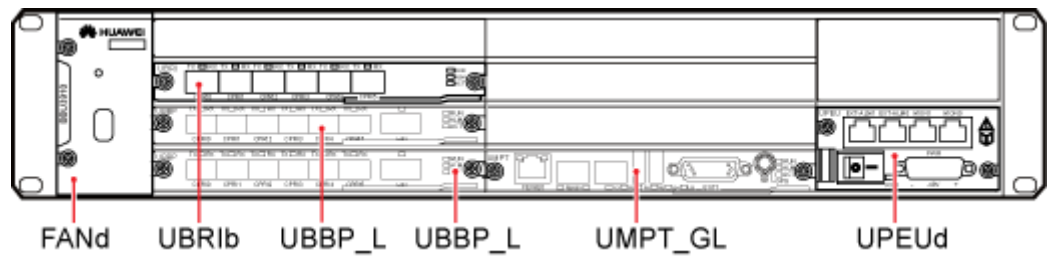

**Figure 1-34** Typical board configuration for a BBU3910 working in U\*L

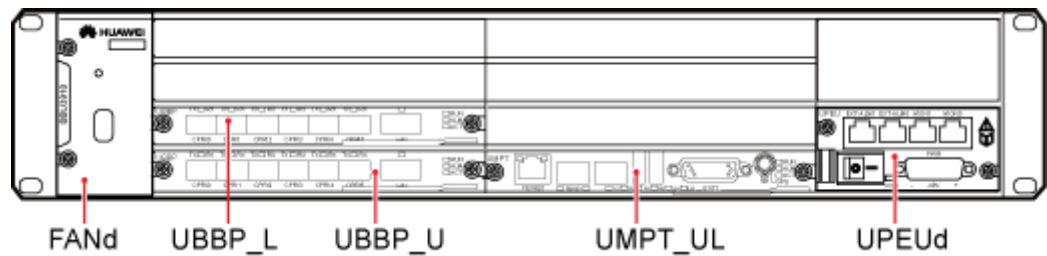

**Figure 1-35** Typical board configuration for a BBU3910 working in G\*U\*L

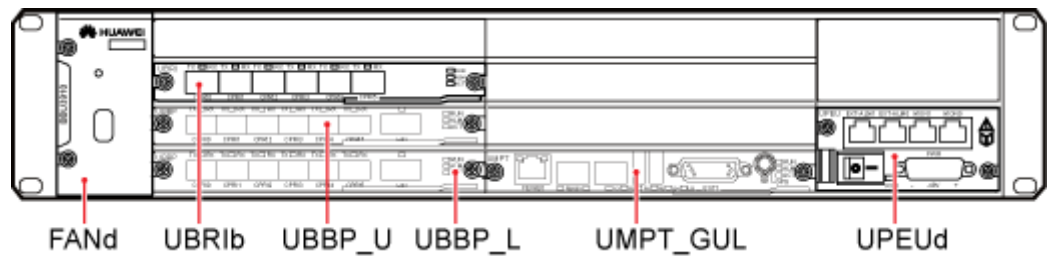

# 2 Technical Specifications

- 2.1 Baseband Specifications
- 2.2 Capacity Specifications
- 2.3 Signaling Specifications
- 2.4 CPRI Specifications
- 2.5 Transmission Port Specifications
- 2.6 Equipment Specifications
- 2.7 LTE Traffic Model

## 2.1 Baseband Specifications

### 2.1.1 GSM Baseband Specifications

Table 2-1 GSM baseband specifications

Board	GSM TRX
UBBPd1	24
UBBPd2	24
UBBPd3	24
UBBPd4	24
UBBPd5	36
UBBPd6	48

## 2.1.2 UMTS Baseband Specifications

**Table 2-2** UMTS baseband specifications (per UBBP board)

Board	Number of Cells	Number of Uplink CEs	Number of Downlink CEs	Number of HSDPA Codes	Number of HSDPA UEs	Number of HSUPA UEs
UBBPd1	6	384	512	6x15	288	288
UBBPd2	6	512	768	6x15	384	384
UBBPd3	6	384	512	6x15	288	288
UBBPd4	6	512	768	6x15	384	384
UBBPd5	6	768	768	6x15	512	512
UBBPd6	12	1024	1024	12x15	768	768
UBBPe1	6	384	512	6x15	288	288
UBBPe2	6	512	768	6x15	384	384
UBBPe3	12	768	768	12x15	512	512
UBBPe4	12	1024	1024	12x15	768	768

## 2.1.3 LTE Baseband Specifications

### 2.1.3.1 LTE FDD Baseband Specifications

**Table 2-3** Number of LTE FDD cells (per UBBP board)

Board	Number of Cells
UBBPd3	3x20 MHz 2T2R
UBBPd4	3x20 MHz 4T4R
UBBPd5	<ul style="list-style-type: none"> <li>• 6x20 MHz 2T2R</li> <li>• 3x20 MHz 4T4R</li> </ul>
UBBPd6	6x20 MHz 4T4R
UBBPe1	3x20 MHz 2T2R
UBBPe2	3x20 MHz 4T4R
UBBPe3	<ul style="list-style-type: none"> <li>• 6x20 MHz 2T2R</li> <li>• 3x20 MHz 4T4R</li> </ul>
UBBPe4	<ul style="list-style-type: none"> <li>• 6x20 MHz 4T4R</li> <li>• 3x20 MHz 8T8R</li> </ul>

 **NOTE**

- Any hybrid configurations of 1R and 2R cells are supported. In these configurations, the total number of cells cannot exceed the maximum number of 2R cells.
- As of SRAN11.1, the UBBPd4 supports hybrid configurations of 1R and 4R cells or 2R and 4R cells. In these configurations, a maximum of three cells are supported.
- As of SRAN9.0 (V100R009C00SPC210), the UBBPd5 supports hybrid configurations of 1R and 4R cells or 2R and 4R cells. In these configurations, a maximum of three cells are supported.
- As of SRAN9.0 (V100R009C00SPC210), the UBBPd6 supports hybrid configurations of 1R and 4R cells or 2R and 4R cells. In these configurations, a maximum of three 2R cells and a maximum of three 4R cells are supported. As of SRAN11.1, a total of six cells are supported in hybrid configurations.
- The UBBPe supports hybrid configurations of 1R and 4R cells or 2R and 4R cells. In these configurations, the total number of cells cannot exceed the maximum number of 4R cells.

**Table 2-4** Number of LTE FDD UEs (per cell)

Cell Bandwidth (MHz)	Maximum Number of UEs in RRC Connected Mode per Cell	Maximum Number of Uplink Synchronized UEs per Cell
1.4	168	168
3	360	360
5	600	600
10/15/20	1200	1200

**Table 2-5** Number of LTE FDD UEs (per MPT board)

Board	Maximum Number of UEs in RRC Connected Mode	Maximum Number of Uplink Synchronized UEs
UMPTb	10800	10800
UMPTe	14400	14400

**Table 2-6** Number of LTE FDD UEs (per UBBP board)

Board	Cell Bandwidth (MHz)	Maximum Number of UEs in RRC Connected Mode	Maximum Number of Uplink Synchronized UEs
UBBPd3/ UBBPd4	1.4	504	504
	3	1080	1080
	5	1800	1800
	10/15/20	3600	3600

Board	Cell Bandwidth (MHz)	Maximum Number of UEs in RRC Connected Mode	Maximum Number of Uplink Synchronized UEs
UBBPd5/ UBBPd6	1.4	1008	1008
	3	2160	2160
	5/10/15/20	3600	3600
UBBPe1/ UBBPe2	1.4	504	504
	3	1080	1080
	5	1800	1800
	10/15/20	3600	3600
UBBPe3/ UBBPe4	1.4	1008	1008
	3	2160	2160
	5/10/15/20	3600	3600

**Table 2-7** LTE FDD throughput (per cell)

Cell Bandwidth (MHz)	Maximum Downlink Throughput per Cell (2x2 MIMO, 64QAM) (Mbit/s)	Maximum Uplink Throughput per Cell (2x2 MU-MIMO, 64QAM) (Mbit/s)	Maximum Uplink Throughput per Cell (1x4 SIMO, 64QAM) (Mbit/s)	Maximum Uplink Throughput per Cell (2x4 MU-MIMO, 64QAM) (Mbit/s)
1.4	8.7	8.784	4.392	8.784
3	22	22.128	11.064	22.128
5	36	36.672	18.336	36.672
10	73	73.392	36.696	73.392
15	110	110.112	55.056	110.112
20	150	150.752	75.376	150.752

**Table 2-8** LTE FDD throughput (per UE)

Cell Bandwidth (MHz)	Maximum Downlink Throughput per UE (2x2 MIMO, 64QAM) (Mbit/s)	Maximum Uplink Throughput per UE (1x2 SIMO/1x4 SIMO, 64QAM) (Mbit/s)
1.4	8.7	4.392



Cell Bandwidth (MHz)	Maximum Downlink Throughput per UE (2x2 MIMO, 64QAM) (Mbit/s)	Maximum Uplink Throughput per UE (1x2 SIMO/1x4 SIMO, 64QAM) (Mbit/s)
3	22	11.064
5	36	18.336
10	73	36.696
15	110	55.056
20	150	75.376

**Table 2-9** LTE FDD throughput (per UBBP board)

Board	Maximum Throughput (Mbit/s)
UBBPd3	DL: 450; UL: 225
UBBPd4	DL: 600; UL: 225
UBBPd5	DL: 600; UL: 300
UBBPd6	<ul style="list-style-type: none"> <li>• eRAN8.1 DL: 900; UL: 450</li> <li>• eRAN11.0 and later versions DL: 1200; UL: 600</li> </ul>
UBBPe1	DL: 450; UL: 225
UBBPe2	DL: 600; UL: 300
UBBPe3	DL: 600; UL: 300
UBBPe4	DL: 1200; UL: 600

### 2.1.3.2 LTE NB-IoT Baseband Specifications

The following table describes cell specifications of a UBBP working in LTE NB-IoT mode.

**Table 2-10** Maximum number of LTE NB-IoT cells per UBBP board

Board	Number of Cells
UBBPd3	6x200 kHz 2T2R
UBBPd3 <sup>(3)</sup>	3x400 kHz 2T2R
UBBPd4	6x200 kHz 4T4R
UBBPd4 <sup>(4)</sup>	3x400 kHz 4T4R
UBBPd5	<ul style="list-style-type: none"> <li>• 9x200 kHz 2T2R/2T4R</li> </ul>

Board	Number of Cells
	<ul style="list-style-type: none"> <li>6x200 kHz 4T4R</li> </ul>
UBBPd5 <sup>(4)</sup>	3x400 kHz 4T4R
UBBPd5 <sup>(4)</sup>	3x200 kHz+3x400 kHz 2T2R
UBBPd6	9x200 kHz 4T4R
UBBPd6 <sup>(5)</sup>	3x200 kHz+3x400 kHz 4T4R
UBBPe1	6x200 kHz 2T2R
UBBPe1	6x400 kHz 2T2R
UBBPe2	6x200 kHz 4T4R
UBBPe2	6x400 kHz 4T4R
UBBPe3	<ul style="list-style-type: none"> <li>9x200 kHz 2T2R/2T4R</li> <li>6x200 kHz 4T4R</li> </ul>
UBBPe3 <sup>(6)</sup>	6x400 kHz 4T4R
UBBPe4	9x200 kHz 4T4R
UBBPe4 <sup>(7)</sup>	6x400 kHz 4T4R

 **NOTE**

- Any hybrid configurations of 1R and 2R cells are supported. In these configurations, the total number of cells cannot exceed the maximum number of 2R cells.
- Hybrid configurations of 1R and 4R cells or 2R and 4R cells are supported. In these configurations, the total number of cells cannot exceed the maximum number of 4R cells.
- <sup>(3)</sup>: If a 400 kHz cell has been set up, the total number of cells cannot exceed three. If more than three 200 kHz cells have been set up, no 400 kHz cell can be set up.
- <sup>(4)</sup>:
- For 4T4R cells: If a 400 kHz 4T4R cell has been set up, the total number of 4T4R cells cannot exceed three. If more than three 200 kHz 4T4R cells have been set up, no 400 kHz cell can be set up.
- For 2T4R cells: If more than six 2T4R cells have been set up, no 4T4R cell can be set up. If a 400 kHz 2T4R cell has been set up, the total number of cells cannot exceed six and the total number of 400 kHz cells cannot exceed three. If more than six 200 kHz 2T4R cells have been set up, no 400 kHz cell can be set up.
- <sup>(5)</sup>: If a 400 kHz cell has been set up, the total number of cells cannot exceed six and the total number of 400 kHz cells cannot exceed three. If more than six 200 kHz cells have been set up, no 400 kHz cell can be set up.
- <sup>(6)</sup>: If a 400 kHz cell or a 4T4R cell has been set up, the total number of cells cannot exceed six. If more than six 2T4R cells have been set up, neither 400 kHz cells nor 4T4R cells can be set up.
- <sup>(7)</sup>: If a 400 kHz cell has been set up, the total number of cells cannot exceed six. If more than six 200 kHz cells have been set up, no 400 kHz cell can be set up.

The following table lists the maximum number of UEs supported by an LTE NB-IoT cell.

**Table 2-11** Number of LTE NB-IoT UEs per cell

Board	Maximum Number of UEs in RRC Connected Mode per Cell	Maximum Number of UEs per Cell
UBBPd	600	50000 (cell bandwidth: 200 kHz)
	600 1200 <sup>(9)</sup>	80000 (cell bandwidth: 400 kHz)
UBBPe	600	50000 (cell bandwidth: 200 kHz)
	600 1200 <sup>(9)</sup>	80000 (cell bandwidth: 400 kHz)

 **NOTE**

<sup>(9)</sup>: When Enhanced Multi-Carrier(NB-IoT) is supported, a single 400 kHz NB-IoT cell supports a maximum of 1200 UEs in RRC connected mode.

The following table lists the maximum number of UEs supported by a main control board working in LTE NB-IoT.

**Table 2-12** Number of LTE NB-IoT UEs per main control board

Board	Maximum Number of UEs in RRC Connected Mode	Maximum Number of UEs
UMPTb	10800	1150000
UMPTe	14400	5200000

The following table lists the maximum number of UEs supported by a baseband processing board working in LTE NB-IoT.

**Table 2-13** Number of LTE NB-IoT UEs per baseband processing board

Board	Maximum Number of UEs in RRC Connected Mode	Maximum Number of UEs
UBBPd3/UBBPd4	3600 (6x200 kHz 2T2R) 1800 (3x400 kHz 2T2R)	865000
UBBPd4	3600	865000
UBBPd5/UBBPd6	3600	1270000
UBBPe1/UBBPe2	3600	865000
UBBPe3/UBBPe4	3600	1385000

The following table lists the maximum number of LTE NB-IoT UEs based on the typical board combination.

**Table 2-14** Number of LTE NB-IoT UEs based on the typical board combination

Board Combination	Maximum Number of UEs in RRC Connected Mode	Maximum Number of UEs
1 UMPTb+3 UBBD5	10800	3810000



**NOTE**

Specifications in the preceding tables are provided based on the assumption that the cell bandwidth is 200 kHz.

The following table provides the uplink and downlink LTE NB-IoT throughput per baseband processing board.

**Table 2-15** LTE NB-IoT throughput per baseband processing board

Board	Maximum Downlink Throughput per Baseband Processing Board (Mbit/s)	Maximum Uplink Throughput per Baseband Processing Board (Mbit/s)
UBBD3/UBBD4	0.636 (6x200 kHz) 0.666 (3x400 kHz)	1.2
UBBD5	0.954 (9x200 kHz 2T2R) 0.666 (3x300kHz 4T4R)	1.8 (9x200 kHz 2T2R) 1.2 (3x400 kHz 4T4R)
UBBD6	0.954	1.8
UBBPe1	0.636 (200 kHz) 1.332 (400 kHz)	1.2 (200 kHz) 2.4 (400 kHz)
UBBPe2	0.636 (200 kHz) 1.332 (400 kHz)	1.2
UBBPe3/UBBPe4	0.954 (9x200 kHz) 1.332 (6x400 kHz)	1.8 (200 kHz) 2.4 (400 kHz)

### 2.1.3.3 LTE FDD+NB-IoT Baseband Specifications

**Table 2-16** Number of LTE FDD or NB-IoT cells

Board	Maximum Number of LTE FDD Cells	Maximum Number of LTE NB-IoT Cells
UBBD3	3x10 MHz 2T2R	3x200 kHz 2T2R

Board	Maximum Number of LTE FDD Cells	Maximum Number of LTE NB-IoT Cells
UBBPd4	3x10 MHz 4T4R	3x200 kHz 4T4R
UBBPd5	3x20 MHz 2T2R+3x10 MHz 2T2R	3x200 kHz 2T2R
	3x10 MHz 4T4R	3x200 kHz 4T4R
UBBPd5	3x20 MHz 2T2R	3x400 kHz 2T2R
UBBPd6	3x20 MHz 4T4R+3x10 MHz 4T4R	3x200 kHz 4T4R
UBBPd6	3x20 MHz 4T4R	3x400 kHz 4T4R
UBBPe1	3x20 MHz 2T2R	3x200 kHz 2T2R
UBBPe1	3x20 MHz 2T2R	3x400 kHz 2T2R
UBBPe2	3x20 MHz 4T4R	3x200 kHz 4T4R
UBBPe2	3x20 MHz 4T4R	3x400 kHz 4T4R
UBBPe3	6x20 MHz 2T2R/2T4R	3x200 kHz 2T2R/2T4R
	3x20 MHz 4T4R	3x200 kHz 4T4R
UBBPe3	6x20 MHz 2T2R	3x400 kHz 2T2R
	3x20 MHz 4T4R	3x400 kHz 4T4R
UBBPe4	6x20 MHz 4T4R	3x200 kHz 4T4R
UBBPe4	6x20 MHz 4T4R	3x400 kHz 4T4R



**NOTE**

- Any hybrid configurations of 1R and 2R cells are supported. In these configurations, the total number of cells cannot exceed the maximum number of 2R cells.
- Hybrid configurations of 1R and 4R cells or 2R and 4R cells are supported. In these configurations, the total number of cells cannot exceed the maximum number of 4R cells.
- If a UBBPd is configured with LTE NB-IoT cells, the maximum board throughput will decrease and the proportion of the maximum throughput to the total LTE cell bandwidth will decrease.
- If a UBBPe/UBBPd is configured, one LTE FDD cell can be associated with one in-band LTE NB-IoT cell. (If a UBBPd is configured and **Standard Ratio** is set to **FDD\_ENHANCE**, the LTE FDD cells cannot be associated with in-band LTE NB-IoT cells.)

**Table 2-17** Number of LTE FDD+NB-IoT UEs (per cell)

Maximum Number of UEs in RRC Connected Mode per Cell	Maximum Number of UEs per Cell
600	50000 (cell bandwidth: 200 kHz) 80000 (cell bandwidth: 400 kHz)

**Table 2-18** Number of LTE FDD+NB-IoT UEs (per main control board)

Board	Maximum Number of LTE NB-IoT UEs in RRC Connected Mode	Maximum Number of LTE FDD+NB-IoT UEs
UMPTb	10800	7500+345000
UMPTe	14400	11500+1040000

**Table 2-19** Number of LTE FDD+NB-IoT UEs (per UBBP board)

Board	Maximum Number of LTE NB-IoT UEs in RRC Connected Mode	Maximum Number of LTE FDD+NB-IoT UEs
UBBPd3/UB BPd4	1800	2500+250000
UBBPd5/UB BPd6	1800	2500+380000
UBBPe1/UB BPe2	1800	2500+250000
UBBPe3/UB BPe4	1800	2500+410000



**NOTE**

The maximum number of UEs supported by a board is affected by the traffic model. The maximum number of UEs in the preceding tables is provided based on the LTE NB-IoT traffic model. For details about the LTE NB-IoT traffic model, see [2.7 LTE Traffic Model](#).

**Table 2-20** LTE FDD+NB-IoT throughput (per UBBP board)

Board	Maximum Throughput (Mbit/s)
UBBPd3	DL: 225; UL: 150
UBBPd4	DL: 300; UL: 150
UBBPd5	DL: 450; UL: 225
UBBPd6	DL: 900; UL: 450
UBBPe1	DL: 450; UL: 225
UBBPe2	DL: 600; UL: 300
UBBPe3	DL: 600; UL: 300
UBBPe4	DL: 1200; UL: 600

### 2.1.3.4 LTE TDD+NB-IoT Baseband Specifications

**Table 2-21** Maximum number of LTE TDD or NB-IoT cells

Board	Maximum Number of LTE TDD Cells	Maximum Number of LTE NB-IoT Cells
UBBPe4	6x20 MHz 4T4R	3x400 kHz 4T4R



**NOTE**

The preceding specifications are supported only when uplink-downlink subframe configuration 1 or 2 is used for TDD.

**Table 2-22** Number of LTE TDD+NB-IoT UEs (per cell)

Maximum Number of UEs in RRC Connected Mode per Cell	Maximum Number of UEs per Cell
600	50000

**Table 2-23** Number of LTE TDD+NB-IoT UEs

Board	Maximum Number of LTE NB-IoT UEs in RRC Connected Mode	Maximum Number of LTE TDD+NB-IoT UEs
UBBPe4	1800	2500+410000

**Table 2-24** LTE TDD+NB-IoT throughput

Board	Maximum Throughput (Mbit/s)
UBBPe4	DL: 1200 x downlink subframe ratio UL: <ul style="list-style-type: none"> <li>• 450 x uplink subframe ratio (subframe configuration 1)</li> <li>• 600 x uplink subframe ratio (subframe configuration 2)</li> </ul>

## 2.1.4 Co-BBP Baseband Specifications

**Table 2-25** GU co-BBP baseband specifications

Board	Number of GSM TRXs	Number of UMTS Cells	Number of UMTS Uplink CEs	Number of UMTS Downlink CEs	Number of UMTS HSDPA Codes	Number of UMTS HSDPA UEs	Number of UMTS HSUPA UEs
UBBPd1	12	6	192	256	6x15	144	144
UBBPd2	12	6	256	384	6x15	192	192
UBBPd3	12	6	192	256	6x15	144	144
UBBPd4	12	6	256	384	6x15	192	192
UBBPd5	18	6	384	512	6x15	288	288
UBBPd6	24	6	512	768	6x15	384	384

 **NOTE**

As of SRAN11.1, in GL, UL, and GUL co-BBP scenarios, the UBBP board supports hybrid configurations of 1R and 4R cells or hybrid configurations of 2R and 4R cells working in LTE.

**Table 2-26** GL co-BBP baseband specifications

Board	Number of GSM TRXs	Number of LTE FDD Cells	Maximum Number of LTE FDD UEs in RRC Connected Mode	Maximum LTE FDD Throughput (Mbit/s)
UBBPd3	12	3x10 MHz 2T2R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth: 1800</li> <li>10 MHz bandwidth: 3600</li> </ul>	<ul style="list-style-type: none"> <li>DL: 225</li> <li>UL: 112.5</li> </ul>
UBBPd4	12	3x10 MHz 2T2R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth: 1800</li> <li>10 MHz bandwidth: 3600</li> </ul>	<ul style="list-style-type: none"> <li>DL: 220</li> <li>UL: 112.5</li> </ul>
UBBPd5	18	3x20 MHz 4T4R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth: 1800</li> <li>10/15/20 MHz</li> </ul>	<ul style="list-style-type: none"> <li>DL: 600</li> <li>UL: 225</li> </ul>



Board	Number of GSM TRXs	Number of LTE FDD Cells	Maximum Number of LTE FDD UEs in RRC Connected Mode	Maximum LTE FDD Throughput (Mbit/s)
			bandwidth: 3600	
UBBPd6	24	3x20 MHz 4T4R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth: 1800</li> <li>10/15/20 MHz bandwidth: 3600</li> </ul>	<ul style="list-style-type: none"> <li>DL: 600</li> <li>UL: 225</li> </ul>

Table 2-27 UL co-BBP baseband specifications

Board	Number of UM TS Cells	Number of UM TS Uplink CEs	Number of UM TS Downlink CEs	Number of UM TS HS DP A Codes	Number of UM TS HS DP A UEs	Number of UM TS HS DP A UEs	Number of LTE FDD Cells	Maximum Number of LTE FDD UEs in RRC Connected Mode	Maximum LTE FDD Throughput (Mbit/s)
UBBPd6	6	512	768	6x15	384	384	3x20 MHz 4T4R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth: 1800</li> <li>10/15/20 MHz bandwidth: 3600</li> </ul>	DL: 600 UL: 225
UBBP e3	6	384	512	6x15	288	288	3x20 MHz 2T2R	<ul style="list-style-type: none"> <li>1.4 MHz bandwidth: 504</li> <li>3 MHz bandwidth: 1080</li> </ul>	DL: 450 UL: 225
UBBP e4	6	512	768	6x15	384	384	3x20 MHz 4T4R	<ul style="list-style-type: none"> <li>3 MHz bandwidth: 1080</li> <li>5 MHz bandwidth:</li> </ul>	DL: 600 UL: 225

Board	Number of UM TS Cells	Number of UM TS Uplink CEs	Number of UM TS Downlink CEs	Number of UM TS HS DP A Codes	Number of UM TS HS DP A UEs	Number of UM TS HS DP A UEs	Number of LTE FDD Cells	Maximum Number of LTE FDD UEs in RRC Connected Mode	Maximum LTE FDD Throughput (Mbit/s)
								1800 • 10/15/20 MHz bandwidth: 3600	

**Table 2-28** UM co-BBP baseband specifications

Board	Number of UM TS Cells	Number of UM TS Uplink CEs	Number of UM TS Downlink CEs	Number of UM TS HS DP A Codes	Number of UM TS HS DP A UEs	Number of UM TS HS DP A UEs	Maximum Number of LTE NB-IoT Cells	Maximum Number of LTE NB-IoT UEs	Maximum LTE NB-IoT Signaling Specifications	Maximum Number of LTE NB-IoT UEs in RRC Connected Mode	Maximum LTE NB-IoT Throughput (Mbit/s)
UBB Pd6	6	512	768	6x15	384	384	3x200 kHz 4T4R	520000	243000	1800	DL: 0.318 UL: 0.6
UBB Pe3	6	384	512	6x15	288	288	3x200 kHz 2T2R In	635000	297000	1800	DL: 0.318 UL: 0.6

Board	Number of UMTS Cells	Number of UMTS Uplink CEs	Number of UMTS Downlink CEs	Number of UMTS HS DP A Codes	Number of UMTS HS DP A UEs	Number of UMTS HS UP A UEs	Maximum Number of LTE NB-IoT Cells	Maximum Number of LTE NB-IoT UEs	Maximum LTE NB-IoT Signaling Specifications	Maximum Number of LTE NB-IoT UEs in RR C Connected Mode	Maximum LTE NB-IoT Throughput (Mbit/s)
							SRA N13.1 and later versions: 3x400 kHz 2T4R				
UBBPe4	6	512	768	6x15	384	384	3x200 kHz 4T4R In SRA N13.1 and later versions: 3x400 kHz 4T4R	635000	297000	1800	DL: 0.318 UL: 0.6

In SRAN13.1 and later versions, the following boards support ULM co-BBP and their co-BBP specifications are described in the following table.

**Table 2-29** ULM co-BBP specifications (UBBPd6/UBBPe3/UBBPe4)

Board	UBBPd6	UBBPe3	UBBPe4
<b>Number of UMTS Cells</b>	6 (2T2R/2T4R)	<ul style="list-style-type: none"> <li>• 6 (2T2R)</li> <li>• 3 (2T4R)</li> </ul>	6 (2T2R/2T4R)
<b>Number of UMTS Uplink CEs</b>	512	384	512
<b>Number of UMTS Downlink CEs</b>	768	512	768
<b>Number of UMTS HSDPA Codes</b>	6x15	6x15	6x15
<b>Number of UMTS HSDPA UEs</b>	384	288	384
<b>Number of UMTS HSUPA UEs</b>	384	288	384
<b>Number of LTE FDD Cells</b>	3x10 MHz 4T4R	3x10 MHz 2T2R	3x10 MHz 4T4R
<b>Maximum Number of LTE FDD UEs in RRC Connected Mode</b>	<ul style="list-style-type: none"> <li>• 1.4 MHz bandwidth: 504</li> <li>• 3 MHz bandwidth: 1080</li> <li>• 5 MHz bandwidth: 1800</li> <li>• 10 MHz bandwidth: 2520</li> </ul>	<ul style="list-style-type: none"> <li>• 1.4 MHz bandwidth: 504</li> <li>• 3 MHz bandwidth: 1080</li> <li>• 5 MHz bandwidth: 1800</li> <li>• 10 MHz bandwidth: 2520</li> </ul>	<ul style="list-style-type: none"> <li>• 1.4 MHz bandwidth: 504</li> <li>• 3 MHz bandwidth: 1080</li> <li>• 5 MHz bandwidth: 1800</li> <li>• 10 MHz bandwidth: 2520</li> </ul>
<b>Maximum LTE FDD Throughput (Mbit/s)</b>	DL: 300 UL: 112.5	DL: 225 UL: 112.5	DL: 300 UL: 112.5
<b>Maximum Number of LTE NB-IoT Cells</b>	3x200 kHz 4T4R	3x200 kHz 2T2R	3x200 kHz 4T4R
<b>Maximum Number of LTE NB-IoT UEs</b>	635000	635000	635000
<b>Maximum LTE NB-IoT Signaling Specifications</b>	297000	297000	297000
<b>Maximum</b>	1800 which can be	1800 which can be	1800 which can be

<b>Number of LTE NB-IoT UEs in RRC Connected Mode</b>	shared with LTE FDD; ≤ 3600 in total	shared with LTE FDD; ≤ 3600 in total	shared with LTE FDD; ≤ 3600 in total
<b>Maximum LTE NB-IoT Throughput (Mbit/s)</b>	DL: 0.318 UL: 0.6	DL: 0.318 UL: 0.6	DL: 0.318 UL: 0.6

**Table 2-30** GUL co-BBP baseband specifications

<b>Board</b>		UBBPd6
<b>GSM</b>	Number of GSM TRXs	12
<b>UMTS</b>	Number of Cells	6
	Number of Uplink CEs	256
	Number of Downlink CEs	384
	Number of HSDPA Codes	6x15
	Number of HSDPA UEs	192
	Number of HSUPA UEs	192
<b>LTE</b>	Number of Cells	3x20 MHz 4T4R
	Maximum Number of UEs in RRC Connected Mode	<ul style="list-style-type: none"> <li>• 1.4 MHz bandwidth: 504</li> <li>• 3 MHz bandwidth: 1080</li> <li>• 5 MHz bandwidth: 1800</li> <li>• 10/15/20 MHz bandwidth: 3600</li> </ul>
	Maximum Throughput (Mbit/s)	DL: 600; UL: 225

## 2.2 Capacity Specifications

### 2.2.1 GSM Capacity Specifications

**Table 2-31** Capacity specifications of a BBU working in GSM

<b>Specifications</b>	<b>Board Configuration</b>
In GBSS16.0, GBSS17.1, GBSS18.1, and later versions: A single site supports a maximum of 32 cells	1 GTMU <sub>b</sub> /GTMU <sub>c</sub> +1 UBR <sub>Ib</sub> (optional)

Specifications	Board Configuration
<p>and each cell supports a maximum of 24 TRXs.</p> <ul style="list-style-type: none"> <li>TDM transmission: 48 TRXs</li> <li>IP over FE transmission: 60 TRXs</li> <li>IP over E1 transmission: 48 TRXs</li> </ul>	
<p>In GBSS16.0, GBSS17.1, GBSS18.1, and later versions: A single site supports a maximum of 12 cells and each cell supports a maximum of 24 TRXs.</p> <ul style="list-style-type: none"> <li>IP over FE transmission: 72 TRXs</li> <li>IP over E1 transmission: 48 TRXs</li> </ul>	<p>1 UMPTb+2 UBR1b In GBSS18.1 and later versions: 1 GTMUc+1 UBR1b</p>
<p>In GBSS17.1, GBSS18.1, and later versions: A single site supports a maximum of 24 TRXs and a maximum of 12 cells. A single cell supports a maximum of 24 TRXs.</p>	<p>eGBTS: 1 GTMUb+1 UBR1b (optional)</p>

## 2.2.2 UMTS Capacity Specifications

**Table 2-32** Capacity specifications of a BBU working in UMTS

Specifications	Board Configuration
<p>In RAN16.0, RAN17.1, RAN18.1, and later versions: 48 cells (uplink: 6144 CEs; downlink: 6144 CEs)</p>	<p>1 UMPT+6 UBBPd6</p>

## 2.2.3 LTE Capacity Specifications

### 2.2.3.1 LTE FDD Capacity Specifications

**Table 2-33** Capacity specifications of a BBU working in LTE FDD

Item	Specifications
Maximum number of cells	<ul style="list-style-type: none"> <li>One UMPTb: <b>In eRAN7.0:</b> 36 cells (2T2R/2T4R, 20 MHz) or 18 cells (4T4R, 20 MHz) <b>In eRAN8.1, eRAN11.1, and later versions:</b></li> </ul>

Item	Specifications
	<p>36 cells (2T2R/2T4R/4T4R, 20 MHz)</p> <ul style="list-style-type: none"> <li>One UMPTe:</li> </ul> <p>72 cells (2T2R/2T4R/4T4R, 20 MHz)</p>
Maximum throughput	<ul style="list-style-type: none"> <li>UMPTb1/UMPTb2: <b>In eRAN7.0, eRAN8.1, and eRAN11.1 and later versions:</b> One UMPTb1/UMPTb2 board: The sum of uplink and downlink data rates at the MAC layer is 1.5 Gbit/s. <b>In eRAN8.1, eRAN11.1, and later versions:</b> Two UMPTb1/UMPTb2 boards: The sum of uplink and downlink data rates at the MAC layer is 3 Gbit/s.</li> <li>UMPTb3/UMPTb9: One UMPTb3/UMPTb9 board: The sum of uplink and downlink data rates at the MAC layer is 2 Gbit/s. Two UMPTb3/UMPTb9 boards: The sum of uplink and downlink data rates at the MAC layer is 4 Gbit/s.</li> <li>One UMPTe: The sum of uplink and downlink data rates at the MAC layer is 10 Gbit/s.</li> </ul>
Maximum number of UEs in RRC connected mode	<ul style="list-style-type: none"> <li>One UMPTb: 10800</li> <li>UMPTe: One UMPTe board: 14400 Two UMPTe boards: 28800</li> </ul>
Maximum number of data radio bearers (DRBs) per LTE FDD eNodeB	<ul style="list-style-type: none"> <li>One UMPTb: 32400</li> <li>One UMPTe: 43200</li> </ul>

### 2.2.3.2 LTE NB-IoT Capacity Specifications

**Table 2-34** Capacity specifications of a BBU working in LTE NB-IoT

Item	Specifications
Maximum number of cells	<ul style="list-style-type: none"> <li>One UMPTb: 36 cells (2T2R/2T4R/4T4R, 200 kHz)</li> <li>One UMPTe: 72 cells (2T2R/2T4R/4T4R, 200 kHz)</li> </ul>
Maximum throughput	<ul style="list-style-type: none"> <li>One UMPTb:</li> </ul>

Item	Specifications
	<p>The uplink data rate at the MAC layer is 7.2 Mbit/s. The downlink data rate at the MAC layer is 3.8 Mbit/s.</p> <ul style="list-style-type: none"> <li>One UMPTe: The uplink data rate at the MAC layer is 14.4 Mbit/s. The downlink data rate at the MAC layer is 7.6 Mbit/s.</li> </ul>
Maximum number of UEs in RRC connected mode	<ul style="list-style-type: none"> <li>One UMPTb: 10800</li> <li>One UMPTe: 14400</li> </ul>

### 2.2.3.3 LTE FDD+NB-IoT Capacity Specifications

**Table 2-35** Capacity specifications of a BBU working in LTE FDD+NB-IoT

Item	Specifications
Maximum number of cells	<ul style="list-style-type: none"> <li>One UMPTb: 36 cells (2T2R/2T4R/4T4R, 20 MHz/200 kHz)</li> <li>One UMPTe: 72 cells (2T2R/2T4R/4T4R, 20 MHz/200 kHz)</li> </ul>
Maximum throughput	<ul style="list-style-type: none"> <li>UMPTb1/UMPTb2: The sum of uplink and downlink data rates at the MAC layer is 1.5 Gbit/s.</li> <li>UMPTb3/UMPTb9: The sum of uplink and downlink data rates at the MAC layer is 2 Gbit/s.</li> <li>One UMPTe: The sum of uplink and downlink data rates at the MAC layer is 10 Gbit/s.</li> </ul>
Maximum number of UEs in RRC connected mode	<ul style="list-style-type: none"> <li>One UMPTb: 10800</li> <li>One UMPTe: 14400</li> </ul>



**NOTE**

After NB-IoT is available, LTE capacity specifications of the main control board are affected. LTE FDD and NB-IoT share the maximum number of LTE cells and UEs on the main control board.

### 2.2.3.4 LTE FDD+TDD Capacity Specifications

**Table 2-36** Capacity specifications of a BBU working in LTE FDD+TDD

Item	Specifications
Maximum number of cells	<ul style="list-style-type: none"> <li>One UMPTb: 36 cells</li> </ul>



Item	Specifications
	<ul style="list-style-type: none"> <li>• One UMPTe: 72 cells</li> </ul>
Maximum throughput	<ul style="list-style-type: none"> <li>• UMPTb1/UMPTb2: <ul style="list-style-type: none"> <li>– One UMPTb1/UMPTb2 board: The sum of uplink and downlink data rates at the MAC layer is 1.5 Gbit/s.</li> <li>– Two UMPTb1/UMPTb2 boards: The sum of uplink and downlink data rates at the MAC layer is 3 Gbit/s.</li> </ul> </li> <li>• UMPTb3/UMPTb9: <ul style="list-style-type: none"> <li>– One UMPTb3/UMPTb9 board: The sum of uplink and downlink data rates at the MAC layer is 2 Gbit/s.</li> <li>– Two UMPTb3/UMPTb9 boards: The sum of uplink and downlink data rates at the MAC layer is 4 Gbit/s.</li> </ul> </li> <li>• When configured with a UMPTe: <p>The sum of uplink and downlink data rates at the MAC layer is 10 Gbit/s.</p> </li> </ul>
Maximum number of UEs in RRC connected mode	<ul style="list-style-type: none"> <li>• One UMPTb: 10800</li> <li>• UMPTe: <ul style="list-style-type: none"> <li>One UMPTe board: 14400</li> <li>Two UMPTe boards: 28800</li> </ul> </li> </ul>
Maximum number of DRBs for a single eNodeB	<ul style="list-style-type: none"> <li>• One UMPTb: 32400</li> <li>• One UMPTe: 43200</li> </ul>

 **NOTE**

- LTE FDD and TDD dynamically share the specifications of the main control board.
- LTE FDD cells support 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, or 20 MHz bandwidth.
- For details of bandwidths supported by LTE TDD cells, see *DBS3900 LTE TDD Product Description*.

## 2.2.4 Multi-RAT Capacity Specifications

 **NOTE**

As listed in Table 2-37, Table 2-38, and Table 2-39:

- <sup>(1)</sup>: If GSM is configured with 72 TRXs (G24/24/24), each TRX can be configured with one Standalone Dedicated Control Channel (SDCCH) only. If GSM is configured with 24 TRXs (G8/8/8), each TRX can be configured with three SDCCHs.
- <sup>(2)</sup>: If the GTMUb serves as the main control board of eGBTS, the GSM capacity specification is S8/8/8.
- The capacity specifications of a UL base station are the same as those of a GUL base station.
- LTE FDD and LTE TDD dynamically share the specifications of the main control board.

- In typical GL, UL, or GUL scenarios where the specifications of GSM and UMTS remain unchanged, LTE capacity specifications of the main control board are affected after LTE NB-IoT is available. LTE FDD and NB-IoT share the maximum number of original LTE FDD cells and UEs in RRC connected mode on the main control board.

**Table 2-37** Capacity specifications of a BBU working in GU

Specifications	Board Configuration
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(2)</sup> +UMTS 3x16 (UL: 5120 CEs; DL: 5120 CEs)	<ul style="list-style-type: none"> <li>• 1 GTMUb+1 UMPT+5 UBBPd6</li> <li>• 1 GTMUc+1 UMPT+5 UBBPd6</li> </ul>
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(1)</sup> +UMTS 3x12 (UL: 5120 CEs; DL: 5120 CEs)	1 UMPTb+5 UBBPd6

**Table 2-38** Capacity specifications of a BBU working in GL

Specifications	Board Configuration
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(2)</sup> +LTE 30 cells (2T2R, 20 MHz bandwidth, sum of uplink and downlink data rates at the MAC layer per eNodeB: 1500 Mbit/s)	<ul style="list-style-type: none"> <li>• 1 GTMUb+1 UMPTb+5 UBBPd6</li> <li>• 1 GTMUc+1 UMPTb+5 UBBPd6</li> </ul>
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(1)</sup> +LTE 36 cells (2T2R, 10/15/20 MHz bandwidth, 7200 UEs in RRC connected mode, sum of uplink and downlink data rates at the MAC layer per eNodeB: 1500 Mbit/s)	1 UMPTb+6 UBBPd6
GSM G24/24/24 <sup>(2)</sup> +LTE 60 cells (2T2R, 20 MHz bandwidth, sum of uplink and downlink data rates at the MAC layer per eNodeB: 10 Gbit/s)	
GSM G24/24/24 <sup>(1)</sup> +LTE 72 cells (2T2R, 10/15/20 MHz bandwidth, 14400 UEs in RRC connected mode, sum of uplink and downlink data rates at the MAC layer per eNodeB: 10 Gbit/s)	

**Table 2-39** Capacity specifications of a BBU working in GUL

Specifications	Board Configuration

Specifications	Board Configuration
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(1)</sup> +UMTS 18 cells+LTE 18 cells (2T2R, 10/15/20 MHz bandwidth, 7200 UEs in RRC connected mode)	1 UMPTb+3 UBBPd5_U+3 UBBPd5_L
In SRAN9.0, SRAN10.1, SRAN11.1, and later versions: GSM G24/24/24 <sup>(2)</sup> +UMTS 36 cells+LTE 12 cells (2T2R, 10/15/20 MHz bandwidth, 7200 UEs in RRC connected mode)	<ul style="list-style-type: none"> <li>• 1 GTMUb+1 UMPTb_UL+3 UBBPd6_U+2 UBBPd5_L</li> <li>• 1 GTMUc+1 UMPTb_UL+3 UBBPd6_U+2 UBBPd5_L</li> </ul>

## 2.3 Signaling Specifications

### 2.3.1 LTE Signaling Specifications

Busy hour call attempt (BHCA) is the number of calls attempted at the busiest hour of a day. Signaling procedures required for completing a call may include the following: call setup, call release (including CSFB if it occurs), handover, tracking area update (TAU), DRB setup and release, and transition from the uplink-synchronized state to the uplink-asynchronized state. BHCA indicates the signaling processing capabilities of a system.

A busy-hour call initiated on different operators' networks involves different types and numbers of signaling procedures, and therefore consumes different amount of eNodeB resources. As a result, the BHCA capability varies with the traffic model.

#### 2.3.1.1 LTE FDD Signaling Specifications

The following table lists the signaling specifications of main control boards and baseband processing boards working in LTE FDD based on the definition of one BHCA in Table 2-66.

**Table 2-40** Signaling specifications of main control boards and baseband processing boards

Board	Specifications (BHCA)
UMPTb	<ul style="list-style-type: none"> <li>• eRAN7.0: 270000</li> <li>• eRAN8.1 and later versions: 360000</li> </ul>
UMPTe	eRAN11.1 and later versions: 1620000
UBBPd3/UBBPd4	eRAN7.0: 252000 eRAN8.1 and later versions: 270000
UBBPd5/UBBPd6	<ul style="list-style-type: none"> <li>• eRAN7.0: 324000</li> <li>• eRAN8.1 and later versions: 396000</li> </ul>

Board	Specifications (BHCA)
UBBPe1/UBBPe2	eRAN11.1 and later versions: 270000
UBBPe3/UBBPe4	eRAN11.1 and later versions: 432000

In eRAN7.0, the signaling specifications of an eNodeB cannot exceed 480000 BHCAs.

In eRAN8.1, the signaling specifications of an eNodeB cannot exceed 1440000 BHCAs.

In eRAN11.1 and later versions, the signaling specifications of an eNodeB cannot exceed 3240000 BHCAs.

The following table lists the signaling specifications of an eNodeB based on typical board configuration and the definition of one BHCA in Table 2-66

**Table 2-41** LTE FDD eNodeB signaling specifications based on the typical board configuration

Board Combination	Specifications (BHCA)
1 UMPTb+1 UBBD6	<ul style="list-style-type: none"> <li>eRAN7.0: 324000</li> <li>eRAN8.1 and later versions: 396000</li> </ul>
1 UMPTb+2 UBBD5	eRAN8.1 and later versions: 792000
1 UMPTb+4 UBBD5	eRAN8.1 and later versions: 1440000

### 2.3.1.2 LTE NB-IoT Signaling Specifications

**Table 2-42** Signaling specifications of main control boards and baseband processing boards

Board	Specifications (BHCA)
UMPTb	540000
UMPTe	2430000
UBBD3/UBBD4	405000
UBBD5/UBBD6	594000
UBBPe1/UBBPe2	405000
UBBPe3/UBBPe4	648000

The following table lists the signaling specifications supported by an NB-IoT eNodeB based on typical board combinations.

**Table 2-43** Signaling specifications supported by an NB-IoT eNodeB

Board Combination	Specifications (BHCA)
-------------------	-----------------------

Board Combination	Specifications (BHCA)
1 UMPTb+2 UBBPd5	1188000
1 UMPTb+4 UBBPd5	2160000



**NOTE**

The signaling specifications of an eNodeB cannot exceed 4860000 BHCA.

### 2.3.1.3 LTE FDD+NB-IoT Signaling Specifications

The following table lists the signaling specifications of main control boards and baseband processing boards working in LTE FDD+NB-IoT.

**Table 2-44** Signaling specifications of main control boards and baseband processing boards

Board	Specifications (BHCA)
UMPTb	252000+161000
UMPTe	1296000+484000
UBBPd3/UBBPd4	189000+121000
UBBPd5/UBBPd6	277000+177000
UBBPe1/UBBPe2	189000+121000
UBBPe3/UBBPe4	302000+193000



**NOTE**

The signaling specifications of an eNodeB cannot exceed 4860000 BHCA.

### 2.3.1.4 LTE FDD+TDD Signaling Specifications

The following table lists the signaling specifications of main control boards working in LTE FDD+TDD.

**Table 2-45** Signaling specifications of main control boards

Board	Specifications (BHCA)
UMPTb	360K
UMPTe	1620K



**NOTE**

In eRAN11.1 and later versions, the signaling specifications of an eNodeB cannot exceed 3,240,000 BHCA.

## 2.3.2 Multi-RAT Signaling Specifications

The following tables list the signaling specifications of co-MPT GU, GL, UL, and GUL base stations.



### NOTE

- If GSM is configured with 72 TRXs (S24/24/24), each TRX can be configured with one SDCCH only; if GSM is configured with 24 TRXs (S8/8/8), each TRX can be configured with three SDCCHs.
- Common NodeB Application Protocol (CNBAP) indicates the signaling traffic of a NodeB over the Iub interface. The NBAP is defined in 3GPP specifications, and one CNBAP indicates one radio link (RL) establishment procedure.
- In a typical GL, UL, and GUL scenario where the signaling specifications of GSM and UMTS remain unchanged, LTE signaling specifications (BHCA) of the main control board are affected after LTE NB-IoT is available. LTE FDD and NB-IoT share LTE signaling processing specifications of the main control board. For commercial networks, it is recommended that 30% of the LTE signaling processing specifications be allocated to LTE NB-IoT.

**Table 2-46** Signaling specifications using a UMPT\_GU board

Product Version	Typical Specifications	Recommended Board Configuration
SRAN9.0/ SRAN10.1/ SRAN11.1 and later versions	24 TRXs+1000 CNBAPS	1 UMPTb1+5 UBBPd1 SRAN11.1 and later versions 1 UMPTe+5 UBBPd1
	48 TRXs+500 CNBAPS	1 UMPTb1+2 UBBPd1+1 UBRIb SRAN11.1 and later versions 1 UMPTe+2 UBBPd1+1 UBRIb

**Table 2-47** Signaling specifications using a UMPT\_GL board

Product Version	Typical Specifications	Recommended Board Configuration
SRAN9.0	48 TRXs+90000 BHCAs	1 UMPTb1+1 UBBPd3+1 UBRIb
	48 TRXs+180000 BHCAs	1 UMPTb1+2 UBBPd3
SRAN10.1/ SRAN11.1 and later versions	48 TRXs+414000 BHCAs	1 UMPTb1+2 UBBPd3
	48 TRXs+270000 BHCAs	1 UMPTb1+2 UBBPd3+1 UBRIb
SRAN11.1 and later versions	24 TRXs+1350000 BHCAs	1 UMPTe+6 UBBPe4

**Table 2-48** Signaling specifications using a UMPT\_UL board

Product Version	Typical Specifications	Recommended Board Configuration
-----------------	------------------------	---------------------------------

Product Version	Typical Specifications	Recommended Board Configuration
SRAN9.0	350 CNBAPS+90000 BHCAs	1 UMPTb1+1 UBBPd2_U+1 UBBPd3_L
	350 CNBAPS+180000 BHCAs	1 UMPTb1+1 UBBPd2_U+2 UBBPd3_L
SRAN10.1/ SRAN11.1 and later versions	350 CNBAPS+270000 BHCAs	1 UMPTb1+1 UBBPd2_U+1 UBBPd3_L
	350 CNBAPS+504000 BHCAs	1 UMPTb1+1 UBBPd2_U+2 UBBPd3_L
SRAN11.1 and later versions:	600 CNBAPS+1206000 BHCAs	1 UMPTe+2 UBBPd6_U+4 UBBPe4_L

**Table 2-49** Signaling specifications using a UMPT\_GUL board

Product Version	Typical Specifications	Recommended Board Configuration
SRAN9.0	18 TRXs+500 CNBAPS+90000 BHCAs	1 UMPTb1+2 UBBPd2_U+1 UBBPd3_L
	24 TRXs+800 CNBAPS+90000 BHCAs	1 UMPTb1+4 UBBPd1_U+1 UBBPd3_L
SRAN10.1, SRAN11.1, and later versions	18 TRXs+500 CNBAPS+270000 BHCAs	1 UMPTb1+2 UBBPd2_U+1 UBBPd3_L
	24 TRXs+800 CNBAPS+234000 BHCAs	1 UMPTb1+4 UBBPd1_U+1 UBBPd3_L
SRAN11.1 and later versions	24 TRXs+600 CNBAPS+900000 BHCAs	1 UMPTe+2 UBBPd6_U+4 UBBPe4_L

## 2.4 CPRI Specifications

### Maximum Distance Between the BBU and RRUs

**Table 2-50** Maximum distance between the BBU and RRUs (single-RAT)

RAT	Maximum Distance Between the BBU and RRUs
GSM	40 km
UMTS	40 km
LTE	The maximum distances from different LTE baseband processing boards are as

RAT	Maximum Distance Between the BBU and RRUs
	<p>follows:</p> <p><b>eRAN7.0 and eRAN8.1:</b></p> <ul style="list-style-type: none"> <li>• UBBPd3: 20 km</li> <li>• UBBPd4: 40 km</li> <li>• UBBPd5/UBBPd6: <ul style="list-style-type: none"> <li>- 40 km (cell quantity <math>\leq 3</math>)</li> <li>- 20 km (cell quantity <math>\geq 4</math>)</li> </ul> </li> </ul> <p><b>In eRAN11.1 and later versions:</b></p> <ul style="list-style-type: none"> <li>• UBBPd/UBBPe: 40 km</li> </ul>

**Table 2-51** Maximum distance between the BBU and RRUs (multi-RAT)

RAT	Maximum Distance Between the BBU and RRUs
GU	40 km
GL	<p>The maximum distances from different LTE baseband processing boards are as follows:</p> <p><b>In SARN9.0 and SRAN10.1:</b></p> <ul style="list-style-type: none"> <li>• UBBPd3: 20 km</li> <li>• UBBPd4: 40 km</li> <li>• UBBPd5/UBBPd6: <ul style="list-style-type: none"> <li>- 40 km (cell quantity <math>\leq 3</math>)</li> <li>- 20 km (cell quantity <math>\geq 4</math>)</li> </ul> </li> </ul> <p><b>In SRAN11.1 and later versions:</b></p> <ul style="list-style-type: none"> <li>• UBBPd/UBBPe: 40 km</li> </ul>
UL	
GUL	

## CPRI Ports

**Table 2-52** CPRI port specifications

Board	Number of CPRI Ports	CPRI Port Rate (Gbit/s)	Topology
GTMUb/GTMUc	6	1.25/2.5	Star, chain, and ring
UBRIb	6	1.25/2.5/4.9/6.144/9.8	Star, chain, and ring
UBBPd/UBBPe	6	1.25/2.5/4.9/6.144/9.8	Star, chain, and ring



## CPRI Bandwidth Access Capability

**Table 2-53** Mapping between the CPRI port rate and the number of cells in a UMTS scenario

CPRI Port Rate (Gbit/s)	Number of 1T2R/2T2R* Cells
1.25	4
2.5	8
4.9	16
6.144	24
9.8	32



**NOTE**

\* indicates that the number of supported cells is reduced by half if the 2T2R cell supports VAM and the two TX antennas are configured on two RF modules in two CPRI links for VAM.

**Table 2-54** Mapping between the CPRI port rate and the number of cells in an LTE FDD scenario

CPRI Port Rate (Gbit/s)	Number of 2T4R/4T4R Cells	Number of 1T2R/2T2R Cells
1.25	4x4 MIMO cells are not recommended because of the limited transmission bandwidth of the CPRI ports.	<ul style="list-style-type: none"> <li>• 4 (cell bandwidth <math>\leq</math> 3 MHz)</li> <li>• 2 (cell bandwidth <math>\leq</math> 5 MHz)</li> <li>• 1 (cell bandwidth <math>\leq</math> 10 MHz)</li> </ul>
2.5	1 (cell bandwidth $\leq$ 10 MHz)	<ul style="list-style-type: none"> <li>• 4 (cell bandwidth <math>\leq</math> 5 MHz)</li> <li>• 2 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 1 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>
4.9	<ul style="list-style-type: none"> <li>• 2 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 1 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>	<ul style="list-style-type: none"> <li>• 4 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 2 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>
6.144	<ul style="list-style-type: none"> <li>• 2 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 1 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>	<ul style="list-style-type: none"> <li>• 4 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 2 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>
9.8	<ul style="list-style-type: none"> <li>• 4 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 2 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>	<ul style="list-style-type: none"> <li>• 8 (cell bandwidth <math>\leq</math> 10 MHz)</li> <li>• 4 (cell bandwidth = 15 MHz or 20 MHz)</li> </ul>

**Table 2-55** Mapping between the CPRI port rate and the number of cells in an LTE NB-IoT scenario

CPRI Port Rate (Gbit/s)	Number of 2T4R/4T4R Cells	Number of 1T2R/2T2R Cells
1.25	2	4
2.5	4	8
4.9	8	16
9.8	16	32

## 2.5 Transmission Port Specifications

**Table 2-56** GSM Transmission port specifications

Board	Specifications
GUMUb	1 E1/T1 port (transmitting 4 E1s/T1s), 1 FE electrical port, and 1 FE optical port
GTMUc	1 E1/T1 port (transmitting 4 E1s/T1s), 1 FE/GE electrical port, and 1 FE/GE optical port
UMPTb1/UMPTb2	1 E1/T1 port (transmitting 4 E1s/T1s), 1 FE/GE electrical port, and 1 FE/GE optical port
UMPTb3/UMPTb9	1 FE/GE electrical port and 1 FE/GE optical port
UMPTe	2 FE/GE electrical ports and 2 XGE optical ports
UTR Pc	4 FE/GE electrical ports and 2 FE/GE optical ports <b>NOTE</b> As of SRAN13.0, when a GTMU/GTMUb/GTMUc is used as the main control board in a BBU, GSM cannot serve as the primary RAT of the UTR Pc in the same BBU.

**Table 2-57** UMTS transmission port specifications

Board	Specifications
UMPTb1/UMPTb2	1 E1/T1 port (transmitting 4 E1s/T1s), 1 FE/GE electrical port, and 1 FE/GE optical port
UMPTb3/UMPTb9	1 FE/GE electrical port and 1 FE/GE optical port

Board	Specifications
UMPTe	2 FE/GE electrical ports and 2 XGE optical ports
UTRPe	4 FE/GE electrical ports and 2 FE/GE optical ports
UTRPa	2 E1/T1 ports (transmitting 8 E1s/T1s)

**Table 2-58** LTE transmission port specifications

Board	Specifications
UMPTb1/UMPTb2	1 E1/T1 port (transmitting 4 E1s/T1s), 1 FE/GE electrical port, and 1 FE/GE optical port
UMPTb3/UMPTb9	1 FE/GE electrical port and 1 FE/GE optical port
UMPTe	2 FE/GE electrical ports and 2 XGE optical ports
UTRPe	4 FE/GE electrical ports and 2 FE/GE optical ports

 **NOTE**

This section describes only the transmission ports on a BBU working in a single RAT. The number of transmission ports on a BBU working in multiple RATs equals the sum of the transmission ports on the boards in each RAT.

## 2.6 Equipment Specifications

**Table 2-59** Input power

Item	Specifications
Input power	UPEUc: -48 V DC Voltage range: -38.4 V DC to -57 V DC UPEUd: -48 V DC Voltage range: -38.4 V DC to -57 V DC

**Table 2-60** Dimensions and weight

Item	Specifications
Dimensions (H x W x D)	86 mm × 442 mm × 310 mm
Weight	<b>In SRAN8.0, SRAN9.0 and SRAN10.1 versions:</b> <ul style="list-style-type: none"> <li>• BBU3910 in full configuration: ≤ 12 kg</li> </ul>

Item	Specifications
	<ul style="list-style-type: none"> <li>• BBU3910 in typical configuration: ≤ 7 kg</li> </ul> <p><b>In SRAN11.1 and later versions:</b></p> <ul style="list-style-type: none"> <li>• BBU3910 in full configuration: ≤ 15 kg</li> <li>• BBU3910 in typical configuration: ≤ 7 kg</li> </ul>

**Table 2-61** Heat dissipation

Configuration	Specifications
FANd	<p><b>In SRAN8.0, SRAN9.0 and SRAN10.1 versions:</b> 650 W</p> <p><b>In SRAN11.1 and later versions:</b> 1000 W</p>
FANe	<p><b>In SRAN8.0, SRAN9.0 and SRAN10.1 versions:</b> 650 W</p> <p><b>In SRAN11.1 and later versions:</b> 1000 W</p>

**Table 2-62** Environment

Item	Specifications
Operating temperature	<p>–20°C to +55°C (long term)</p> <p>+55°C to +60°C (short term)</p>
Relative humidity	5% RH to 95% RH
Protection class	IP20
Atmospheric pressure	70 kPa to 106 kPa
Noise power level	<p>ETS 300 753 3.1</p> <p>≤7.2 bels</p>
Storage time	The product must be installed and put into use within a year after being delivered; otherwise, it may malfunction.

## 2.7 LTE Traffic Model

### 2.7.1 LTE FDD Traffic Model

On live networks, the service capacity of an LTE FDD eNodeB depends on system processing capabilities and the traffic model. This section describes two traffic models.

- Traffic model 1 derives from a typical LTE network where smartphones account for a large proportion of all UEs accessing the network. UEs in this traffic model are characterized by short online duration, frequent network access and release, high mobility, and a large number of small-packet data services.
- Traffic model 2 derives from a typical LTE network where data cards account for a large proportion of all UEs accessing the network. LTE dongle and customer premises equipment (CPE) are examples of such data cards. UEs in this traffic model are characterized by long online duration, low mobility, and a large number of large-packet data services.

The traffic model of the control plane (CP) for models 1 and 2 is illustrated as follows:



**NOTE**

<sup>(1)</sup>: Traffic models described in the following table are obtained in busy hours. @BH refers to at busy hour.

**Table 2-63** CP specifications for traffic models 1 and 2

CP Signaling Process	Specifications for Traffic Model 1	Specifications for Traffic Model 2
PS Call Attempt Number per User @BH <sup>(1)</sup> (times) For example, PS Call Density	180	20
Dedicated Bearer Attempt Number per User @BH (times)	5	1
TAU & Attach & Detach per User @BH (times)	30	5
Intra-eNodeB Handover Number per User @BH (times)	10	1
Inter-eNodeB X2 Based Handover Out Attempt Number per User @BH (times)	40	2
Inter-eNodeB X2 Based Handover In Attempt Number per User @BH (times)	40	2
Inter-eNodeB S1 Based Handover Out Attempt Number per User @BH (times)	0	0
Inter-eNodeB S1 Based Handover In Attempt Number per User @BH (times)	0	0

CP Signaling Process	Specifications for Traffic Model 1	Specifications for Traffic Model 2
Inter-RAT Handover Attempt Number per User @BH (times)	3	0
Inter-RAT Redirection Attempt Number per User @BH (times)	12	0
CSFB Based Inter-RAT Handover Attempt Number per User @BH (times)	0	0
CSFB Based Inter-RAT Redirection Attempt Number per User @BH (times)	5	0
CA Scell Configuration Update Attempt Number per User @BH (times)	10	0
Syn2Unsyn Attempt Number per User @BH (times)	0	0
Unsyn2Syn Attempt Number per User @BH (times)	0	0
RRC Re-Establish Number per User @BH (times)	2	0
Paging number @BH (times)	1260000	100000

The following table describes the user plane (UP) specifications for traffic model 1.

**Table 2-64** UP specifications for traffic model 1

Service Type	PS Call Attempt Ratio (%)	DL Traffic Volume per PS Call (KB)	DL: UL Traffic Volume Ratio
Web browsing & E-mail	35.00	250	15
Video downloading, uploading & streaming	0.35	20000	50
SNS	15.00	200	4
IM	15.00	5	0.7
Music & APP downloading & Streaming	0.50	5000	30
File sharing &	0.10	400	0.1

Service Type	PS Call Attempt Ratio (%)	DL Traffic Volume per PS Call (KB)	DL: UL Traffic Volume Ratio
Storage			
Video Call	0.20	3000	1
Heart beat	25.00	0.1	1
Other	8.85	50	1

The following table describes the UP specifications for traffic model 2.

**Table 2-65** UP specifications for traffic model 2

Service Type	PS Call Attempt Ratio (%)	UL Traffic Volume per PS Call (KB)	DL Traffic Volume per PS Call (KB)
FTP	100	600	6000

Based on the definition of traffic model 1, one BHCA, for example, one combined PS call, is defined by taking every item in traffic model 1 divided by the PS call density. The details of one BHCA are listed below.

**Table 2-66** Definition of one BHCA

Definition of a Combined Call or One BHCA	Times
PS Call Attempts	1
Dedicated Bearer Attempts	0.0278
TAU & Attach & Detach Attempts	0.1667
Intra-eNodeB Handover Attempts	0.0556
Inter-eNodeB X2 Based Handover Out Attempts	0.2222
Inter-eNodeB X2 Based Handover In Attempts	0.2222
Inter-eNodeB S1 Based Handover Out Attempts	0
Inter-eNodeB S1 Based Handover In Attempts	0
Inter-RAT Handover Attempts	0.0167
Inter-RAT Redirection Attempts	0.0167
CSFB Based Inter-RAT Handover Attempts	0
CSFB Based Inter-RAT Redirection Attempts	0.0278
CA Scell Configuration Update Attempts	0.0556

Definition of a Combined Call or One BHCA	Times
Syn2Unsyn Attempts	0
Unsyn2Syn Attempts	0
RRC Re-Establish Attempts	0.0111

## 2.7.2 LTE NB-IoT Traffic Model

On live networks, the service capacity of an NB-IoT eNodeB depends on system processing capabilities and the traffic model. This section describes the LTE NB-IoT traffic models defined in the 3GPP TR 45.820 protocol.

**Table 2-67** Packet interval

Access Interval (Hour)	User Ratio
24	40%
2	40%
1	15%
0.5	5%

**Table 2-68** User distribution

Coverage Class	Ratio
0 (0 dB)	100%
1 (10 dB)	0%
2 (20 dB)	0%

Average packet length is 100 bytes.

**Table 2-69** CP traffic model specifications

CP Signaling Process	Traffic Model Specifications
PS Call Attempt Number per User @BH <sup>(1)</sup> (times)	0.467
Dedicated Bearer Attempt Number per User @BH (times)	0
TAU & Attach & Detach per User @BH (times)	0.00322 <sup>(2)</sup>
Intra-eNodeB Handover Number per User	0



CP Signaling Process	Traffic Model Specifications
@BH (times)	
Inter-eNodeB X2 Based Handover Out Attempt Number per User @BH (times)	0
Inter-eNodeB X2 Based Handover In Attempt Number per User @BH (times)	0
Inter-eNodeB S1 Based Handover Out Attempt Number per User @BH (times)	0
Inter-eNodeB S1 Based Handover In Attempt Number per User @BH (times)	0
Inter-RAT Handover Attempt Number per User @BH (times)	0
Inter-RAT Redirection Attempt Number per User @BH (times)	0
CSFB Based Inter-RAT Handover Attempt Number per User @BH (times)	0
CSFB Based Inter-RAT Redirection Attempt Number per User @BH (times)	0
CA Scell Configuration Update Attempt Number per User @BH (times)	0
Syn2Unsyn Attempt Number per User @BH (times)	0
Unsyn2Syn Attempt Number per User @BH (times)	0
RRC Re-Establish Number per User @BH (times)	0
Paging number @BH (times)	400



**NOTE**

- <sup>(1)</sup>: Traffic models described in the preceding table are obtained in busy hours. @BH refers to at busy hour.
- <sup>(2)</sup>: Periodic TAU timer is extended to 310 hours.

**Table 2-70** UP traffic model specifications

Service Type	PS Call Attempt Ratio (%)	UL Traffic Volume per PS Call (KB)	DL Traffic Volume per PS Call (KB)
Uplink data	100	0.1	0

# 3 Acronyms and Abbreviations

**Table 3-1** Acronyms and abbreviations

Acronym or Abbreviation	Full Name
ATM	Asynchronous Transfer Mode
BBU	Baseband Unit
BITS	Building Integrated Timing Supply System
CAPS	Call Attempt Per Second
CE	Channel Elements
CNBAPS	Common NodeB Application Parts
CPRI	Common Public Radio Interface
DL	Downlink
EDGE	Enhanced Data rates for GSM Evolution
FE	Fast Ethernet
GE	Gigabit Ethernet
GLONASS	Global Navigation Satellite System
GPS	Global Positioning System
GSM	Global Service Mobile
HDLC	High-level Data Link Control
HSDPA	High Speed Downlink Packet Access
IC	Interference Cancellation
IP	Internet Protocol
LMT	Local Maintenance Terminal
LTE	Long Term Evolution
MAC	Media Access Control

Acronym or Abbreviation	Full Name
MIMO	Multi-input and Multi-output
NB-IoT	Narrow Band-Internet of Things
OC-3	Optical Carrier Level 3
OM	Operation and Maintenance
OMC	Operation and Maintenance Center
RGPS	Remote Global Positioning System
SMT	Site Maintenance Terminal
STM-1	Synchronous Transport Mode-1
TOD	Time of Day
UBRI	Universal Baseband Radio Interference Board
UEIU	Universal Environment Interface Unit
UL	Uplink
UMTS	Universal Mobile Telecommunications System
UMPT	Universal Main Processing and Transmission Unit
UPEU	Universal Power and Environment Interface Unit
USCU	Universal Satellite card and Clock Unit
UTRP	Universal Transmission Processing Unit