

S2720-EI Series Enterprise Switches





The S2720-EI is a next-generation access switch that provides flexible 100M, GE access ports and GE uplink ports.




Introduction

Building on next-generation, high-performance hardware and the Huawei Versatile Routing Platform (VRP), the S2720-EI supports intelligent stack (iStack), flexible Ethernet networking, and diversified security control. It provides customers with a green, easy-to-manage, easy-to-expand, and cost-effective 100M to the desktop solution.

Product Overview

Models and Appearance

Model	Description
 S2720-12TP-EI	<ul style="list-style-type: none"> • 4 × Ethernet 10/100 Base-Tx ports, 4 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports • AC power supply • Forwarding performance: 12.6Mpps • Switching capacity: 68Gbps
 S2720-12TP-PWR-EI	<ul style="list-style-type: none"> • 4 × Ethernet 10/100 Base-Tx ports, 4 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports • AC power supply • PoE+ • Forwarding performance: 12.6Mpps • Switching capacity: 68Gbps
 S2720-28TP-PWR-EI-L	<ul style="list-style-type: none"> • 16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports • 8 × PoE+ ports • AC power supply • Forwarding performance: 20.4Mpps • Switching capacity: 68Gbps
 S2720-28TP-EI	<ul style="list-style-type: none"> • 16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports • AC power supply

Model	Description
	<ul style="list-style-type: none"> • Forwarding performance: 20.4Mpps • Switching capacity: 68Gbps
 S2720-28TP-PWR-EI	<ul style="list-style-type: none"> • 16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports • AC power supply • PoE+ • Forwarding performance: 20.4Mpps • Switching capacity: 68Gbps
 S2720-52TP-EI	<ul style="list-style-type: none"> • 32 × Ethernet 10/100 Base-Tx ports, 16 × Ethernet 10/100/1000 Base-T ports, 4 × Gig SFP ports • AC power supply • Forwarding performance: 34.8Mpps • Switching capacity: 336Gbps
 S2720-52TP-PWR-EI	<ul style="list-style-type: none"> • 32 × Ethernet 10/100 Base-Tx ports, 16 × Ethernet 10/100/1000 Base-T ports, 4 × Gig SFP ports • AC power supply • PoE+ • Forwarding performance: 34.8Mpps • Switching capacity: 336Gbps

Power Supply

PoE Power Supply Configuration

The S2720-EI series PoE switches, including S2720-12TP-PWR-EI, S2720-28TP-PWR-EI-L, S2720-28TP-PWR-EI, S2720-52TP-PWR-EI, have built-in PoE power modules.

The S2720-12TP-PWR-EI and S2720-28TP-PWR-EI-L has a built-in power module and does not support pluggable power modules. The built-in power module can provide 124 W PoE power, which ensures full PoE power on 8 ports in compliance in 802.3af or on 4 ports in compliance with 802.3at. The switch cannot connect to an RPS power supply.

The S2720-28TP-PWR-EI and S2720-52TP-PWR-EI has a built-in power module and does not support pluggable power modules. The built-in power module can provide 370 W PoE power, which ensures full PoE power on 24 ports in compliance in 802.3af or on 12 ports in compliance with 802.3at. The switch cannot connect to an RPS power supply.

Non-PoE Power Supply Configuration

The S2720-EI series non-PoE switches have a single internal power module and do not support pluggable power modules.

Product Features and Highlights

Flexible Ethernet Networking

- In addition to traditional Spanning Tree Protocol (STP), Rapid Spanning Tree Protocol (RSTP), and Multiple Spanning Tree Protocol (MSTP), the S2720-EI supports Huawei-developed Smart Ethernet Protection (SEP) technology and the latest Ethernet Ring Protection Switching (ERPS) standard. SEP is a ring protection protocol specific to the Ethernet link layer, and applies to various ring network topologies, such as open ring topology, closed ring topology, and cascading ring topology. This protocol is reliable, easy to maintain, and implements fast protection switching within 50 ms. ERPS is defined in ITU-T G.8032. It implements millisecond-level protection switching based on traditional Ethernet MAC and bridging functions.
- The S2720-EI supports Smart Link, which implements backup of uplinks. One S2720-EI switch can connect to multiple aggregation switches through multiple links, significantly improving reliability of access devices.

- The S2720-EI supports Ethernet OAM (IEEE 802.3ah/802.1ag) to fast-detect link faults.

Diversified security control

- The S2720-EI supports 802.1x authentication, MAC address authentication, and combined authentication on a per port basis and implements dynamic policy delivery (VLAN, QoS, and ACL) to users.
- The S2720-EI collects and maintains information about access users, such as IP addresses, MAC addresses, IP address leases, VLAN IDs, and interface numbers in a DHCP snooping binding table. In this way, IP addresses and access interfaces of DHCP users can be tracked. You can specify DHCP snooping trusted and untrusted ports to ensure that users connect only to the authorized DHCP server.
- The S2720-EI supports strict ARP learning. This feature prevents ARP spoofing attackers from exhausting ARP entries so that users can connect to the Internet normally.

Easy maintenance

- The S2720-EI can be managed and maintained using Simple Network Management Protocol (SNMP) V1, V2, and V3, Command Line Interface (CLI), web-based network management system, or Secure Shell (SSH) V2.0.
- The S2720-EI supports Super Virtual Fabric (SVF), which virtualizes the "Core/aggregation + Access switch + AP" structure into a logical device. The S2720-EI enables the simplest network management solution in the industry. It allows plug-and-play access switches and APs. In addition, the S2720-EI supports service configuration templates. The templates are configured on core devices and automatically delivered to access devices, enabling centralized control, simplified service configuration, and flexible configuration modification. The S2720-EI functions as a client in an SVF system
- The S2720-EI can use the GARP VLAN Registration Protocol (GVRP) to implement dynamic distribution, registration, and propagation of VLAN attributes. GVRP reduces manual configuration workload and ensures correct configuration. Additionally, the S2720-EI supports MUX VLAN, which involves a principal VLAN and multiple subordinate VLANs. Subordinate VLANs are classified into group VLANs and separate VLANs. Ports in the principal VLAN can communicate with ports in subordinate VLANs. Ports in a subordinate group VLAN can communicate with each other, whereas ports in a subordinate separate VLAN can communicate only with ports in the principal VLAN. The S2720-EI also supports VLAN Central Management Protocol (VCMP) and VLAN-Based Spanning Tree (VBST) protocol.

iStack

- The S2720-EI supports intelligent stack (iStack). This technology combines multiple switches into a logical switch. Member switches in a stack implement redundancy backup to improve device reliability and use inter-device link aggregation to improve link reliability. iStack provides high network scalability. You can increase ports, bandwidth, and processing capacity of a stack by simply adding member switches to the stack. iStack also simplifies device configuration and management. After a stack is set up, multiple physical switches are virtualized into one logical device. You can log in to any member switch in the stack to manage all the member switches in the stack.

Excellent network traffic analysis

- The S2720-EI supports the sFlow function. It uses a method defined in the sFlow standard to sample traffic passing through it and sends sampled traffic to the collector in real time. The collected traffic statistics are used to generate statistical reports, helping enterprises maintain their networks.

Product Specifications

Functions and Features

The following table lists the functions and features available on the S2720-EI.

Feature	Description
MAC address table	16K MAC address entries MAC address learning and aging Static, dynamic, and blackhole MAC address entries Interface-based MAC learning limiting

Feature	Description
VLAN	<p>4K active VLANs</p> <p>Guest VLAN and voice VLAN</p> <p>GVRP</p> <p>MUX VLAN</p> <p>VLAN assignment based on MAC addresses, protocols, IP subnets, policies, and interfaces</p> <p>1:1 and N:1 VLAN mapping</p>
Ethernet loop protection	<p>RRPP ring topology and RRPP multi-instance</p> <p>Smart Link tree topology and Smart Link multi-instance, providing millisecond-level protection switchover</p> <p>SEP</p> <p>ERPS (G.8032)</p> <p>STP (IEEE 802.1d), RSTP (IEEE 802.1w), and MSTP (IEEE 802.1s)</p>
Reliability	<p>EFM OAM (802.3ah)</p> <p>CFM OAM (802.1ag)</p> <p>ITU-Y.1731</p> <p>DLDP</p> <p>LACP</p>
IP routing	<p>Static route, RIP, RIPng, OSPF</p>
IPv6	<p>Neighbor Discovery (ND)</p> <p>Path MTU (PMTU)</p> <p>IPv6 ping, IPv6 tracert, and IPv6 Telnet</p>
Multicast	<p>IGMPv1/v2/v3 snooping</p> <p>Controllable multicast</p> <p>Interface-based multicast traffic statistics</p> <p>MLDv1/v2 snooping (Multicast Listener Discovery snooping)</p>
QoS/ACL	<p>Rate limiting by an interface</p> <p>Eight queues on each interface</p> <p>WRR, DRR, SP, WRR+SP, and DRR+SP queue scheduling algorithms</p> <p>Re-marking of the 802.1p priority and DSCP priority</p> <p>Rate limiting in each queue and traffic shaping on interfaces</p>
Security	<p>Port isolation, port security, and sticky MAC</p> <p>MFF</p> <p>Blackhole MAC address entries</p> <p>Limit on the number of learned MAC addresses</p> <p>IEEE 802.1x authentication and limit on the number of users on an interface</p> <p>AAA authentication, RADIUS authentication, HWTACACS authentication, and NAC</p> <p>SSH V2.0</p> <p>Hypertext Transfer Protocol Secure (HTTPS)</p> <p>CPU defense</p> <p>Blacklist and whitelist</p> <p>DHCP relay, DHCP server, DHCP snooping</p> <p>DHCPv6 relay, DHCPv6 server, DHCPv6 snooping</p>

Feature	Description
Super Virtual Fabric (SVF)	Working as an SVF client that is plug-and-play with zero configuration Automatically loading the system software package and patches of clients One-click and automatic delivery of service configurations Supports independent running client
Management and maintenance	iStack Virtual Cable Test (VCT) Remote configuration and maintenance using Telnet SNMPv1/v2c/v3 RMON eSight and web-based NMS HTTPS LLDP/LLDP-MED System logs and multi-level alarms 802.3az EEE
Interoperability	Supports VBST (Compatible with PVST/PVST+/RPVST)
	Supports LNP (Similar to DTP)
	Supports VCMP (Similar to VTP)

Hardware Specifications


The following table lists the S2720-EI hardware specifications.

Item	Specification
Memory (RAM)	512 MB
Flash memory	Hardware 512MB, customer available 240MB
Switching capacity	52-Port: 336 Gbps, others: 68 Gbps
Forwarding performance	<ul style="list-style-type: none"> S2720-12TP-EI: 12.6Mpps S2720-12TP-PWR-EI: 12.6Mpps S2720-28TP-PWR-EI-L: 20.4Mpps S2720-28TP-EI: 20.4Mpps S2720-28TP-PWR-EI: 20.4Mpps S2720-52TP-EI: 34.8Mpps S2720-52TP-PWR-EI: 34.8Mpps
Mean Time Between Failures (MTBF), years	<ul style="list-style-type: none"> S2720-12TP-EI: 23.8 S2720-12TP-PWR-EI: 23.8 S2720-28TP-PWR-EI-L: 42 S2720-28TP-EI: 49 S2720-28TP-PWR-EI: 40 S2720-52TP-EI: 31 S2720-52TP-PWR-EI: 38
Mean Time To Repair (MTTR), hours	2
Availability	> 0.99999

Item		Specification
Surge protection	Service port protection	Common mode: ± 7 kV
	Power supply port protection	<ul style="list-style-type: none"> DC: ± 1 kV in differential mode; ± 2 kV in common mode AC: ± 6 kV in differential mode; ± 6 kV in common mode
Dimensions (W x D x H)		<ul style="list-style-type: none"> S2720-12TP-EI: 250 mm * 180 mm * 43.6 mm S2720-12TP-PWR-EI: 320 mm * 220 mm * 43.6 mm S2720-28TP-PWR-EI: 442 mm * 310 mm * 43.6 mm S2720-28TP-EI/S2720-28TP-PWR-EI-L: 442 mm * 220 mm * 43.6 mm S2720-52TP-EI: 442 mm * 220 mm * 43.6 mm S2720-52TP-PWR-EI: 442 mm * 310 mm * 43.6 mm
Weight		<ul style="list-style-type: none"> S2720-12TP-EI: ≤ 2 kg S2720-12TP-PWR-EI/ S2720-52TP-EI/ S2720-28TP-EI /S2720-28TP-PWR-EI-L: ≤ 5 kg S2720-28TP-PWR-EI/ S2720-52TP-PWR-EI: ≤ 6 kg
AC input voltage	Rated voltage range	100V AC to 240V AC; 50/60 Hz
	Maximum voltage range	90V AC to 264V AC; 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)		<ul style="list-style-type: none"> S2720-12TP-EI: 12.85W S2720-12TP-PWR-EI: without PD: 15.61W; with PD: 160.5W (PoE: 123.2W) S2720-28TP-PWR-EI: without PD: 37.8W; with PD: 444.9W (PoE: 370W) S2720-28TP-EI: 20.1W S2720-28TP-PWR-EI-L: without PD: 24.8W; with PD: 167W (PoE: 123.2W) S2720-52TP-EI: 40.3W S2720-52TP-PWR-EI: without PD: 53.7W; with PD: 435W (PoE: 370W)
Temperature	Operating temperature	Operating temperature: <ul style="list-style-type: none"> 0m to 1,800m: 0°C to 45°C 1,800m to 5,000m (decreases 1°C for every 220m increase in altitude)
	Storage temperature	-40°C to +70°C
Noise under normal temperature (27°C, sound power)		<ul style="list-style-type: none"> S2720-12TP-EI: Noise-free (no fans) S2720-12TP-PWR-EI: Noise-free (no fans) S2720-28TP-PWR-EI-L: Noise-free (no fans) S2720-28TP-EI: Noise-free (no fans) S2720-28TP-PWR-EI: less than 48.6 dBA S2720-52TP-EI: less than 44.5 dBA S2720-52TP-PWR-EI: less than 48.3 dBA
Relative humidity		5%RH to 95%RH, noncondensing
Operating altitude		0 m to 5000 m

Networking and Applications

The S2720-EI provides 100M desktop access functions for a high performance network, such as voice VLAN, NAC and so on.

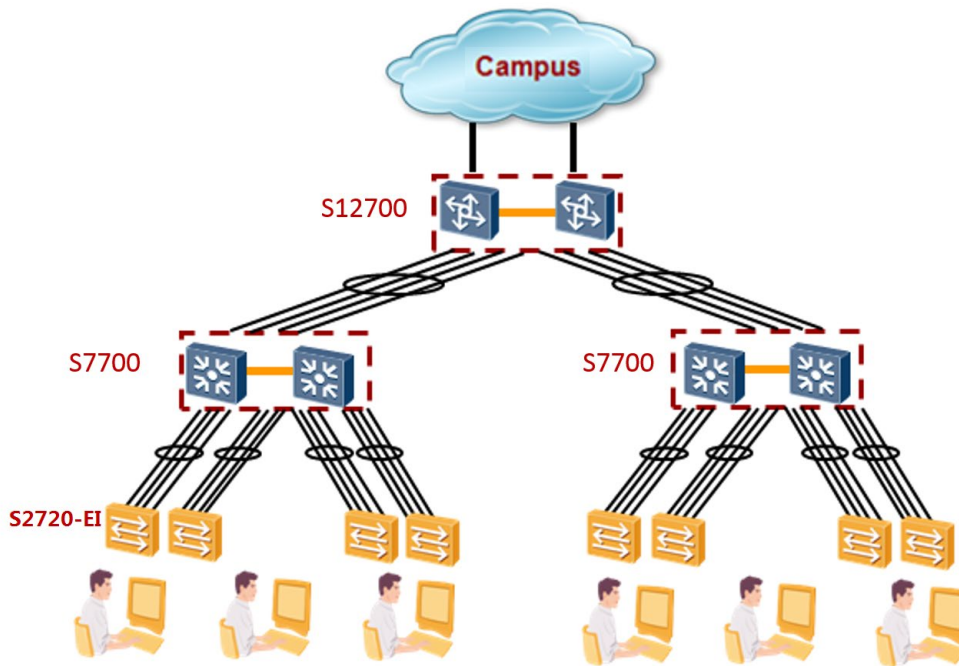

Ordering Information

Item	Product Description
1	S2720-12TP-EI (4 × Ethernet 10/100 Base-Tx ports, 4 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports, AC 110/220V)
2	S2720-12TP-PWR-EI (4 × Ethernet 10/100 Base-Tx ports, 4 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports, 124W PoE AC 110/220V)
3	S2720-28TP-PWR-EI (16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports, 370W PoE AC 110/220V)
4	S2720-28TP-PWR-EI-L (16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports, 8 ports PoE+, 124W PoE AC 110/220V)
5	S2720-28TP-EI (16 × Ethernet 10/100 Base-Tx ports, 8 × Ethernet 10/100/1000 Base-T ports, 2 × Gig SFP ports, 2 × combo Gig ports, AC 110/220V)
6	S2720-52TP-EI (32 × Ethernet 10/100 Base-Tx ports, 16 × Ethernet 10/100/1000 Base-T ports, 4 × Gig SFP ports, AC 110/220V)
7	S2720-52TP-PWR-EI (32 × Ethernet 10/100 Base-Tx ports, 16 × Ethernet 10/100/1000 Base-T ports, 4 × Gig SFP ports, 370W PoE AC 110/220V)

More Information


For more information about Huawei Campus Switches, visit <http://e.huawei.com> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise technical support website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2018. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

 HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address:Huawei Industrial Base Bantian,
Longgang Shenzhen 518129 People's
Republic of China

Website:e.huawei.com