

M2121-EFL-Sf(8–32mm)

1T 2MP Face Capture Bullet Camera



Features

- ▶ 1 TOPS computing power
- ▶ Supports heat map, 1 + N, behavior analysis, and face and body detection
- ▶ 1/1.8" CMOS sensor
- ▶ 120 dB super wide dynamic range (WDR), ensuring that both foreground and background objects are clearly identified in environments with sharp light contrast


Technical Specifications

Model M2121-EFL-Sf(8–32mm)		
Major Specifications		
Main control	CPU	Hi3516D V300
	Computing power	1 TOPS
	Memory	DDR3 1.0 GB
	Flash type	SPI NAND Flash 256.0 MB
	Max capacity	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Camera	Image sensor	1/1.8" 2-megapixel: 1920 (H) x 1080 (V)
	Focal length	8–32 mm
	Max f-number	F1.6 (W) to F1.65 (T)
	Angle of view	Horizontal: 13.44° (T) to 42.3° (W); vertical: 7.7° (T) to 23.34° (W)
	Illumination distance	20 m
Intelligence		
Face/Body	Face	Face detection, Facial attribute recognition
	Person	Person detection
Other intelligences	Scene change	Supported
	Defocus	Supported
	Heat map	Supported
	Behavior analysis	Loitering
Open ecosystem		
Data openness	Data openness	SDK (proprietary protocol), REST API (proprietary protocol), GA/T 1400, GB/T 28181
Image		
Codec	Video encoding format	MJPEG/H.264/H.265
	Video encoding channels	Triple streams
	Video frame rate	Linear: 60 fps, 50 fps, 30 fps, or 25 fps (default); physical WDR: 30 fps or 25 fps (default)
	Intelligent encoding	Extra265/264
Image ISP	Min illumination	Color: 0.001 lux (F1.2, AGC ON, 1/30s shutter speed); B/W: 0.0001 lux (F1.2, AGC ON, 1/30s shutter speed)
	Day/Night mode	Auto (ICR), color (default), or B/W In auto mode, the day/night switch sensitivity can be set to high (default), medium, or low.
	White balance	Auto/Auto tracking/Manual/OnePush
	Digital noise reduction	2D/3D noise reduction
	WDR	120 dB
	Highlight compensation	Supported


Networking		
Network support	1 + N	Supported
Network transmission	Protocols supported by IPv4	TCP, UDP, IPv4, IPv6, DHCP, DHCPv6, DNS, ICMP, ICMPv6, IGMP, HTTPS, FTP, SFTP, RTP, RTSP, RTCP, SIP, ARP, SSL, NTP, SNMP (V1/V2/V3), 802.1x, QoS, DDNS, SMTP, and PPPoE Note: 1. The DDNS uses the Oray (www.oray.com) scheme. 2. The northbound protocol needs to adapt to the PPPoE dialup scenario.
	Protocols supported by IPv6	HTTPS, RTP, RTCP, RTSP, SSH

Security		
Data security	Media security	Supports web- or SDK-based media stream encryption; supports a maximum of two channels of encrypted media streams; supports encrypted data storage on SD cards
Service security	User rights	Three user roles: administrator, advanced operator, and common operator
	Security mode	User name and password authentication, 802.1X authentication, and HTTPS digital certificate
	System intrusion detection	Supported

Port	
Storage port	MicroSD card slot that supports microSDHC/microSDXC; maximum memory card capacity: 256 GB
Network port	One RJ45 10/100 Mbit/s Ethernet port

General Specifications	
Power type	12 V DC and PoE (IEEE 802.3at)
Power consumption	Maximum: 15 W; typical: 3.8 W
Operating temperature	-30°C to +60°C (illuminator disabled) -30°C to +40°C (illuminator enabled)
Operating humidity	5% to 95% (non-condensing)
Surge protection	4 kV
IP rating	IP66
Weight	Net weight 0.94 kg;Gross weight 1.24 kg
Dimensions	Device dimensions 210 mm x 108 mm x 91 mm;Package dimensions 117 mm x 296 mm x 141 mm

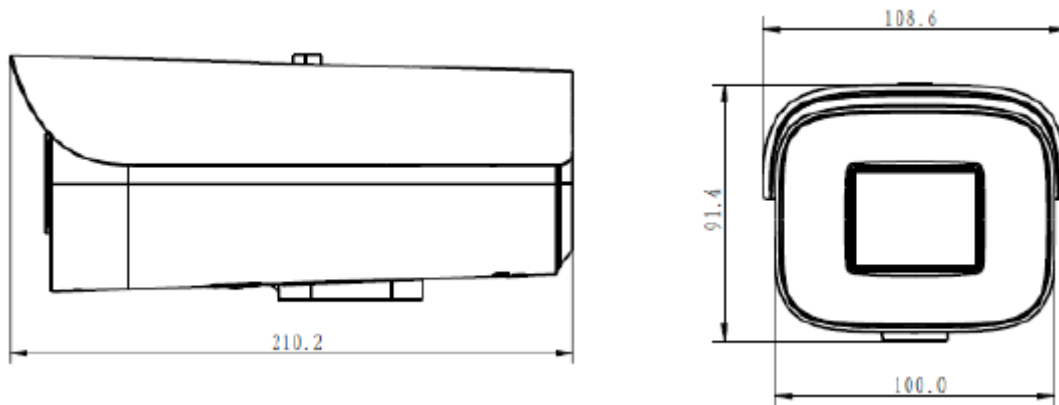

Dimensions



Recommended Accessories



Trademarks and Permissions

 HUAWEI,  and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd. All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The information in this document may contain predictive statements including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. The uncertain factors in practice may cause difference between the actual results and predicted information. Therefore, the information in this document is for reference only and does not constitute any offer or commitment. Huawei is not liable for any behavior that you make based on this document. Huawei may change the information at any time without notice.

Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Huawei Technologies Co., Ltd.

Huawei Industrial Base, Bantian,
Longgang, Shenzhen, China

Tel: (0755) 28780808

Zip code: 518129