

Huawei FusionServer 2488 V5

White Paper

Issue 05
Date 2018-11-30



Copyright © Huawei Technologies Co., Ltd. 2018. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://e.huawei.com>

Contents

1 Overview.....	1
2 Features.....	3
3 Logical Structure.....	6
4 Hardware Description.....	8
4.1 Appearance.....	8
4.2 Ports.....	9
4.3 Indicators and Buttons.....	13
4.4 PCIe Slots.....	19
4.5 Physical Structure.....	21
5 Product Specifications.....	24
5.1 Technical Specifications.....	24
5.2 Physical Specifications.....	28
6 Component Compatibility.....	31
6.1 CPU.....	31
6.2 Memory.....	33
6.3 Storage.....	37
6.4 I/O Expansion.....	39
6.5 PSU.....	43
6.6 OS and Software Support.....	43
7 System Management.....	45
8 Warranty.....	48
9 Certifications.....	49

1 Overview

The Huawei 2488 V5 is a 2U 4-socket rack server developed for Internet data center (IDC), cloud computing, enterprise, and telecom service applications.

The 2488 V5 combines high-performance computing (HPC) with large storage capacity, low power consumption, high scalability and reliability, and is easy to deploy and manage. It is ideal for various application scenarios, such as database, cloud computing, virtualization, and memory computing application scenarios.

The 2488 V5 supports the following configurations:

- 8 SAS/SATA drives

The server supports a maximum of eight 2.5-inch front SAS/SATA drives. One standard PCIe RAID controller card is required.

In this configuration, the server supports a DVD-ROM drive or an LCD on the front panel. By default, the server provides a video graphics array (VGA) port and a USB 3.0 port on the front panel.

- 25 SAS/SATA drives

The server supports a maximum of twenty-five 2.5-inch front SAS/SATA drives. One standard PCIe RAID controller card is required.

- 16 SAS/SATA drives + 8 NVMe SSDs

The server supports a maximum of sixteen 2.5-inch front SAS/SATA drives with one standard PCIe RAID controller card required, and supports a maximum of eight 2.5-inch front NVMe SSDs with two NVMe adapters required. Each adapter supports four NVMe SSDs.

Figure 1-1 Appearance of the 2488 V5



2 Features

Performance and Scalability

The 2488 V5 offers the following features to boost performance and improve scalability:

- Intel® Xeon® Scalable Platinum 8100, Gold 6100, or Gold 5100 processors ensure high processing performance by providing up to 28 cores, 3.6 GHz frequency, 38.5 MB L3 cache, and three 10.4 GT/s Ultra Path Interconnect (UPI) links between processors. The UPI links enables 4-socket CPU full-mesh topology interconnection, delivering highest processing performance.
 - A 2488 V5 supports four processors, 112 cores, and 224 threads, which maximizes the concurrent execution of multithreaded applications.
 - The layered architecture of the processor cache is optimized to increase the L2 cache capacity. Memory data can be directly processed by the L2 cache, which greatly improves the memory access performance. Each core can exclusively use 1 MB L2 cache, reducing the L3 cache capacity. A single processor can share a maximum of 38.5 MB L3 cache.
 - Intel® Turbo Boost Technology 2.0 enables processor cores to run at maximum speeds during peak hours by temporarily going beyond the processor thermal design power (TDP).
 - Intel® Hyper-Threading Technology enables each processor core to run up to two threads, improving parallel computation capability.
 - Intel® Virtualization Technology integrates hardware-level virtualization functions to allow OS vendors to better use hardware to address virtualization workloads.
- Up to thirty-two DDR4 error checking and correcting (ECC) RDIMMs or load-reduced DIMMs (LRDIMMs) provide a maximum memory speed of 2666 MT/s and a maximum memory capacity of 4096 GB, featuring high speed and availability. The maximum memory bandwidth is 499.9 GB/s in theory. The following memory operating modes are available and failed DIMMs can be isolated, improving memory subsystem reliability.
 - Independent Channel Mode
 - Rank Sparing Mode
 - Mirrored Channel Mode
 - Lockstep Channel Mode
- Intel® Advanced Vector Extensions 512 (AVX-512) uses up to two 512-bit fused multiply add (FMA) units to allow an application to pack 32 double and 64 single-

precision floating-point operations, and eight 64-bit and sixteen 32-bit integers in a clock cycle of a 512-bit vector. Compared with Intel® AVX 2.0, AVX-512 doubles the register width, number of registers, and FMA unit width.

- 12 Gbit/s internal SCSI (SAS) storage connection doubles the data transmission rate compared with the 6 Gbit/s SAS storage connection, maximizing the performance of I/O-intensive applications.
- The I/O performance of pure SSDs is higher than that of mixed configuration of SSDs and HDDs and 100 times that of pure HDDs.
- The 2488 V5 supports flexible drive configurations and provides elastic and scalable memory capacities to satisfy storage capacity and upgrade requirements.
- The Intel® Xeon® Scalable series processors incorporate the PCIe 3.0 controller using the Intel Integrated I/O. This remarkably shortens I/O latency and enhances overall system performance.
- The 2488 V5 supports up to nine PCIe 3.0 slots.

Availability and Serviceability

The 2488 V5 provides the following features to improve availability and serviceability:

- The 2488 V5 uses carrier-class components and follows the engineering process, which dramatically improves system reliability.
- The 2488 V5 uses hot-swappable SATA and SAS drives. It supports redundant array of independent disks (RAID) 0, 1, 1E, 10, 5, 50, 6, and 60 and offers RAID cache. A supercapacitor is used to protect RAID cache data from power failures.
- The UID and health indicators, fault diagnosis LED, and touchable LCD diagnosis panel on the panel and the key component status displayed on the iBMC WebUI help technical support personnel quickly locate faulty components or fault risks. This simplifies maintenance, shortens troubleshooting time, and improves system availability.
- SSDs offer better reliability than HDDs, which extends the Mean Time Between Failures (MTBF).
- The Huawei integrated management module (iBMC) monitors system parameters in real time, triggers alarms, and performs recovery actions in case of failures. This helps minimize system downtime.
- For the products with three-year warranty used in China, Huawei provides customer replaceable units and onsite limited warranty 9 x 5 next business day. Optional service upgrades are available.
- Huawei provides a three-year warranty for parts replacement and repair for the servers used outside China. Huawei provides a 9-hour-a-day, 5-day-a-week support program. Service requests will be handled the next business day. Huawei delivers the repaired or new parts within 45 calendar days after receiving the defective parts.

Manageability and Security

The 2488 V5 provides the following features to enhance manageability and security:

- The built-in iBMC module monitors server operating status and provides remote management.
- The 2488 V5 supports a power-on password to ensure system startup and management security.

- The Network Controller Sideband Interface (NC-SI) feature allows a network port to provide functions of both a management network port and a service port. This feature is disabled by default and can be enabled on the iBMC or BIOS.
- The integrated industry-standard Unified Extensible Firmware Interface (UEFI) increases configuration and update efficiency, and simplifies fault handling.
- The trusted platform module (TPM) provides advanced encryption functions, such as digital signatures and remote authentication.
- The front bezel in the server chassis is locked to ensure local data security and reliability.
- The Intel Execute Disable Bit (EDB) function prevents malicious buffer overflow attacks when working with a supported OS.
- The Intel® Trusted Execution technology provides enhanced security by using hardware-based defense against malicious software attacks, allowing an application to run in an isolated space from all other applications running on the OS.

NOTE

The service network port supporting NC-SI has the following features:

- The service network port can be bound to any network port (host network port 1 by default) on the LAN on motherboard (LOM) of the server.
- The service network port allows you to enable, disable, and configure a virtual local area network (VLAN) ID. The VLAN ID is disabled by default, and the default VLAN ID is 0.
- The service network port supports IPv4 and IPv6 addresses. You can set an IP address, subnet mask, default gateway, and IPv6 address prefix length for the service network port.

Energy Efficiency

The 2488 V5 offers the following features to save energy:

- The 1288H V5 supports 80 Plus Platinum power supply units (PSUs). The PSUs provide 94% power efficiency at 50% loads.
- The voltage regulator-down (VRD) PSUs reduce the energy loss in DC/DC power conversion.
- The 2488 V5 supports area-based and intelligent fan speed adjustment, Proportional-Integral-Derivative (PID) speed adjustment, and intelligent processor frequency adjustment, reducing power consumption.
- The improved thermal design with energy-efficient fans ensures optimal heat dissipation and reduces system power consumption.
- The 2488 V5 supports power capping and power control.
- Drives are not powered on simultaneously, which reduces the server startup power consumption.
- The Intel® Intelligent Power Capability allows a single processor to be powered on or off based on site requirements.
- Low-voltage Intel® Xeon® processors consume less energy and apply to the data center and telecommunication environments that have power and thermal limitations.
- SSDs consume 80% less power than HDDs.

Support for Customization

- Huawei designs the product and owns the intellectual property.
- Huawei provides quick customized development and delivery.

3 Logical Structure


Figure 1-1 shows the logical structure of the 2488 V5.

The 2488 V5 supports up to four Intel® Xeon® Scalable CPUs and also supports two-CPU configuration. Each CPU supports six memory channels, among which four channels support one DIMM per channel (1DPC) and two channel support 2DPC. Therefore, each CPU supports a maximum of eight DIMM slots. When equipped with four CPUs, the 2488 V5 supports a maximum of 32 DDR4 DIMMs. The CPUs interconnect with each other in a full-mesh topology through Ultra Path Interconnect (UPI) links at a speed of up to 10.4 GT/s.

The 2488 V5 provides up to nine standard PCIe 3.0 slots (including three internal slots: slot 7 to slot 9) of various specifications, and provides low-speed I/O ports, such as the VGA port, USB 3.0 ports, and serial port (RJ45) to meet the requirements in various application scenarios.

The 2488 V5 provides two 10GE optical LOM ports and two GE electrical ports to meet basic I/O requirements of users without connecting external PCIe cards.

Figure 3-1 Logical structure of the 2488 V5

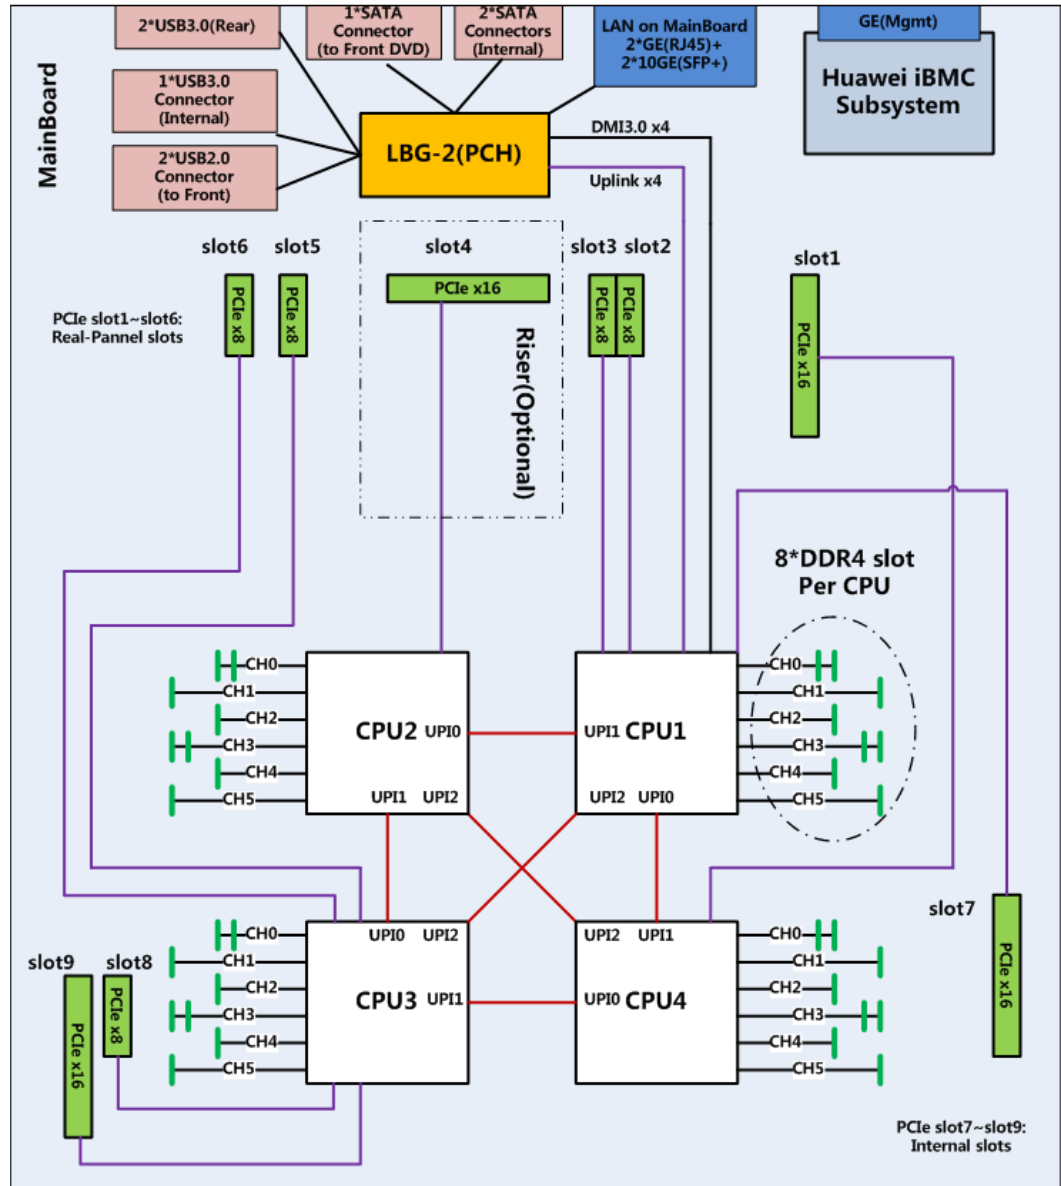

4 Hardware Description


- 4.1 Appearance
- 4.2 Ports
- 4.3 Indicators and Buttons
- 4.4 PCIe Slots
- 4.5 Physical Structure

4.1 Appearance

Front Panel

- **Figure 4-1** shows the front panel of the 2488 V5 with eight SAS/SATA drives.

Figure 4-1 Front panel of the 2488 V5 with eight SAS/SATA drives

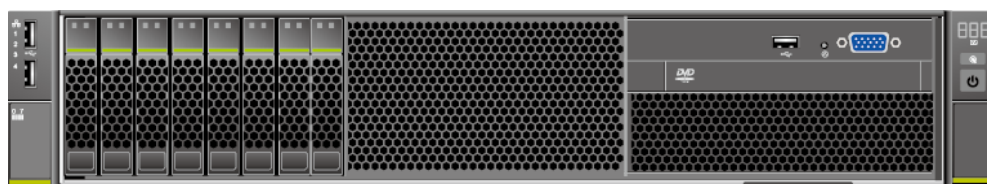

- **Figure 4-2** shows the front panel of the 2488 V5 with 25 drives.

Figure 4-2 Front panel of the 2488 V5 with 25 SAS/SATA drives



- **Figure 4-3** shows the front panel of the 2488 V5 with 16 SAS/SATA drives and 8 NVMe SSDs.

 **NOTE**

The four leftmost slots and the four rightmost slots support a total of eight NVMe SSDs

Figure 4-3 Front panel of the 2488 V5 with 16 SAS/SATA drives and 8 NVMe SSDs



Rear Panel

Figure 4-4 shows the 2488 V5 rear panel.

Figure 4-4 Rear panel



4.2 Ports

Front Panel

- **Figure 4-5** shows the front panel of the 2488 V5 with 8 SAS/SATA drives.


Figure 4-5 Front panel of a server with 8 SAS/SATA drives



1	USB 3.0 ports	2	VGA port
3	Label (with the SN label)	4	Built-in DVD drive or touchable LCD module
5	SAS/SATA drives	6	USB 2.0 ports

- **Figure 4-6** shows the front panel of the 2488 V5 with 25 SAS/SATA drives.


Figure 4-6 Front panel of a server with 25 SAS/SATA drives

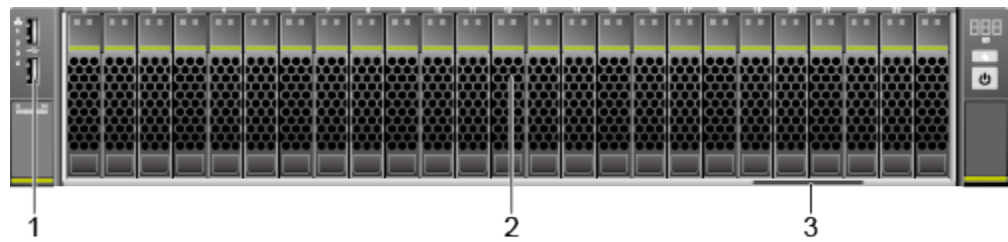

1	USB 2.0 ports	2	SAS/SATA drives
3	Label (with the SN label)	-	-

- **Figure 4-7** shows the front panel of the 2488 V5 with 16 SAS/SATA drives and 8 NVMe SSDs.

Figure 4-7 Front panel of a server with 16 SAS/SATA drives and 8 NVMe SSDs

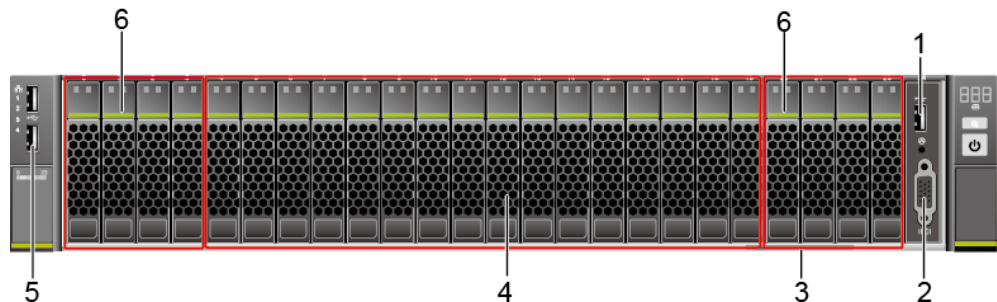

1	USB 3.0 ports	2	VGA port
3	Label (with the SN label)	4	SAS/SATA drives
5	USB 2.0 ports	6	NVMe SSDs
Note: The four leftmost slots and the four rightmost slots support a total of eight NVMe SSDs.			

Table 4-1 Ports on the front panel


Port	Type	Description
VGA port	DB15	The VGA port is connected to a terminal, such as a monitor or physical KVM.

Port	Type	Description
USB port	USB 2.0/USB 3.0	The USB ports allow USB devices to be connected to the server. NOTE Before connecting an external USB device, check that the USB device functions properly. A server may operate abnormally if an abnormal USB device is connected.

Rear Panel

Figure 4-8 shows the 2488 V5 rear panel.

Figure 4-8 Rear panel

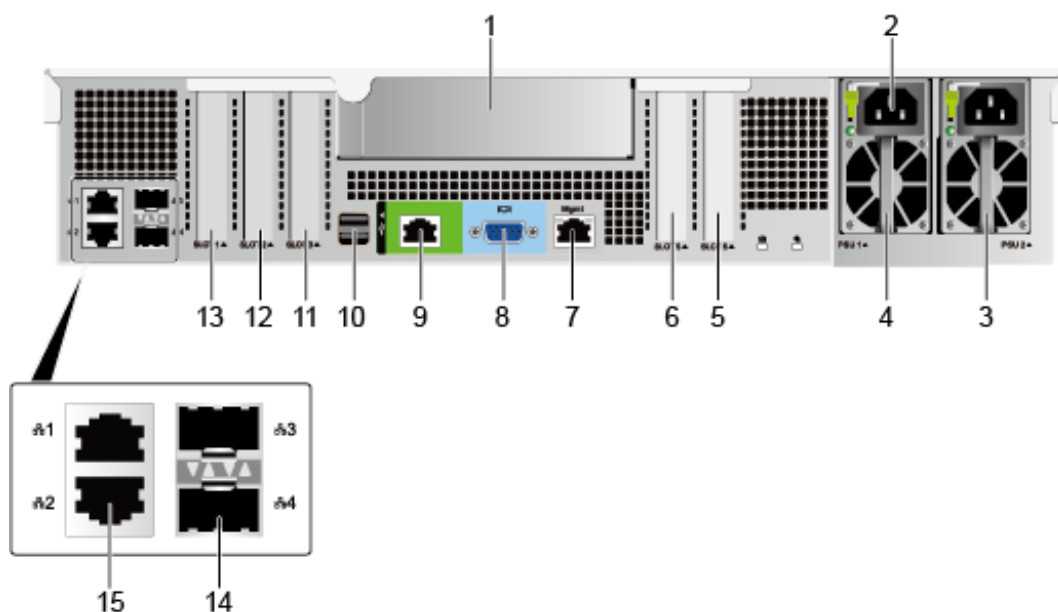

1	PCIe slot 4	2	PSU socket
3	PSU 2	4	PSU 1
5	PCIe slot 6	6	PCIe slot 5
7	Management network port	8	VGA port
9	Serial port	10	USB 3.0 port
11	PCIe slot 3	12	PCIe slot 2
13	PCIe slot 1	14	10GE optical port
15	GE electrical port	-	-

Table 4-2 Ports on the rear panel

Port	Type	Quantity	Description
GE electrical port	Electrical port	2	The mainboard provides two GE electrical LOM ports and two 10GE optical LOM ports, and does not support other electrical and optical LOM ports. NOTE <ul style="list-style-type: none"> ● The LOM ports do not support the forcible rate and or SR-IOV feature. ● 10GE optical ports do not support 10 Mbit/s or 100 Mbit/s networks and the rate cannot be forcibly set to 1000 Mbit/s. ● GE electrical port does not support forcible rates or 10 Mbit/s and 100 Mbit/s networks. ● The X722 NIC with GE electrical ports does not support interconnection with the PoE power supply device, for example, the PoE switch with the PoE function enabled. If the NIC is forcibly connected, the link communication may be abnormal or the NIC may be damaged.
10GE optical port	Optical port	2	
VGA port	DB15	1	The VGA port is connected to a terminal, such as a monitor or physical KVM.
Serial port	RJ45	1	The serial port is used as the system serial port by default. You can set it as the iBMC serial port by using the iBMC command. This port is used for debugging.
Management network port	Ethernet port	1	The 1000 Mbit/s Ethernet port is used for server management, support 10/100/1000 Mit/s auto-negotiation.
USB port	USB 3.0	2	The USB ports allow USB devices to be connected to the server. NOTE Before connecting an external USB device, check that the USB device functions properly. A server may operate abnormally if an abnormal USB device is connected.
PSU socket	-	1 or 2	Determine the number of PSUs based on actual requirements, but ensure that the rated power of the PSUs is greater than that of the server. When one PSU is used, Predicted PSU Status on the iBMC WebUI cannot be set to Active/Standby .

4.3 Indicators and Buttons

Front Panel Indicators and Buttons

- **Figure 4-9** shows the indicators and buttons on the front panel of a server with eight 2.5-inch drives.


Figure 4-9 Front panel of a server with eight 2.5-inch drives



1	Network port connection status indicators (1 to 4 from top to bottom)	2	Non-Maskable Interrupt (NMI) button
3	Fault diagnostic LED	4	Health indicator
5	Unit Identification (UID) button/indicator	6	Power button/indicator

- **Figure 4-10** shows the indicators and buttons on the front panel of a server with twenty-four 2.5-inch drives.


Figure 4-10 Front panel of a server with twenty-four 2.5-inch drives

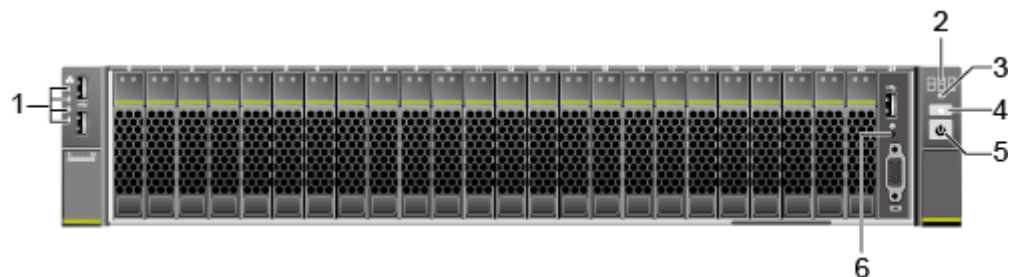

1	Network port connection status indicators (1 to 4 from top to bottom)	2	Fault diagnostic LED
3	Health indicator	4	UID button/indicator
5	Power button/indicator	6	NMI button

- **Figure 4-11** shows the indicators and buttons on the front panel of a server with twenty-five 2.5-inch drives.

Figure 4-11 Front panel of a server with twenty-five 2.5-inch drives

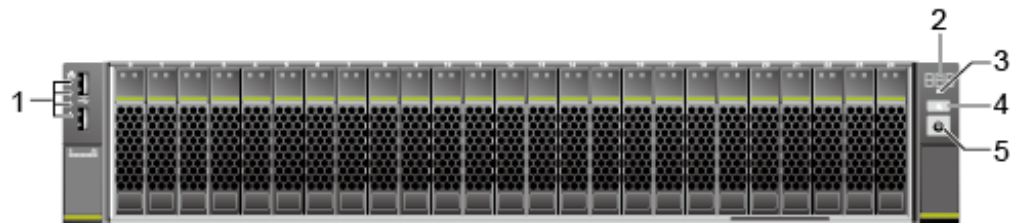





1	Network port connection status indicators (1 to 4 from top to bottom)	2	Fault diagnostic LED
3	Health indicator	4	UID button/indicator
5	Power button/indicator	-	-

Table 4-3 describes the indicators and buttons on the front panel.

Table 4-3 Indicators and buttons on the front panel


Silk Screen	Indicator/ Button	State Description
	Fault diagnostic LED	<ul style="list-style-type: none"> ● ---: The server is operating normally. ● Error code: A server component is faulty. For details about error codes, see the Huawei Rack Server iBMC Alarm Handling.
	Power button/ indicator	<p>Power indicator</p> <ul style="list-style-type: none"> ● Steady yellow: The server is ready to power on. ● Steady green: The server is properly powered on. ● Blinking yellow: The iBMC is starting. ● Off: The server is not connected to a power source. <p>Power button</p> <ul style="list-style-type: none"> ● When the server is powered on, you can press this button to shut down the OS. ● When the server is powered on, you can hold down this button for 6 seconds to force the server to power off. <p>NOTE After the server is powered off forcibly, wait for more than 10s to ensure that the server is powered off completely. Then you can power on the server again.</p> <ul style="list-style-type: none"> ● When the server is ready to power on, you can press this button to start the server.

Silk Screen	Indicator/ Button	State Description
	UID button/ indicator	<p>UID indicator</p> <ul style="list-style-type: none"> ● Steady blue/Blinking blue: The server is being located. ● Off: The server is not being located. <p>UID button</p> <ul style="list-style-type: none"> ● You can press this button to turn on or off the UID indicator. ● You can press and hold down this button for 4 to 6 seconds to reset the iBMC.
	Health indicator	<ul style="list-style-type: none"> ● Steady green: The server is operating properly. ● Blinking red at 1 Hz: A major alarm has been generated on the server. ● Blinking red at 5 Hz: A critical alarm has been generated on the server.
	NMI button	<p>The NMI button triggers a server to generate a non-maskable interrupt. You can press this button or control it remotely through the iBMC WebUI.</p> <p>NOTE</p> <ul style="list-style-type: none"> ● Use the NMI button only when the OS is abnormal. Do not use this button when the server is operating properly. ● Use the NMI button only for internal commissioning. Before using this button, ensure that the OS has the NMI processing program. Otherwise, the OS may crash. Exercise caution when using this button.
	Network port connection status indicator	<p>Each indicator shows the status of an Ethernet port on the LOM.</p> <ul style="list-style-type: none"> ● Steady green: The network port is properly connected. ● Off: The network port is not in use or has failed. <p>NOTE</p> <p>The indicators correspond to the two 10GE and two GE LOM ports.</p>

Rear Panel Indicators

Figure 4-12 shows the indicators on the rear panel of a server.

Figure 4-12 Indicators on the rear panel

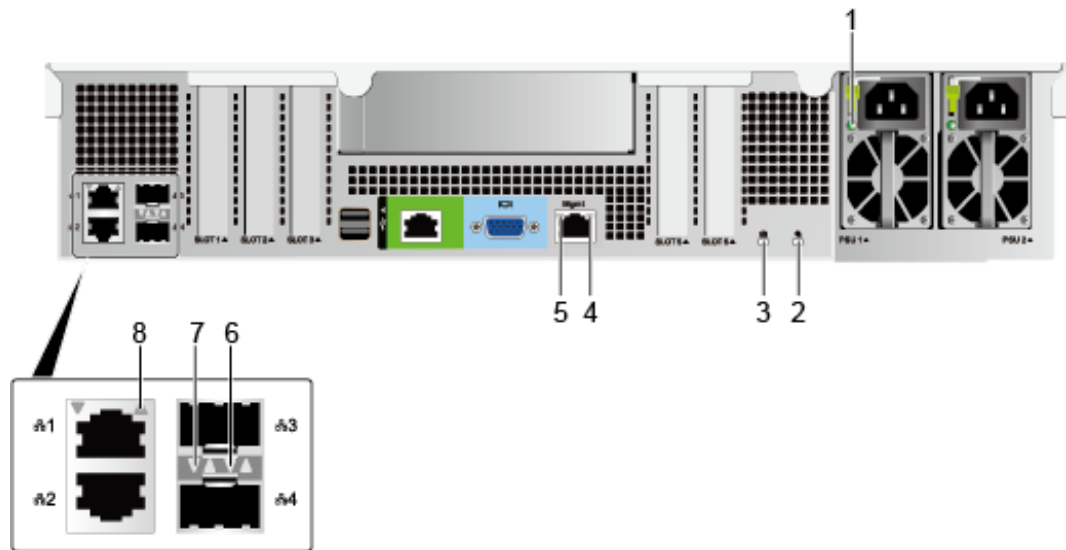

1	PSU indicator	2	UID indicator
3	Health indicator	4	Connection status indicator
5	Data transmission status indicator	6	Transmission rate indicator
7	Connection status indicator/Data transmission status indicator	8	Connection status indicator/Data transmission status indicator

Table 4-4 Indicators on the rear panel


Indicator		State Description
Two GE electrical ports	Connection status indicator/Data transmission status indicator	<ul style="list-style-type: none"> ● Steady yellow: The network port is properly connected. ● Blinking yellow: Data is being transmitted. ● Off: The network port is not connected.
Two 10GE optical ports	Connection status indicator/Data transmission status indicator	<ul style="list-style-type: none"> ● Steady green: The network port is properly connected. ● Blinking green: Data is being transmitted. ● Off: The network port is not connected.
	Transmission rate indicator	<ul style="list-style-type: none"> ● Steady green: The data transmission rate is 1 Gbit/s or 10 Gbit/s. ● Off: The network port is not connected, or the data transmission rate is not 1 Gbit/s or 10 Gbit/s.

Indicator		State Description
Management network port	Connection status indicator	<ul style="list-style-type: none"> ● Steady green: The network port is properly connected. ● Off: The network port is not connected.
	Data transmission status indicator	<ul style="list-style-type: none"> ● Blinking yellow: Data is being transmitted. ● Off: No data is being transmitted.
UID indicator		<p>The UID indicator helps identify and locate a server. You can turn on or off the UID indicator by pressing the UID button, clicking the virtual button on the iBMC WebUI, or remotely running a command on the iBMC CLI.</p> <ul style="list-style-type: none"> ● Steady blue/Blinking blue: The server is being located. ● Off: The server is not being located.
Health indicator		<ul style="list-style-type: none"> ● Steady green: The server is operating properly. ● Blinking red at 1 Hz: A major alarm has been generated on the server. ● Blinking red at 5 Hz: A critical alarm has been generated on the server.
PSU indicator		<ul style="list-style-type: none"> ● Steady green: The power input and output are normal. ● Steady orange: The input is normal, but no power output is supplied due to overheat protection, overcurrent protection, short circuit protection, output overvoltage protection, or some component failures. ● Blinking green at 1 Hz: <ul style="list-style-type: none"> - The input is normal, the server is standby, and the PSU is in MV6 mode. (The output voltage is 6.7 V.) - The input is overvoltage or undervoltage. - The PSU is in deep hibernation mode. ● Blinking green at 4 Hz: under online firmware upgrade. ● Off: No AC power is supplied.

SAS/SATA Drive Indicators

Figure 4-13 shows the SAS/SATA drive indicators.

Figure 4-13 SAS/SATA drive indicators



describes the SAS/SATA drive indicators.

Table 4-5 SAS/SATA drive indicators

Indicator	State Description
Drive fault indicator	<ul style="list-style-type: none"> ● Off: The drive is operating normally or not detected in a RAID array. ● Blinking yellow: The server is locating the drive or rebuilding RAID. ● Steady yellow: The drive is not detected, the drive is faulty, or the RAID array status of the drive is abnormal. <p>NOTE If the fault indicator is steady yellow, run a command to check the RAID status to determine whether the RAID array status is abnormal or whether the drive is faulty. For details about command description, see Huawei V5 Server RAID Controller Card User Guide.</p>
Drive activity indicator	<ul style="list-style-type: none"> ● Off: The drive is faulty or not detected. ● Blinking green: Data is being read from or written to the drive, or synchronized between drives. ● Steady green: The drive is inactive.

NVMe SSD Indicators

[Figure 4-14](#) shows the NVMe SSD indicators.

Figure 4-14 NVMe SSD indicators



[Table 4-6](#) describes the NVMe SSD indicators.

Table 4-6 Indicators on NVMe SSDs


Green Indicator	Yellow Indicator	State Description
Off	Off	The NVMe SSD cannot be detected.
Steady green	Off	The NVMe SSD is detected and working properly.
Blinking green at 2 Hz	Off	Data is being read from or written to the NVMe SSD.
Off	Blinking yellow at 2 Hz	The NVMe SSD is being hot-swapped.

Green Indicator	Yellow Indicator	State Description
Off	Blinking yellow at 0.5 Hz	The NVMe SSD completes the hot removal process and is removable.
Steady green or off	Steady yellow	The NVMe SSD is faulty.

4.4 PCIe Slots

Figure 4-15 shows the PCIe slot layout of the 2488 V5.

Figure 4-15 PCIe slots

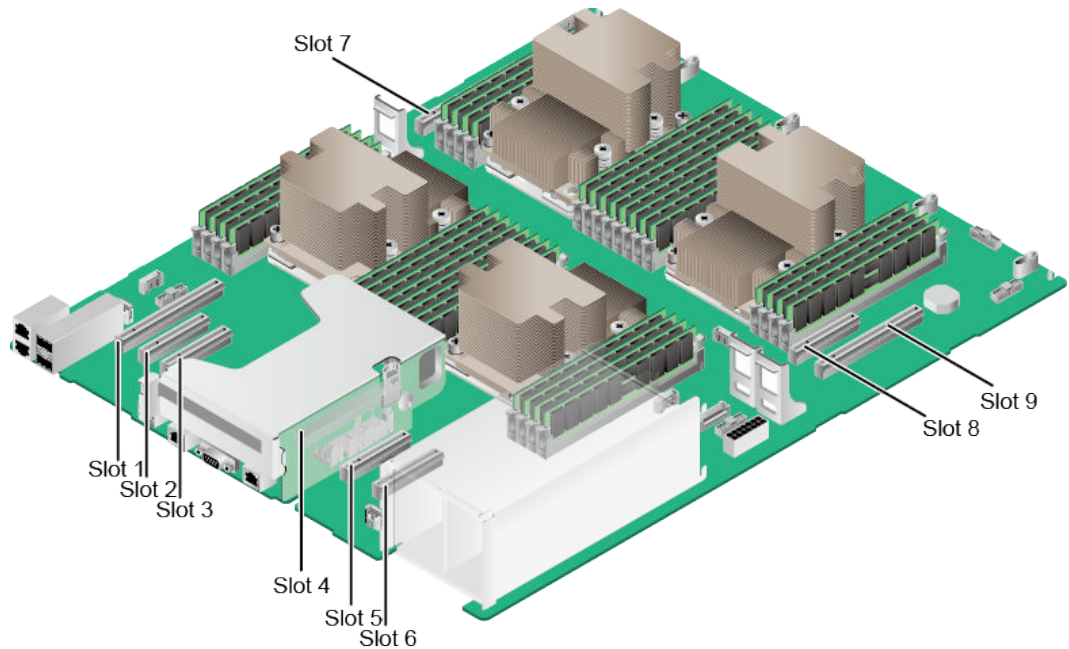

The riser card provides slot 4, and the mainboard provides slots 1 to 3 and slots 5 to 9.

Table 4-7 describes the mapping between PCIe slots and CPUs, and the PCIe specifications of the 2488 V5.

NOTE

The PCIe slots mapping to a vacant CPU socket are unavailable.

Table 4-7 PCIe slot description

PCIe Device	CPU	PCIe Standard	Connect or Bandwidth	Bus Width	Port Number	Bus/ Device/ Function Number (B/D/F)	Slot Size
Slot 1	CPU 4	PCIe 3.0	x16	x16	Port 2a	0xE2/0/0	Half-height half-length
Slot 2	CPU 1	PCIe 3.0	x8	x8	Port 1a	0x8/0/0	Half-height half-length
Slot 3	CPU 1	PCIe 3.0	x8	x8	Port 1c	0x8/2/0	Half-height half-length
Slot 4	CPU 2	PCIe 3.0	x16	x16	Port 2a	0x62/0/0	Full-height half-length
Slot 5	CPU 3	PCIe 3.0	x8	x8	Port 2c	0xA2/2/0	Half-height half-length
Slot 6	CPU 3	PCIe 3.0	x8	x8	Port 2a	0xA2/0/0	Half-height half-length
Slot 7	CPU 1	PCIe 3.0	x16	x16	Port 2a	0x24/0/0	Half-height half-length
Slot 8	CPU 3	PCIe 3.0	x8	x8	Port 3c	0xB1/2/0	Half-height half-length
Slot 9	CPU 3	PCIe 3.0	x16	x16	Port 1a	0x83/0/0	Half-height half-length
LOM	CPU1	PCIe3.0	-	x16	Port3c	0x32/0x02/0x00	-

PCIe Device	CPU	PCIe Standard	Connect or Bandwidth	Bus Width	Port Number	Bus/ Device/ Function Number (B/D/F)	Slot Size
-------------	-----	---------------	----------------------	-----------	-------------	--------------------------------------	-----------

Note 1: The PCIe slots that support full-height half-length PCIe cards are backwards compatible with half-height half-length PCIe cards.

Note 2: The PCIe slots that support PCIe x16 cards are backwards compatible with PCIe x8, PCIe x4, and PCIe x1 cards.


Note 3: All slots support PCIe cards of up to 75 W. The power of a PCIe card depends on its model. Use the [Huawei Server Compatibility Checker](#) to check PCIe cards supported by the server. For PCIe cards not listed in the [Huawei Server Compatibility Checker](#), contact your local Huawei sales personnel.

Note 4: This table lists the default values of B/D/F when all CPU sockets and PCIe slots are populated. If the CPU sockets are not fully populated or a PCIe card with a PCI bridge is configured, the values of B/D/F may differ.

4.5 Physical Structure

8-Disk Configuration

Components of a 2488 V5 with 8 SAS/SATA drives

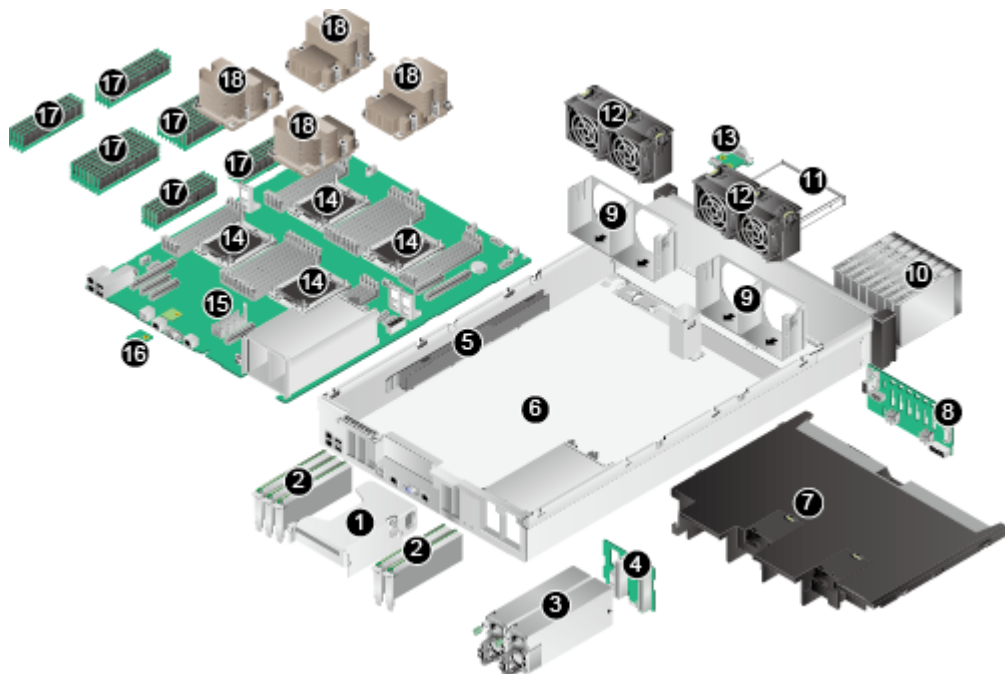


- | | | | |
|---|------------|---|---------------|
| 1 | Riser card | 2 | PCIe cards |
| 3 | PSUs | 4 | PSU backplane |

5	Cable tray	6	Chassis
7	Air duct	8	Drive backplane
9	Fan module brackets	10	Drives
11	DVD drive (or LCD)	12	Fan modules
13	VGA board	14	CPU
15	Mainboard	16	TPM
17	DIMMs	18	Heat sinks

25-Disk Configuration


Components of a 2488 V5 with 25 SAS/SATA drives

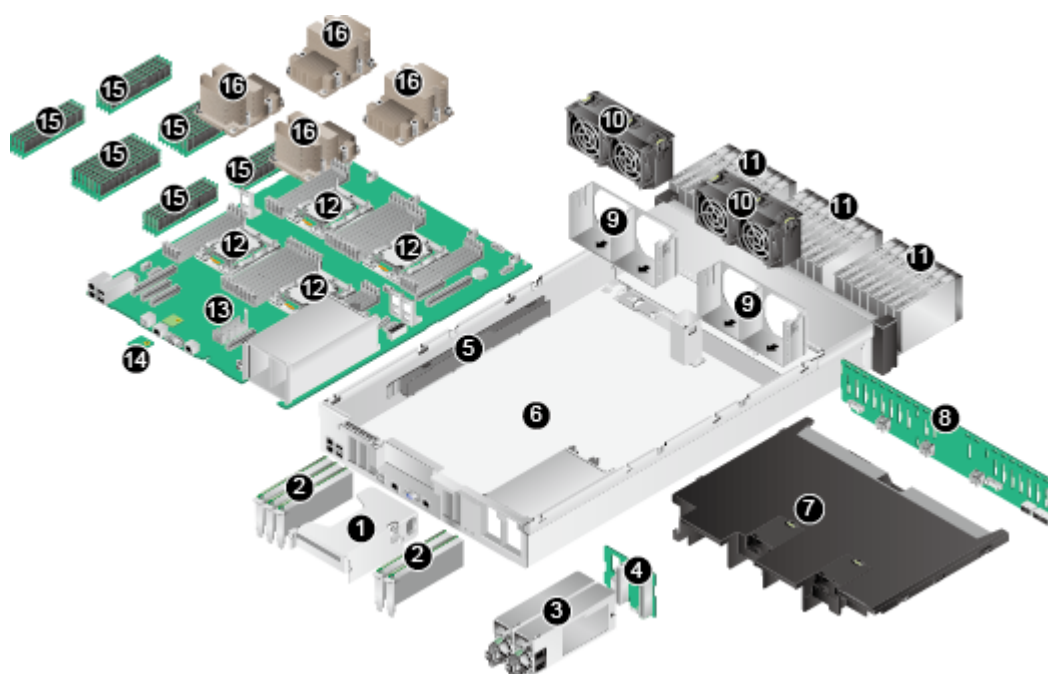

1	Riser card	2	PCIe cards
3	PSUs	4	PSU backplane
5	Cable tray	6	Chassis
7	Air duct	8	Drive backplane
9	Fan module brackets	10	Fan modules
11	Drives	12	CPUs
13	Mainboard	14	TPM
15	DIMMs	16	Heat sinks

24-Disk Configuration

Components of a 2488 V5 with 8 NVMe SSDs and 16 SAS/SATA drives

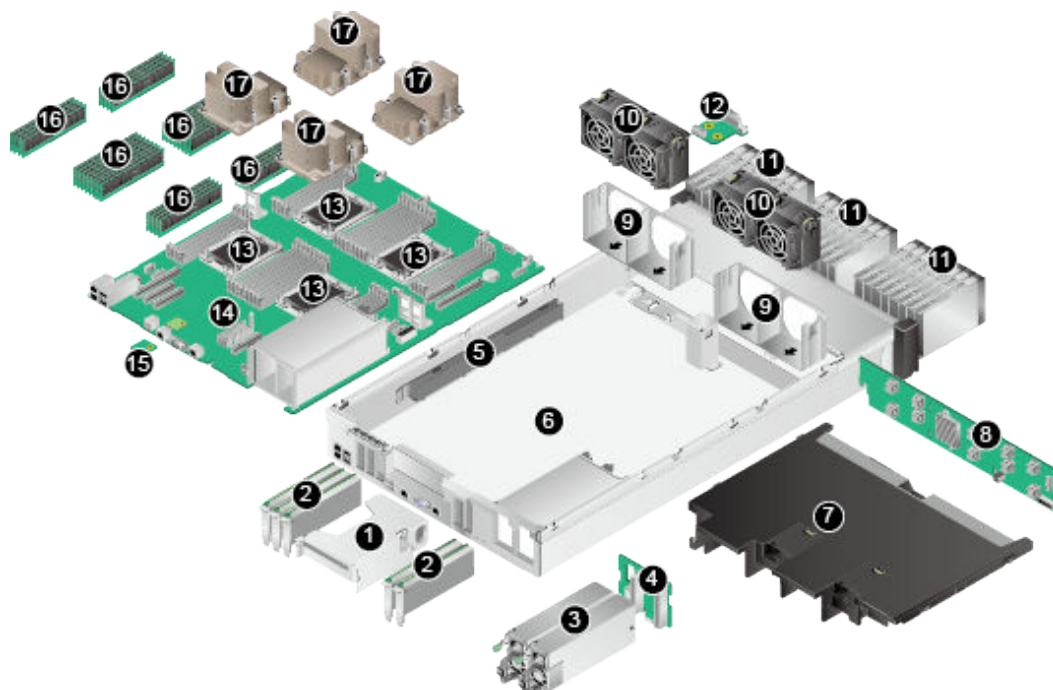

1	Riser card	2	PCIe cards
3	PSUs	4	PSU backplane
5	Cable tray	6	Chassis
7	Air duct	8	Drive backplane
9	Fan module brackets	10	Fan modules
11	Drives	12	VGA board
13	CPUs	14	Mainboard
15	TPM	16	DIMMs
17	Heat sinks	-	-

5 Product Specifications

[5.1 Technical Specifications](#)

[5.2 Physical Specifications](#)

5.1 Technical Specifications

Table 5-1 lists the 2488 V5 technical specifications.

Table 5-1 Technical specifications

Item	Specifications
Form factor	2U rack server
CPU	Up to four Intel® Xeon® Scalable Platinum 8100, Gold 6100, or Gold 5100 processors, supporting three 10.4 GT/s UPI links, a maximum memory capacity of 4 TB, a maximum memory speed of 2666 MT/s, and up to 48 PCIe 3.0 links. NOTE The server supports two or four CPUs. If two CPUs are configured, install them to slots 1 and 2.
Chipset	Intel C622

Item	Specifications
Memory	<ul style="list-style-type: none"> ● Up to 32 DDR4 DIMM slots (eight DDR4 DIMM slots per CPU) for installing either RDIMMs or LRDIMMs. ● Maximum memory speed: 2666 MT/s ● 32 x 32 GB RDIMMs, with a maximum memory capacity of 1 TB ● 32 x 64 GB RDIMMs, with a maximum memory capacity of 2 TB ● 32 x 64 GB LRDIMMs, with a maximum memory capacity of 2 TB ● 32 x 128 GB LRDIMMs, with a maximum memory capacity of 4 TB ● Data protection measures: ECC, memory mirroring, single device data correction (SDDC), adaptive double device data correction (ADDDC), and lockstep <p>NOTE DIMMs of different types (RDIMMs and LRDIMMs) and specifications (such as the capacity, bit width, rank, and height) cannot be installed on one server. The DIMMs on one server must have the same BOM number. For details about BOM numbers, use the Huawei Server Compatibility Checker.</p>
Storage	<ul style="list-style-type: none"> ● The 2488 V5 supports the following drive configurations: <ul style="list-style-type: none"> - 8 SAS/SATA drives: eight 2.5-inch front SAS/SATA drives with one SAS RAID controller card - 25 SAS/SATA drives: twenty-five 2.5-inch front SAS/SATA drives with one SAS RAID controller card - 16 SAS/SATA drives + 8 NVMe SSDs: sixteen 2.5-inch front SAS/SATA drives and eight 2.5-inch front NVMe SSDs with one SAS RAID controller card and two NVMe adapters ● Supports drive hot swap. ● Supports RAID 0, 1, 10, 1E, 5, 50, 6, and 60, provides an iBBU or supercapacitor to protect cache data from power failures, and supports RAID level migration, drive roaming, self-diagnosis, and web-based configuration. ● Allows a SAS RAID controller card (with 2 or 4 GB cache) to be configured on the mainboard to improve drive storage performance and supports a supercapacitor for power failure protection to ensure user data security. <p>NOTE The maximum storage capacity of the server varies depending on the maximum capacity of a single drive. For details about the maximum storage capacity of the server, contact your local Huawei sales representatives.</p>
Network port	<p>Two LOM GE network ports (RJ45) and two LOM 10GE network ports (SFP+) are supported. The NIC chip is X722. All the ports support the NC-SI and PXE functions.</p> <p>NOTICE The X722 NIC with GE electrical ports does not support interconnection with the PoE power supply device, for example, the PoE switch with the PoE function enabled. If the NIC is forcibly connected, the link communication may be abnormal or the NIC may be damaged.</p>

Item	Specifications
RAID controller card	<p>The RAID controller card supports RAID level migration and drive roaming. The server supports the following RAID controller cards:</p> <ul style="list-style-type: none"> ● Broadcom SAS3508 (SR450C-M): supports RAID 0, 1, 5, 6, 10, 50, and 60, 2 or 4 GB cache, a supercapacitor for power-off protection, and out-of-band iBMC management. ● Broadcom SAS3408 (SR150-M): supports RAID 0, 1, and 10, and out-of-band iBMC management, but does not support power-off protection. ● Broadcom 9361-8i standard PCIe RAID card: supports RAID 0, 1, 5, 6, 10, 50, and 60, 1 GB cache, supercapacitor power-off protection, and out-of-band iBMC management. ● The MSCC SmartRAID 3152-8i plug-in PCIe RAID controller card supports RAID 0/1/1ADM/5/6/10/10ADM/50/60, 2 GB cache, and supercapacitor power-off protection. ● The MSCC SmartHBA 2100-8i plug-in PCIe RAID controller card supports RAID 0/1/10/5 and does not support power-off protection. <p>NOTE These standards PCIe RAID controller cards need to be installed in specified internal slots.</p>
PCIe slot	<ul style="list-style-type: none"> ● Supports a maximum of nine PCIe 3.0 expansion slots, among which three are internal card slots and six are external card slots. See 4.4 PCIe Slots. <ul style="list-style-type: none"> - Slots 1, 7, and 9 are x16 half-height half-length PCIe slots and slot 4 is an x16 full-height full-length PCIe slot. - Slots 2, 3, 5, 6, and 8 are x8 half-height half-length PCIe slots. ● Supports Huawei-developed NVMe SSD cards, which greatly improves I/O performance for search, cache, and download services. <p>NOTE</p> <ul style="list-style-type: none"> ● Use the Huawei Server Compatibility Checker to check the PCIe cards supported by the server. For PCIe cards not listed in the Huawei Server Compatibility Checker, contact your local Huawei sales representative or Huawei technical support. ● For details about the PCIe slot configuration, contact your local Huawei sales representative.
Port	<ul style="list-style-type: none"> ● Two USB 2.0 ports, one USB 3.0 port, and one DB15 VGA port on the front panel (2488 V5 with eight 2.5-inch or twenty-four 2.5-inch drives) ● Two USB 2.0 ports on the front panel (2488 V5 with twenty-five 2.5-inch drives) ● Two USB 3.0 ports, one DB15 VGA port, one RJ45 serial port, and one RJ45 management network port on the rear panel
Fan module	<p>Four hot-swappable 8038+ fan modules, allowing one-fan failures</p>

Item	Specifications
PSU	<p>The power ratings of PSUs are as follows:</p> <ul style="list-style-type: none"> ● 1500 W AC PSU <ul style="list-style-type: none"> - 1000 W (input voltage range: 100 V to 127 V AC) - 1500 W (input voltage range: 200 V to 240 V AC) - 1500 W (input voltage range: 190 V to 300 V DC) <p>NOTE When the input voltage of 1500 W AC PSUs is 100 V AC to 127 V AC, if the output power is greater than 1000 W, the PSUs do not support 1+1 redundancy; if the output power is less than 1000 W, the PSUs support 1+1 redundancy.</p> <p>For more information about PSUs, use the Huawei Server Compatibility Checker.</p>
System management	<ul style="list-style-type: none"> ● UEFI ● Huawei iBMC Uses an independent port. Supports Simple Network Management Protocol (SNMP) and Intelligent Platform Management Interface (IPMI). Provides the GUI, virtual KVM, virtual media, Serial Over LAN (SOL), intelligent power supply, remote control, and hardware monitoring features. ● NC-SI ● Supports Huawei eSight management software and integration with third-party management systems, such as VMware vCenter, Microsoft SystemCenter, and Nagios.
Security	<ul style="list-style-type: none"> ● Power-on password ● Administrator password ● TPM ● Secure boot ● Front bezel
Video card	<p>Integrates an SM750 graphics card chip to the mainboard to provide a memory capacity of 32 MB and support a maximum resolution of 1920 x 1200 at 60 Hz with 16 M colors.</p> <p>NOTE</p> <ul style="list-style-type: none"> ● The maximum resolution 1920 x 1200 is supported only when a compatible graphics card driver is installed. Otherwise, only the default resolution supported by the OS is available. ● On a server that provides front and rear VGA ports, if only one VGA port is connected to a monitor, the display effect may be affected.

Item	Specifications
Operating system	<ul style="list-style-type: none"> ● SUSE Linux Enterprise Server 12 SP2 ● Red Hat Enterprise Linux 7.3 ● Windows Server 2012 R2 ● Windows Server 2016 ● Citrix 6.2 ● CentOS 6.9 ● CentOS 7.3 ● Ubuntu 14.04.5 ● Ubuntu 16.04.2 <p>NOTE The preceding information is for reference only. To check the supported OS versions, use the Huawei Server Compatibility Checker.</p>

5.2 Physical Specifications

[Table 5-2](#) lists the 2488 V5 physical specifications.

Table 5-2 Physical specifications

Item	Specifications
Dimensions (H x W x D)	86.1 mm (2U) x 447 mm x 748 mm (3.39 in. x 17.60 in. x 29.45 in.)
Installation space	<p>The server fits into a universal cabinet that complies with the IEC 297 standard.</p> <ul style="list-style-type: none"> ● Cabinet width: 19 in. ● Minimum cabinet depth: 900 mm (35.43 in.)
Weight in full configuration	<ul style="list-style-type: none"> ● With eight 2.5-inch drives: 27 kg (59.53 lb) ● With twenty-five 2.5-inch drives: 30 kg (66.15 lb) <p>Packaging materials: 5 kg (11.03 lb)</p>
Temperature	<p>Operating temperature: 5°C to 45°C (41°F to 113°F) (ASHRAE CLASS A2 to A4 compliant)</p> <p>Storage temperature: -40°C to +65°C (-104°F to +149°F)</p> <p>Temperature change rate: < 20°C/h (36°F/h)</p> <p>Long-term storage temperature: 21°C to 27°C (69.8°F to 80.6°F)</p> <p>NOTE For details, see Table 5-3.</p>
Humidity	<p>Operating humidity: 8% RH to 90% RH (non-condensing)</p> <p>Storage humidity: 5% to 95% RH (non-condensing)</p> <p>Humidity change rate: < 20% RH/h</p>

Item	Specifications
Air volume	≥ 198 CFM
Altitude	<p>≤3050m(10006.44ft),according to the ASHRAE standards of 2015, for altitudes above 950 m (3116.79 ft), the highest operating temperature decreases by 1°C (1.8°F) for every increase of:</p> <ul style="list-style-type: none"> ● 300 m (984.24 ft) in altitude when the server configuration complies with Class A2 standards. ● 175 m (575.14 ft) in altitude when the server configuration complies with Class A3 standards. ● 125 m (410.10 ft) in altitude when the server configuration complies with Class A4 standards.
Acoustic noise	<p>The data listed in the following is the declared A-weighted sound power levels (LWAd) and declared average bystander position A-weighted sound pressure levels (LpAm) when the server is operating in a 23°C (73.4°F) ambient environment. Noise emissions are measured in accordance with ISO 7999 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).</p> <ul style="list-style-type: none"> ● Idle: <ul style="list-style-type: none"> - LWAd: 5.1 Bels - LpAm: 38.5 dBA ● Operating: <ul style="list-style-type: none"> - LWAd: 6.1 Bels - LpAm: 45.2 dBA <p>NOTE The actual sound levels generated when the server is operating vary depending on the server configuration, workload, and ambient temperature.</p>

Table 5-3 lists the 2488 V5 temperature specifications.

Table 5-3 Temperature specifications

Server Model	ASHRAE CLASS A2 5°C to 35°C (41°F to 95°F)	ASHRAE CLASS A3 5°C to 40°C (41°F to 104°F)	ASHRAE CLASS A4 5°C to 45°C (41°F to 113°F)
Server with 8 SAS/SATA drives	Supports all configurations.	<ul style="list-style-type: none"> ● Supports CPUs with a maximum TDP of 165 W. ● Slots 1 to 6 do not support NVMe SSDs. 	<ul style="list-style-type: none"> ● Supports CPUs with a maximum TDP of 140 W. ● Slots 1 to 6 do not support NVMe SSDs.

Server Model	ASHRAE CLASS A2 5°C to 35°C (41°F to 95°F)	ASHRAE CLASS A3 5°C to 40°C (41°F to 104°F)	ASHRAE CLASS A4 5°C to 45°C (41°F to 113°F)
Server with 25 SAS/SATA drives		<ul style="list-style-type: none"> ● Supports CPUs with a maximum TDP of 165 W. ● Slots 1 to 6 do not support NVMe SSDs. 	Not supported.
Service with 16 SAS/SATA drives + 8 NVMe SSDs		<ul style="list-style-type: none"> ● Supports CPUs with a maximum TDP of 140 W. ● Slots 1 to 6 do not support NVMe SSDs. 	Not supported.

6 Component Compatibility

Use the [Huawei Server Compatibility Checker](#) to check the software and hardware supported by the server.

6.1 CPU

6.2 Memory

6.3 Storage

6.4 I/O Expansion

6.5 PSU

6.6 OS and Software Support

6.1 CPU

The 2488 V5 supports two or four Intel® Xeon® Scalable series processors (Platinum 8100, Gold 6100, or Gold 5100). If only two processors are configured, install them in the CPU 1 and CPU 2 sockets.

The following table lists the CPUs supported by the 2488 V5.

NOTE

- CPUs on the same server must be of the same model.
- For details about CPUs, visit https://www.intel.com/content/www/us/en/homepage.html?_ga=2.177735788.892605408.1505119021-2038087524.1485138084.

Table 6-1 Supported CPUs

BOM Number	Description
02311XQR	Function Module,Server,BC6M16CPU,Intel Xeon Gold 5122(3.6GHz/4-core/16.5MB/105W) Processor (with heatsink)
02311XQX	Function Module,Server,BC6M20CPU,Intel Xeon Gold 6128(3.4GHz/6-core/19.25MB/115W) Processor (with heatsink)

BOM Number	Description
02311XQM	Function Module,Server,BC6M12CPU,Intel Xeon Gold 6134(3.2GHz/8-core/24.75MB/130W) Processor (with heatsink)
02311XQU	Function Module,Server,BC6M18CPU,X86 series-FCLGA3647-3600MHz-1.6V/1.83V-64bit-105000mW-Skylake-SP Xeon Platinum 8156-4Core,with heatsink
02311XQS	Function Module,Server,BC6M24CPU,Intel Xeon Gold 5118(2.3GHz/12-core/16.5MB/105W) Processor (with heatsink)
02311XQG	Function Module,Server,BC6M07CPU,Intel Xeon Gold 6126(2.6GHz/12-core/19.25MB/125W) Processor (with heatsink)
02311XRA	Function Module,Server,BC6M22CPU,Intel Xeon Gold 6136(3.0GHz/12-core/24.75MB/150W) Processor (with heatsink)
02311XUQ	Function Module,Server,BC6M26CPU,Intel Xeon Gold 5120(2.2GHz/14-core/19.25MB/105W) Processor (with heatsink)
02311XQY	Function Module,Server,BC6M21CPU,Intel Xeon Gold 6132(2.6GHz/14-core/19.25MB/140W) Processor (with heatsink)
02311XQJ	Function Module,Server,BC6M09CPU,Intel Xeon Gold 6130(2.1GHz/16-core/22MB/125W) Processor (with heatsink)
02311XUS	Function Module,Server,BC6M28CPU,Intel Xeon Gold 6130T(2.1GHz/16-core/22MB/125W) Processor (with heatsink)
02311XQH	Function Module,Server,BC6M08CPU,Intel Xeon Gold 6142(2.6GHz/16-core/22MB/150W) Processor (with heatsink)
02311XQL	Function Module,Server,BC6M11CPU,Intel Xeon Gold 6140(2.3GHz/18-core/24.75MB/140W) Processor (with heatsink)
02311XQQ	Function Module,Server,BC6M15CPU,Intel Xeon Gold 6150(2.7GHz/18-core/24.75MB/165W) Processor (with heatsink)
02311XRB	Function Module,Server,BC6M23CPU,Intel Xeon Gold 6154(3.0GHz/18-core/24.75MB/200W) Processor (with heatsink)
02311XQK	Function Module,Server,BC6M10CPU,Intel Xeon Gold 6138(2.0GHz/20-core/27.5MB/125W) Processor (with heatsink)
02311XQP	Function Module,Server,BC6M14CPU,Intel Xeon Gold 6148(2.4GHz/20-core/27.5MB/150W) Processor (with heatsink)
02311XQN	Function Module,Server,BC6M13CPU,Intel Xeon Gold 6152(2.1GHz/22-core/30.25MB/140W) Processor (with heatsink)
02311XQV	Function Module,Server,BC6M18CPU,Intel Xeon Platinum 8156(3.6GHz/4-core/16.5MB/105W) Processor (with heatsink)
02311XQT	Function Module,Server,BC6M17CPU,Intel Xeon Platinum 8158(3.0GHz/12-core/24.75MB/150W) Processor (with heatsink)

BOM Number	Description
02311XQW	Function Module,Server,BC6M19CPU,Intel Xeon Platinum 8153(2.0GHz/16-core/22MB/125W) Processor (with heatsink)
02311XQB	Function Module,Server,BC6M02CPU,Intel Xeon Platinum 8160(2.1GHz/24-core/33MB/150W) Processor (with heatsink)
02311XQF	Function Module,Server,BC6M06CPU,Intel Xeon Platinum 8168(2.7GHz/24-core/33MB/205W) Processor(with heatsink)
02311XQC	Function Module,Server,BC6M03CPU,Intel Xeon Platinum 8164(2.0GHz/26-core/35.75MB/150W) Processor (with heatsink)
02311XQD	Function Module,Server,BC6M04CPU,Intel Xeon Platinum 8170(2.1GHz/26-core/35.75MB/165W) Processor (with heatsink)
02311XQE	Function Module,Server,BC6M05CPU,Intel Xeon Platinum 8176(2.1GHz/28-core/38.5MB/165W) Processor (with heatsink)
02311XQA	Function Module,Server,BC6M01CPU,Intel Xeon Platinum8180(2.5GHz/28-Core/39MB/205W)Processor (with heatsink)

6.2 Memory

Memory Configuration Rules

The 2488 V5 supports up to 16 DIMMs when equipped with two processors and supports up to 32 DIMMs when equipped with four processors.

Observe the following rules when configuring DIMMs:

1. At least one DIMM must be configured.
2. DIMMs of different types (RDIMMs and LRDIMMs) cannot be installed on one server.
3. Each channel supports a maximum of eight ranks.

 **NOTE**

A channel supports more than eight ranks for LRDIMMs, because a quad-rank LRDIMM generates the same electrical load as a single-rank RDIMM on a memory bus.

4. The maximum number of DIMMs to be installed on the server varies with the processor type, DIMM type, number of ranks, and operating voltage. For details, see **Maximum number of DIMMs** in the following tables.

 **NOTE**

Restriction of the number of ranks supported by each channel on the maximum number of DIMMs supported by each channel:

Number of DIMMs supported by each channel ≤ Number of ranks supported by each memory channel/Number of ranks supported by each DIMM

5. All DIMMs operate at the same speed, which is the smaller value of:
 - Memory speed supported by a CPU

- Lowest maximum operating speed for the selected memory configuration. This speed varies with the rated speed, operating voltage, and number of DIMMs for each memory channel. For details, see **Maximum operating speed** in the following tables.

Table 6-2 RDIMM configuration

Parameter	RDIMM
Rank	Single Rank, dual rank, and quad rank
Rated speed (MT/s)	2666
Operating voltage (V)	1.2
Maximum number of DIMMs	32
Maximum capacity per DIMM (GB)	64
Maximum memory capacity (GB)	2048
Maximum operating speed (MT/s)	2666
Note: The maximum number of DIMMs listed in this table is based on four processors. These values are halved for a server with only two processors.	

Table 6-3 LRDIMM configuration

Parameter	LRDIMM
Rank	Single Rank, dual rank, and quad rank
Rated speed (MT/s)	2666
Operating voltage (V)	1.2
Maximum number of DIMMs	32
Maximum capacity per DIMM (GB)	64
Maximum memory capacity (GB)	2048
Maximum operating speed (MT/s)	2666
Note: The maximum number of DIMMs listed in this table is based on four processors. These values are halved for a server with only two processors.	

Memory Slot Configuration Rules

- The server supports DIMMs of 8 GB, 16 GB, 32 GB, and 64 GB. A server fully configured with DIMMs has up to 2048 GB of memory.
- The server provides up to 32 DDR4 DIMM slots. Each processor supports six memory channels. Channels 0 and 3 each support two DIMMs, and other channels each support only one DIMM.

The following figure shows the DIMM slots and their numbers.

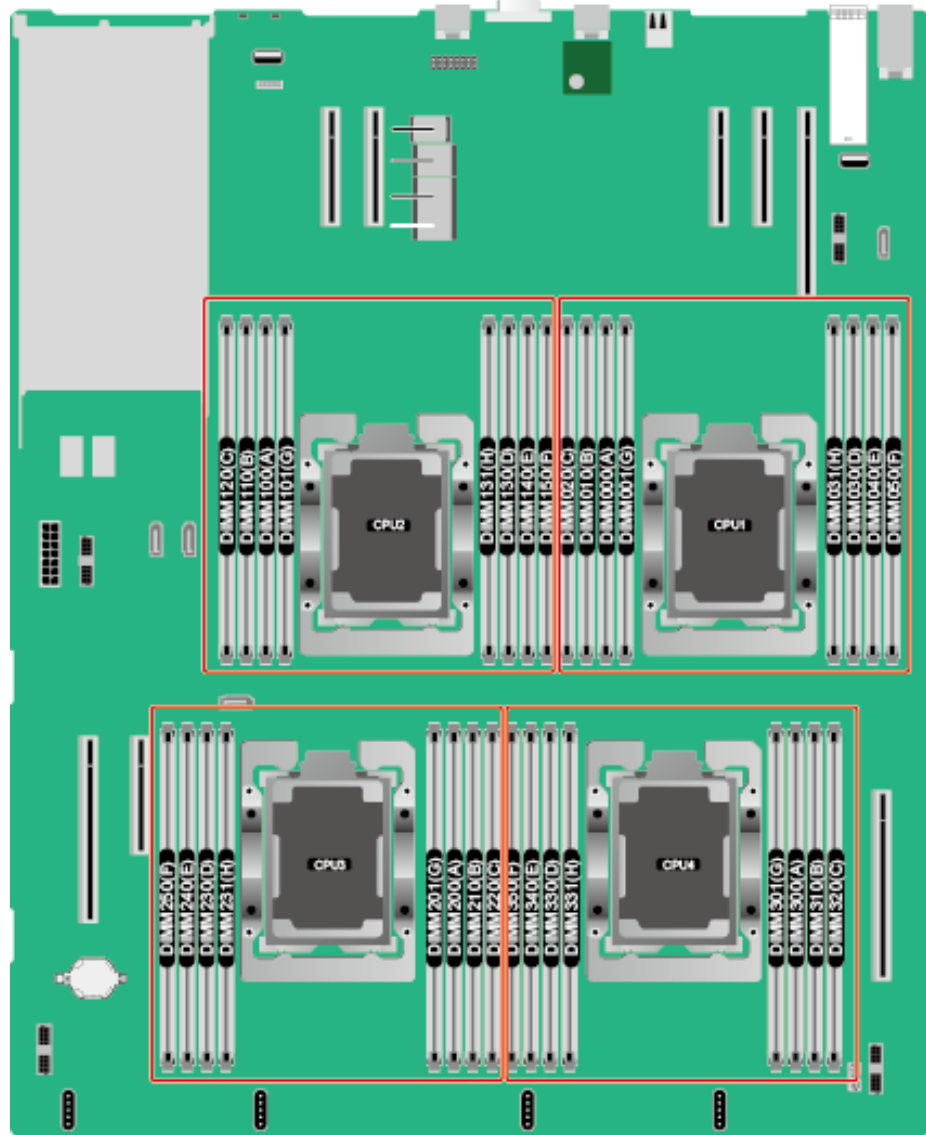


Table 6-4 lists the channels for each CPU.

Table 6-4 Memory channel combinations and DIMM configuration rules

CPU Socket	Channel	DIMM Slot Number	Number of DIMMs Supported by a CPU					
			1	2	3	4	6	8
CPU1	A	000(A)	●	●	●	●	●	●
		001(G)						●
	B	010(B)		●	●	●	●	●
	C	020(C)			●		●	●
	D	030(D)				●	●	●

CPU Socket	Channel	DIMM Slot Number	Number of DIMMs Supported by a CPU					
		031(H)						●
	E	040(E)				●	●	●
	F	050(F)					●	●
CPU2	A	100(A)	●	●	●	●	●	●
		101(G)						●
	B	110(B)		●	●	●	●	●
	C	120(C)			●		●	●
	D	130(D)				●	●	●
		131(H)						●
	E	140(E)				●	●	●
	F	150(F)					●	●
CPU3	A	200(A)	●	●	●	●	●	●
		201(G)						●
	B	210(B)		●	●	●	●	●
	C	220(C)			●		●	●
	D	230(D)				●	●	●
		231(H)						●
	E	240(E)				●	●	●
	F	250(F)					●	●
CPU4	A	300(A)	●	●	●	●	●	●
		301(G)						●
	B	310(B)		●	●	●	●	●
	C	320(C)			●		●	●
	D	330(D)				●	●	●
		331(H)						●
	E	340(E)				●	●	●
	F	350(F)					●	●

 **NOTE**

A single CPU configuring with five or seven DIMMs is asymmetrical DIMM configuration, which is not listed in the preceding table because the asymmetrical configuration will degrade the performance of the memory system. You are not advised to use such memory configuration.

Memory Protection Technologies

The server supports the following memory protection technologies:

- Advanced ECC
- Memory mirroring
- SDDC
- ADDDC
- Rank sparing
- Lockstep

Supported DIMMs

 **NOTE**

- For details about component options, consult the local Huawei sales representatives or use the [Huawei Server Compatibility Checker](#).
- DIMMs on the same server must be of the same model.

6.3 Storage

The 2488 V5 supports the following types of drive configurations:

- 8 SAS/SATA drives
The server supports a maximum of eight 2.5-inch front SAS/SATA drives. One standard RAID controller card is required.
- 25 SAS/SATA drives
The server supports a maximum of twenty-five 2.5-inch front SAS/SATA drives. One standard RAID controller card is required.

[Table 6-5](#) and [Table 6-6](#) list the supported drives.

 **NOTE**

[Table 6-5](#) and [Table 6-6](#) are for reference only. For details about component options, consult the local Huawei sales representatives.

Table 6-5 Supported SAS/SATA drives

BOM Number	Capacity	Description
02311HAN	300 GB	300GB-SAS 12Gb/s-10K rpm-2.5inch-128MB
02311EXX	300 GB	300GB-SAS 12Gb/s-15K rpm-2.5inch-128MB
02310YCH	1 TB	1000GB-SATA-7200rpm-2.5"-64M

Table 6-6 Supports NVMe SSDs

BOM Number	Capacity	Description
02311PNQ	1.8 TB	Function Module,Servers,ES3500P V3 SSD, 1800GB,NVMe PCIe,Read Intensive,1 DWPD, 2.5inch(2.5inch Drive Bay),LE Series,Tencent
02311MSC	2 TB	Function Module,Servers,ES3500P V3 SSD, 2000GB,NVMe PCIe,Read Intensive,1 DWPD, 2.5inch(2.5inch Drive Bay)
02311MSE	3.2 TB	Function Module,Servers,ES3500P V3 SSD, 3200GB,NVMe PCIe,Read Intensive,1 DWPD, 2.5inch(2.5inch Drive Bay)

Table 6-7 lists the supported standard PCIe RAID controller cards.

 **NOTE**

Table 6-7 is for reference only. For details about component options, consult the local Huawei sales representatives.

Table 6-7 Supported standard PCIe RAID controller cards

BOM Number	Chip	Description	Vendor	Remarks
02311XDW	LSI3508	Function Module,2488 V5,BC6M12RAID,SP450C-M 2G(AVAGO3508)SAS/SATA RAID card,RAID0,1,5,6,10,50,60,12 Gb/s,2GB Cache,used for 8HDD	Broadcom	Note1
02311XDX	LSI3508	Function Module,2488 V5,BC6M13RAID,SP450C-M 2G(AVAGO3508)SAS/SATA RAID card,RAID0,1,5,6,10,50,60,12 Gb/s,2GB Cache,used for 25HDD	Broadcom	Note1
02311XDY	LSI3508	Function Module,2488 V5,BC6M60RAID,SP450C-M 2G(AVAGO3508)SAS/SATA RAID card,RAID0,1,5,6,10,50,60,12 Gb/s,2GB Cache,used for 8NVME+16HDD	Broadcom	Note1

BOM Number	Chip	Description	Vendor	Remarks
02311WDP	-	Function Module,Public Module,BC1M01SCAP, 3508/3516 RAID Card SuperCap	Broadcom	Supercapacitor
Note: If a supercapacitor for power-off protection is required, select 02311WDP				

Table 6-8 describes the comparison between RAID levels in the performance, minimum number of drives, and drive usage.

Table 6-8 RAID level comparison

RAID Level	Reliability	Read Performance	Write Performance	Drive Usage
RAID 0	Low	High	High	100%
RAID 1	High	High	Low	50%
RAID 5	Relatively high	High	Medium	(N - 1)/N
RAID 6	Relatively high	High	Medium	(N - 2)/N
RAID 10	High	High	Medium	50%
RAID 50	High	High	Relatively high	(N - M)/N
RAID 60	High	High	Relatively high	(N - M x 2)/N
Note: N indicates the number of member drives in a RAID group, and M indicates the number of subgroups in a RAID group.				

6.4 I/O Expansion

The server supports a wide range of PCIe cards for you to choose based on the card type and transmission speed:

- Fiber Channel (FC) host bus adapter (HBA)
- Converged network adapter (CNA)
- InfiniBand (IB) expansion card
- SAS HBA
- Network expansion card
- SSD card

The following tables list the PCIe cards supported by the server.

 **NOTE**

The following tables are for reference only. For details about component options, consult the local Huawei sales representatives.

Table 6-9 Supported standard PCIe cards (FC HBAs)

BOM Number	Model	Description	API Type	Vendor	Remarks
06030382	QLE2692	Other Cards,HBA Card QLE2692-HUA-SP,FC Double Ports-16Gb/s,PCIE 3.0 x8-Vendor ID 1077-Device ID 2261-2,Multimode optical module,half width half length	SFP+	QLogic	Note 1
06030381	QLE2690	Other Cards,HBA Card QLE2690-HUA-SP,FC Single Port-16Gb/s,PCIE 3.0 x8-Vendor ID 1077-Device ID 2261-1,Without Doc,Multimode optical module,half width half length	SFP+	QLogic	Note 1
<p>Note:</p> <ol style="list-style-type: none"> 1. The compatibility information released by third-party vendors prevails. To download drivers, visit third-party websites. 2. The server provides SFP+ Optics. 					

Table 6-10 Supported standard PCIe cards (IB expansion cards)

BOM Number	Model	Description	API Type	Vendor	Remarks
06030284	MCX354A	Other Cards,Infiniband MCX354A-FCBT,FDR Dual port-56Gb/s,PCIE 3.0 X8-Vendor ID 15b3-Device ID 1003-1,English doc,half width half length	QSFP	QLogic	Note 1

BOM Number	Model	Description	API Type	Vendor	Remarks
<p>Note: The compatibility information released by third-party vendors prevails. To download drivers, visit third-party websites.</p>					

Table 6-11 Supported standard PCIe cards (NICs)

BOM Number	Model	Description	API Type	Vendor	Remarks
02311CWM	I350	Function Module,Server,CN2 1ITGC01,Intel I350 4*GE Half-height Half-length ,Full Handle bars,Ethernet Card,PCIe 2.0 X4-Vendor ID 8086-Device ID 1521-4	RJ45	Intel	Note 1
02311MSP	X540	Function Module,Rack Server,CN2M01ITGD,Ethernet Adapter, 10Gb Electrical Interface(Intel X540),2-Port,RJ45,PCIe 2.0 x8	SFP+	Intel	Note 1
02311PXA	X550	Function Module,Rack Server,CN2M01ITGE,Ethernet Adapter, 10Gb Electrical Interface(Intel X550),2-Port,RJ45,PCIe 2.0 x8	SFP+	Intel	Note 1

BOM Number	Model	Description	API Type	Vendor	Remarks
02311RM W	X710	Function Module,Rack Server,CN2M01ITG G,Ethernet Adapter, 10Gb Optical Interface(Intel X710),2-Port,SFP+ (without Optical Transceiver),PCIe 3.0 x8	SFP+	Intel	Note 1
02311RM Y	XL710	Function Module,Rack Server,CN2M02ITG H,Ethernet Adapter, 10Gb Optical Interface(Intel XL710),4-Port,SFP+(without Optical Transceiver),PCIe 3.0 x8	SFP+	Intel	Note 1
<p>Note: The compatibility information released by third-party vendors prevails. To download drivers, visit third-party websites.</p>					

Table 6-12 Supported standard PCIe cards (PCIe SSDs)

BOM Number	Model	Description	API Type	Vendor
02311SHA	ES3600C	Function Module,ES3000 V3,HWE36P43008M000N,ES3600C-800GB-3 DWPD-PCIE 3.0 X4-Vendor ID 19e5-Device ID 0123-1,Model number HWE36P43008M000N,HH/HL Card,NVMe SSD	PCIe 3.0	Huawei

BOM Number	Model	Description	API Type	Vendor
02311PBJ	ES3600C	Function Module,ES3000 V3,CN2M10FACP,ES3600C-3200GB-3 DWPD-PCIE 3.0 X4-Vendor ID 19e5-Device ID 0123-1,Model number HWE36P43032M000N,HH/HL Card,NVMe SSD	PCIe 3.0	Huawei

6.5 PSU

Table 6-13 lists the PSU supported by the server.

 **NOTE**

- **Table 6-13** is for reference only. For details about component options, consult the local Huawei sales representatives.
- A server must use PSUs of the same model.

Table 6-13 Supported PSUs

BO M Nu mbe r	Rated Power	Power Input	Power Output	Energy Efficiency Grade	Altitude
02131336	1500 W	200 V-240 V/6.8 A	+12 V/125 A 94.0%	Platinum	2000 m

6.6 OS and Software Support

Table 6-14 lists the OSs supported by the 2488 V5.

 **NOTE**

- Table 6-14** is for reference only. For details about component options, consult the local Huawei sales representatives.

Table 6-14 Supported OSs

OS	Description
SLES 12 SP2	SUSE Linux Enterprise Server 12 Service Pack 2 for Intel EM64T
CentOS 7.3	CentOS Linux 7 Update 3 Server for Intel EM64T
Citrix XenServer 6.2	Citrix XenServer 6.2
Citrix XenServer 6.5	Citrix XenServer 6.5
RHEL 7.3	Red Hat Enterprise Linux 7 Update 3 Server for Intel EM64T
Ubuntu 12.04	Ubuntu 12.04 LTS Server Edition for Intel EM64T
VMware ESXi 6.5	VMware ESXi 6.5
Windows 2012 R2	Microsoft Windows Server 2012 R2
Windows 2016	Microsoft Windows Server 2016

7 System Management

The server uses Huawei's proprietary Intelligent Baseboard Management Controller (iBMC) to implement remote server management. The iBMC complies with Intelligent Platform Management Interface (IPMI) 2.0 and provides highly reliable hardware monitoring and management.

The iBMC supports the following features and protocols:

- KVM and text console redirection
- Remote virtual media
- IPMI
- Simple Network Management Protocol (SNMP)
- Login using a web browser
- Redfish

Table 7-1 describes the features of the iBMC.

Table 7-1 iBMC features

Feature	Description
Management interface	Integrates with any standard management system through the following interfaces: <ul style="list-style-type: none">● IPMI● CLI● HTTPS● SNMP
Fault detection	Detects faults and accurately locates faults in hardware, for example, an FRU.
Alarm management	Supports alarm management and reports alarms using the SNMP trap, Simple Mail Transfer Protocol (SMTP), and syslog service to ensure 24/7 continuous operation.
Integrated virtual KVM	Provides remote maintenance measures and the VNC service for troubleshooting, and supports a maximum resolution of 1920 x 1200.

Feature	Description
Integrated virtual media	Virtualizes local media devices, images, USB keys, and folders into media devices on a remote server, simplifying OS installation. (The virtual DVD-ROM drive supports a maximum transmission rate of 8 MB/s.)
WebUI	<p>Provides a user-friendly graphical user interface (GUI), which simplifies users' configuration and query operations.</p> <p>The iBMC WebUI supports OSs, web browsers, and JRE of the following versions:</p> <ul style="list-style-type: none"> ● Windows 7 (32-bit); Internet Explorer 9/10/11, Mozilla Firefox 26/34, or Google Chrome 21/39; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later ● Windows 8 (32-bit/64-bit); Internet Explorer 9/10/11, Mozilla Firefox 26/34, or Google Chrome 21/39; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later ● Windows Server 2008 R2 (32-bit/64-bit); Internet Explorer 9/10/11, Mozilla Firefox 26/34, or Google Chrome 21/39; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later ● Windows Server 2012 R2 (32-bit/64-bit); Internet Explorer 9/10/11, Mozilla Firefox 26/34, or Google Chrome 21/39; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later ● Red Hat Enterprise Linux 6.0 (64-bit); Mozilla Firefox 26/34; Google Chrome 21/39; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later ● Mac; Safari 5.1; Mozilla Firefox 26/34; JRE 1.6.0 U25/1.7.0 U40/1.8.0 U45 or later
Fault reproduction	Reproduces faults to facilitate fault diagnosis.
Screen snapshots and screen videos	Allows you to view screenshots and videos without login, which facilitates routine preventive maintenance inspection (PMI)
Domain Name Service (DNS)/ Active Directory (AD)	Supports the DNS and AD, significantly simplifying network and configuration management.
Dual-image backup	Starts software from a backup image if the software fails.
Asset management	Supports intelligent asset management to manage and check assets being used in a unified manner.
Intelligent power management	Uses the power capping technology to increase deployment density, and uses dynamic energy saving to lower operating expenses.
IPv6	Supports IPv6 to help build an all-IPv6 environment.

Feature	Description
Network Controller Sideband Interface (NC-SI)	Supports NC-SI, which allows you to access the iBMC through the service network port.

8 Warranty

According to the *Huawei Warranty Policy for Servers & Storage Products* (*Warranty Policy* for short), Huawei provides a three-year warranty for the server, a one-year warranty for DVD-ROM drives and iBBUs, and a three-month warranty for software media.

The *Warranty Policy* stipulates warranty terms and conditions, including the available services, response time, terms of service, and disclaimer.

The warranty terms and conditions may vary by country, and some services and/or parts may not be available in all countries. For more information about warranty services in your country, contact Huawei technical support or the local Huawei representative office.

9 Certifications

No.	Country/ Region	Certification	Standards
1	China	RoHS	SJ/T 11363—2006 SJ/T 11364—2006 GB/T 26572—2011
2	China	CCC	GB4943.1-2011 GB9254-2008(Class A) GB17625.1-2012

No.	Country/ Region	Certification	Standards
3	Europe	CE	<p>Safety: IEC 60950-1:2005(2nd Edition)+A1:2009 and/or EN 60950-1:2006+A11:2009+A1:2010+ A12:2011</p> <p>EMC: EN 55022:2010 CISPR 22:2008 EN 55024:2010 CISPR 24:2010 ETSI EN 300 386 V1.6.1:2012 ETSI ES 201 468 V1.3.1:2005 IEC 61000-3-2:2005+A1:2008+A2:2009/EN 61000-3-2:2006+A1:2009+A2:2009 IEC 61000-3-3:2008/EN 61000-3-3:2008 IEC 61000-6-2:2005/EN 61000-6-2:2005 IEC 61000-6-4:2006+A1:2010/EN 61000-6-4:2007+A1:2011</p> <p>RoHS: 2002/95/EC, 2011/65/EU, EN 50581: 2012</p> <p>REACH: EC NO. 1907/2006</p> <p>WEEE: 2002/96/EC, 2012/19/EU</p>
4	America	FCC	FCC CFR47 Part 15:2005 Class A
5	America	Energy Star	ENERGY STAR® Program Requirements for Computer Servers
6	Canada	IC	ICES-003:2004 Class A
7	Australia	C-tick	AS/NZS CISPR 22:2009
8	Japan	VCCI	VCCI V-3:2012
9	Saudi	SASO	IEC 60950-1: 2005 (2nd Edition) + A1:2009 EN 60950-1:2006+A11:2009+A1:2010 + A12:2011
10	Nigeria	SONCAP	IEC 60950-1: 2005 (2nd Edition) + A1:2009 EN 60950-1:2006+A11:2009+A1:2010 + A12:2011

No.	Country/ Region	Certification	Standards
11	Kuwait	Kucas	IEC 60950-1: 2005 (2nd Edition) + A1:2009 EN 60950-1:2006+A11:2009+A1:2010 + A12:2011